

Features

- Adjustable showerhead for a customized showering experience.
- Can be used as a showerhead, handshower or both, to create nine unique spray combinations.
- Advanced spray engine provides three spray experiences: full coverage, silk, massage, and pause feature.
- Full coverage spray produces an encompassing spray ideal for everyday use.
- Silk spray releases a dense, luxurious spray ideal for rinsing.
- Powerful massage spray is a focused stream that targets sore muscles, or use as a utility spray to rinse kids, pets, and your shower.
- Simple thumb tab smoothly transitions between sprays.
- Box includes: showerhead, handshower, 60" (1524 mm) metal hose, shower rail.
- Innovative docking system enables handshower to easily slide into place for quick, easy docking and undocking.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- G 1/2 connection.
- 1.75 gpm (6.6 lpm) maximum showerhead/handshower flow rate at 45 psi (3.1 bar).

Material

- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Uses a standard adjustable wrench to tighten.

Included Components

Additional Components:

60" metal shower hose
Handshower
Shower rail
Showerhead



Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

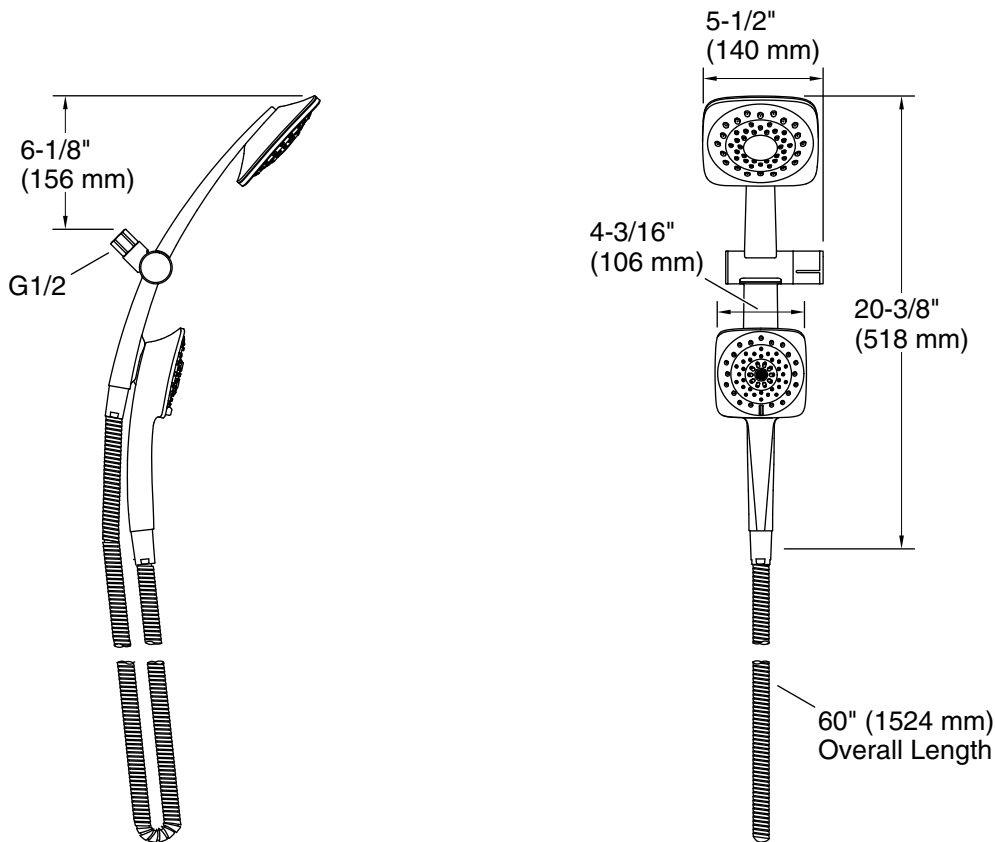

Technical Information

All product dimensions are nominal.

Drain included: No

Handshower:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 45 psi (3.1 bar)

Showerhead/Body Spray:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 45 psi (3.1 bar)

Notes

For use with automatic compensating valves rated at 1.3 gal/min (4.9 l/min) or less.

Install this product according to the installation instructions.