



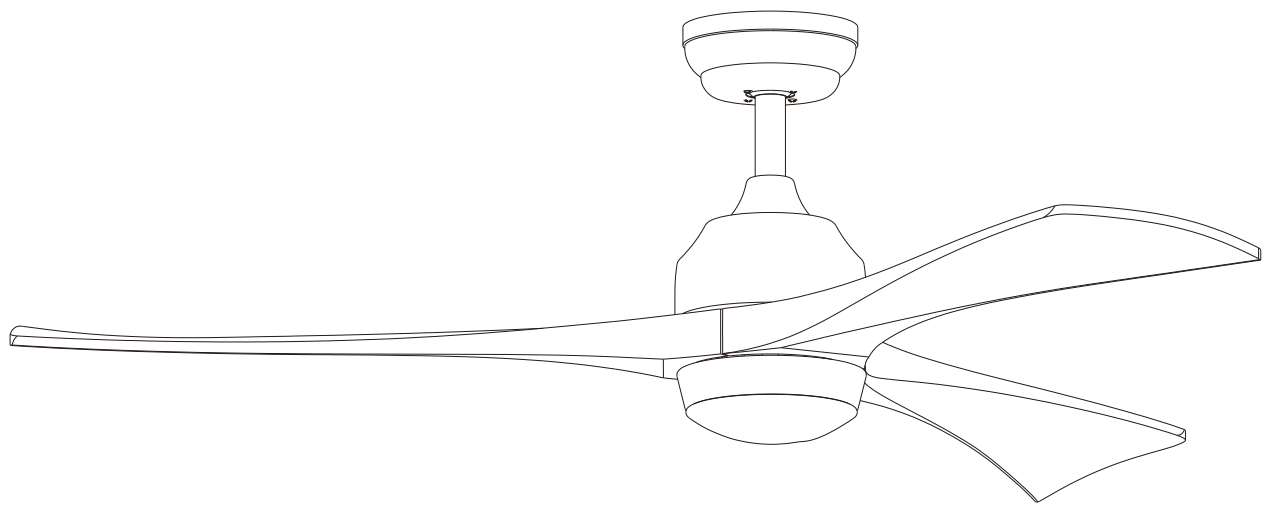

52-INCH DEROCATE CEILING FAN
USE AND CARE GUIDE

Installation of the hanging bracket

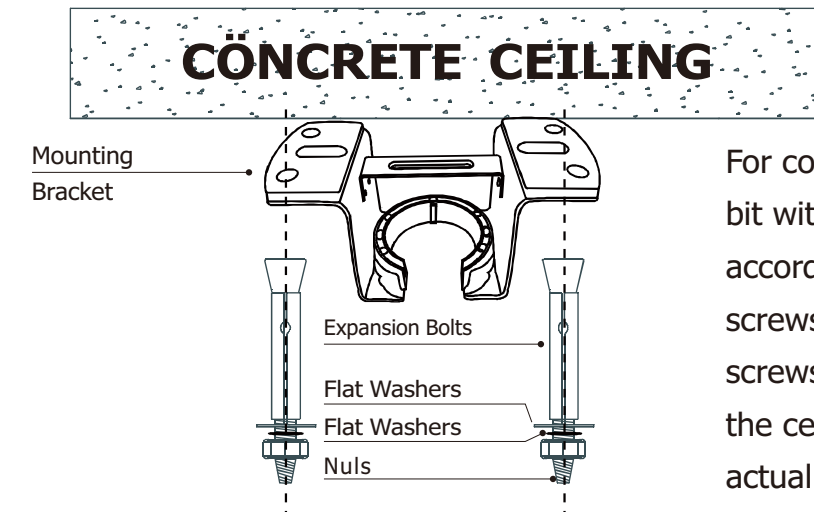


For concrete ceiling, use the percussion bit with diameter 8mm to drill holes according to the length of expansion screws. Then use the attached expansion screws to fix the hanging bracket onto the ceiling (selection is made according to actual requirements of the customers).

STEP 1 A-CONCRETE CEILING

SWITCH OFF THE ELECTRICAL MAINS AT THE CIRCUIT BREAKER FUSE BOX.
1)Use the Mounting Bracket as a guide, mark the spots where the 4 Expansion Bolts will be drilled.
2)Remove the Mounting Bracket , drill 2 holes and insert 2 Expansion Bolts into the concrete ceiling, install the mounting bracket and secure with Flat Washers , Spring Washers and Nuts .

IMPORTANT : SCREWS & NUTS MUST BE TIGHTENED TILL SNUG

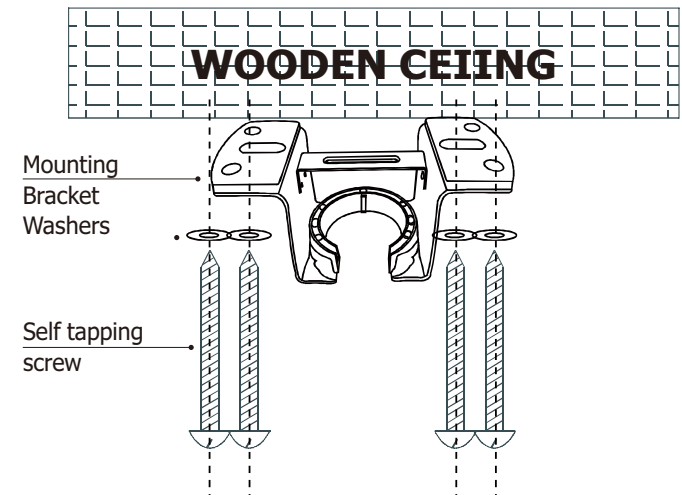


For wooden ceiling, use wood screw to drill on the wooden beam or the "junction box" to fix the hanging bracket(selection is made according to actual requirements of the customers)

STEP 2 A-WOODEN CEILING


SWITCH OFF THE ELECTRICAL MAINS AT THE CIRCUIT BREAKER FUSE BOX.

1) Use the Mounting Bracket as a guide, mark the spots where the 4 Self Tapping Screws will be drilled.
2) Remove the Mounting Bracket , drill 4 holes for 3MM diameter, install the mounting bracket onto wooden ceiling with the 4Self Tapping Screws &Washers

Pre-Installation

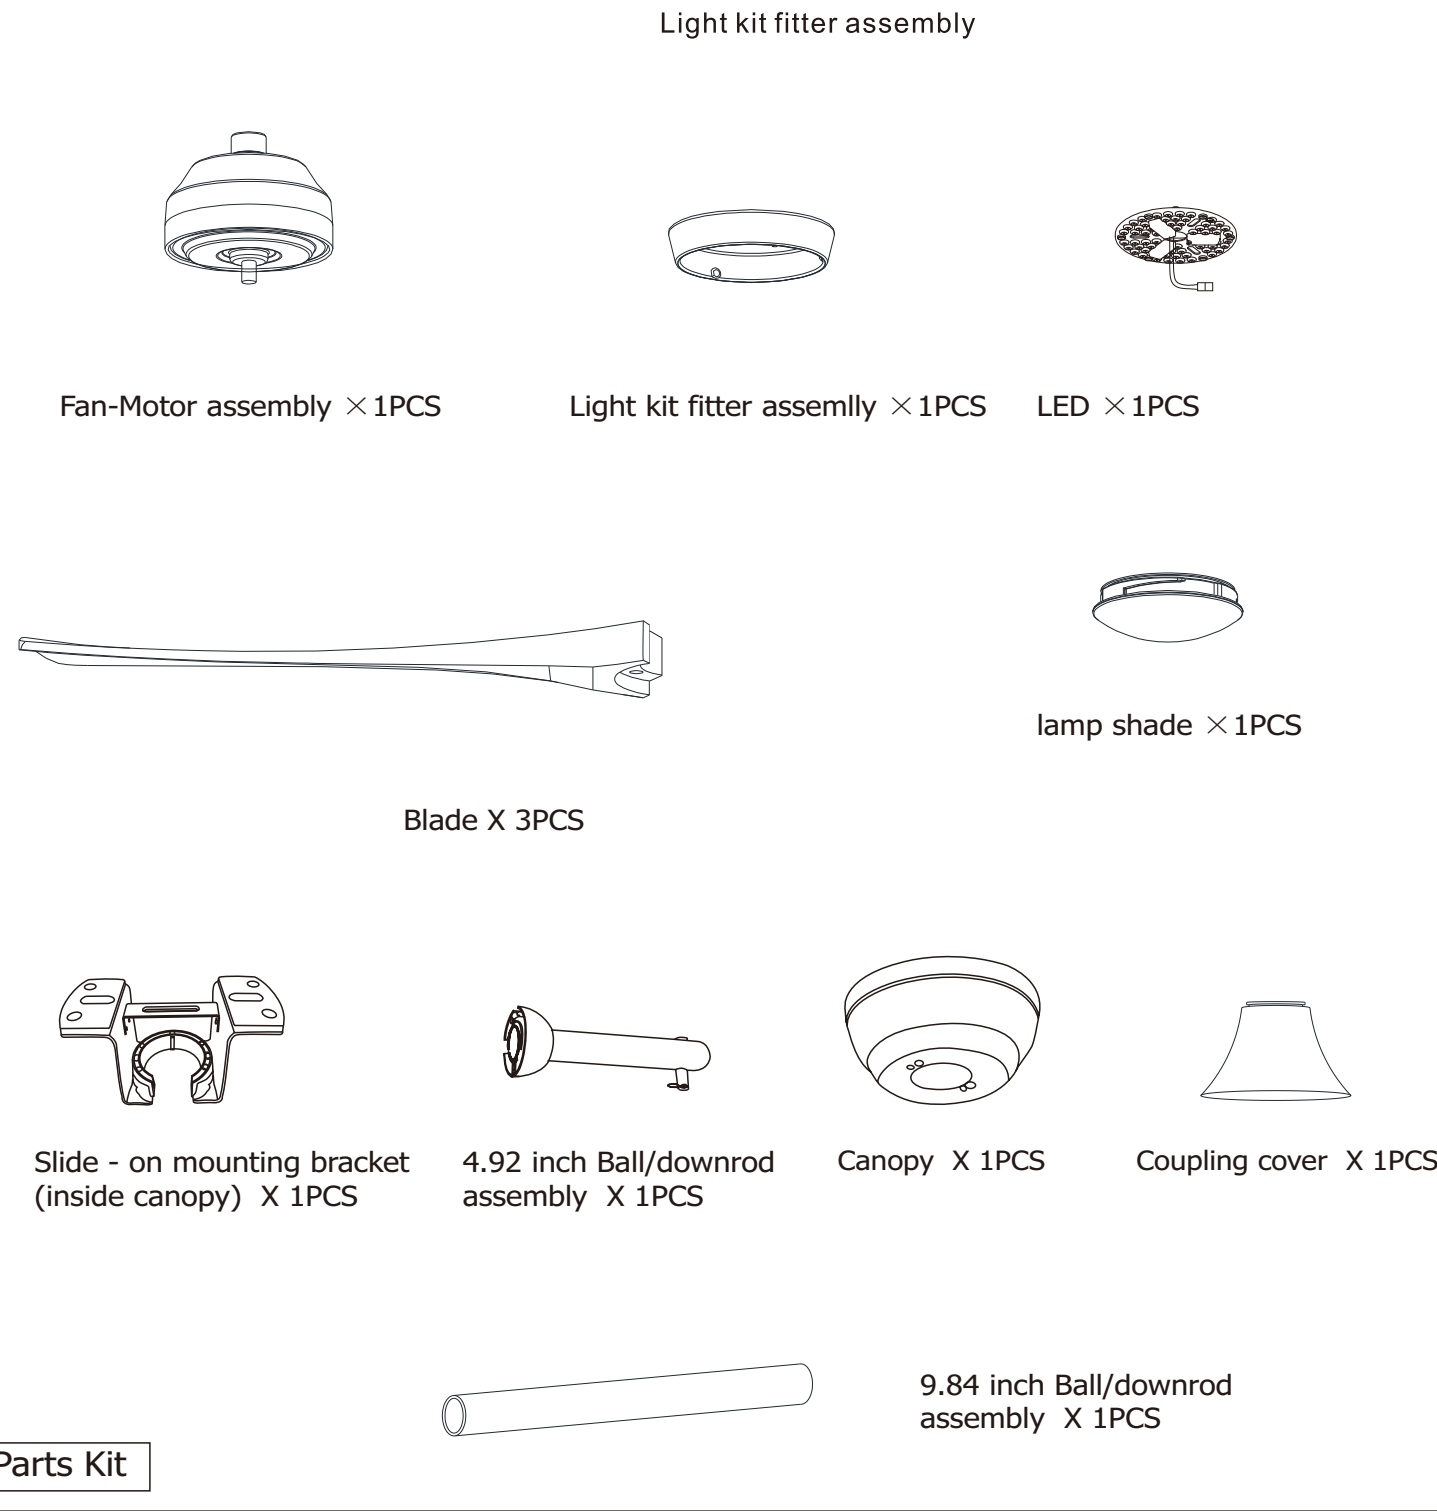


Parts Kit

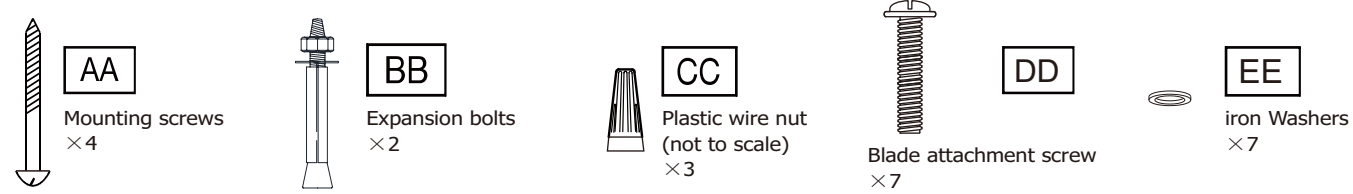


NOTE Hardware not shown to actual size.


Install downrod assembly

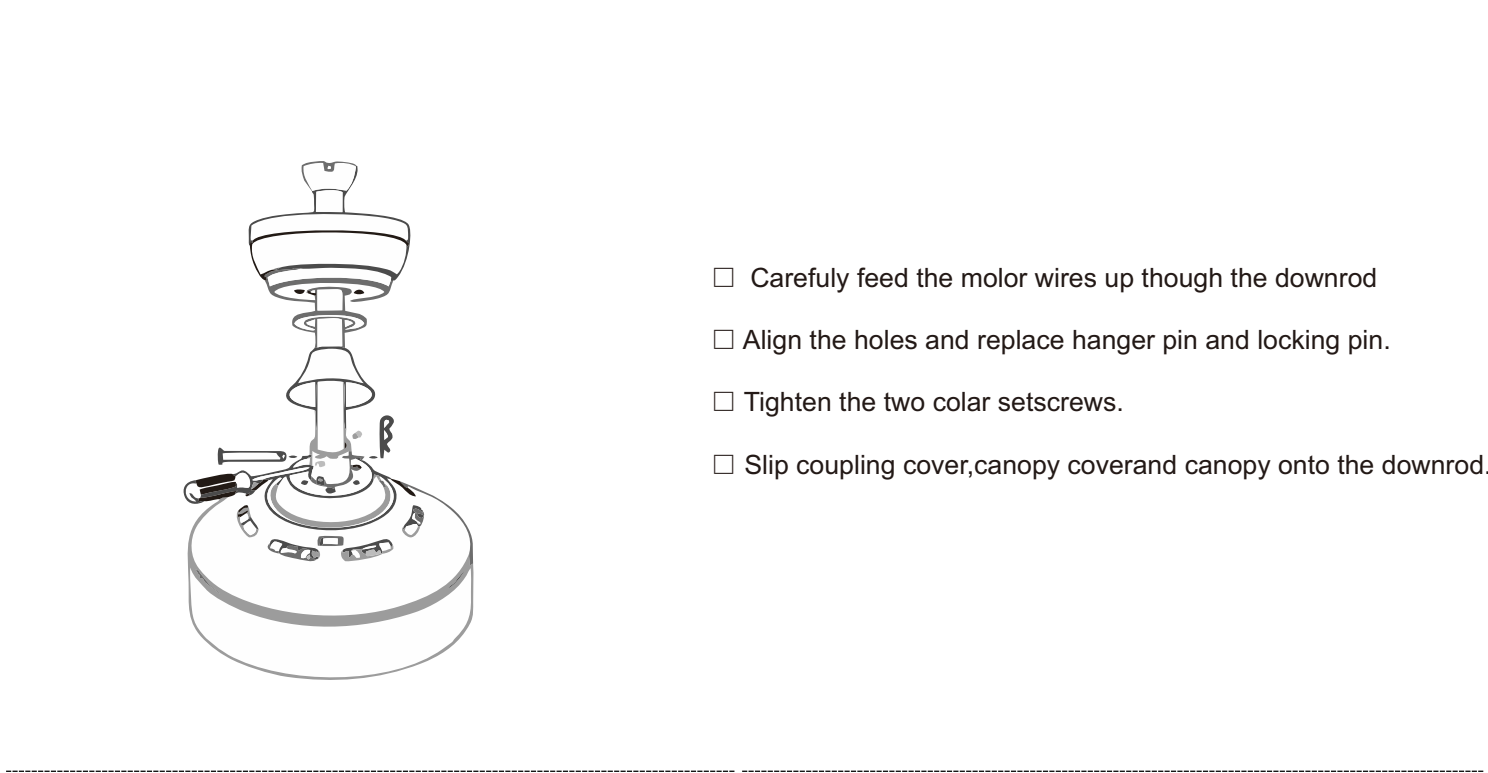


Hang the fan

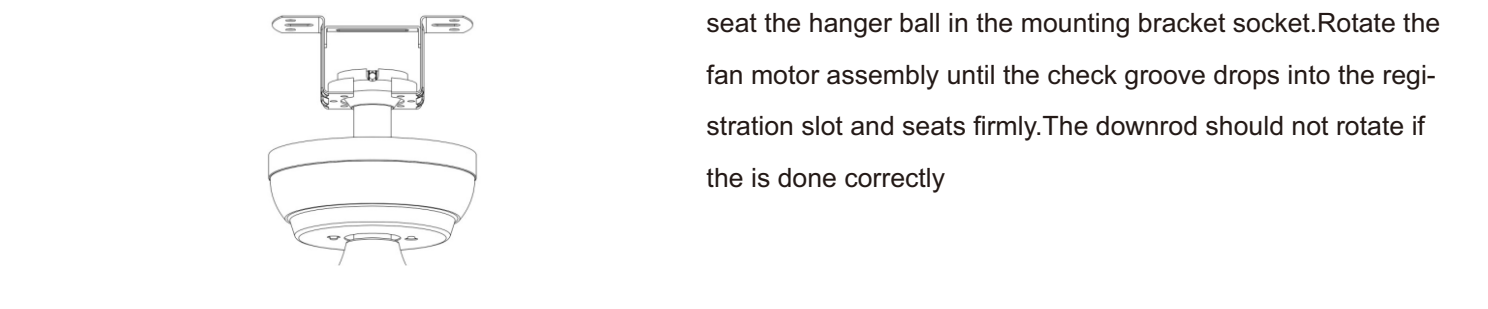


Install canopy

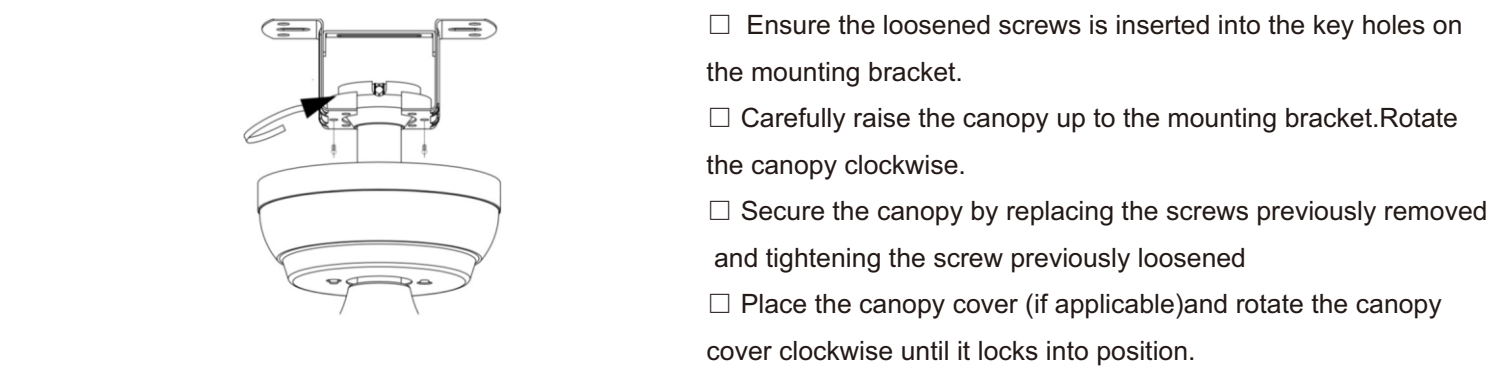


Install downrod assembly

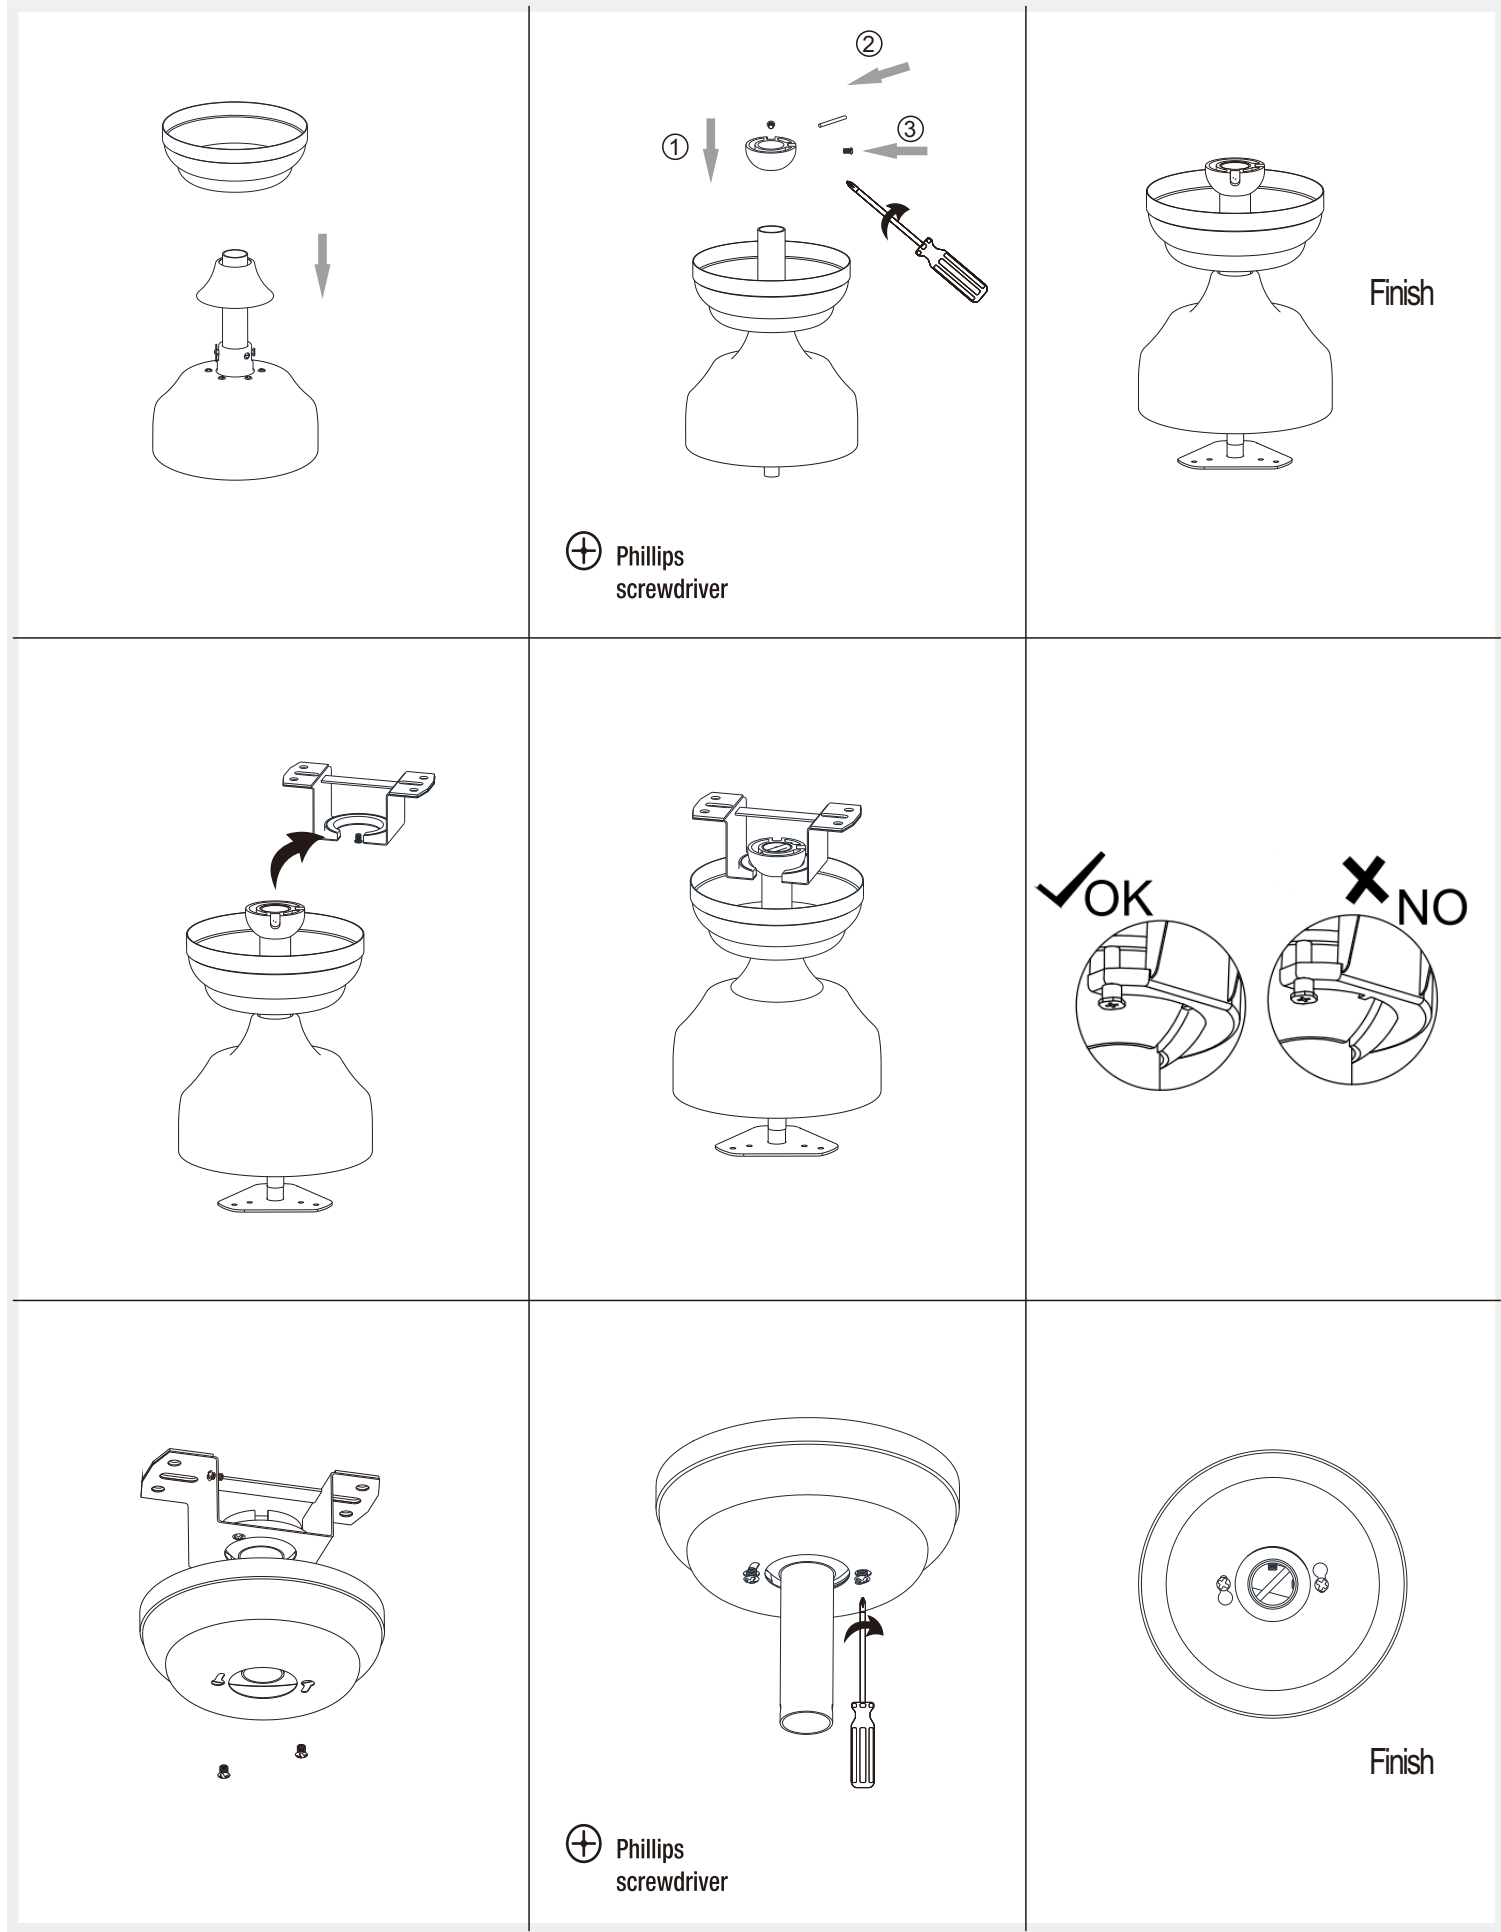


Making the electrical connections

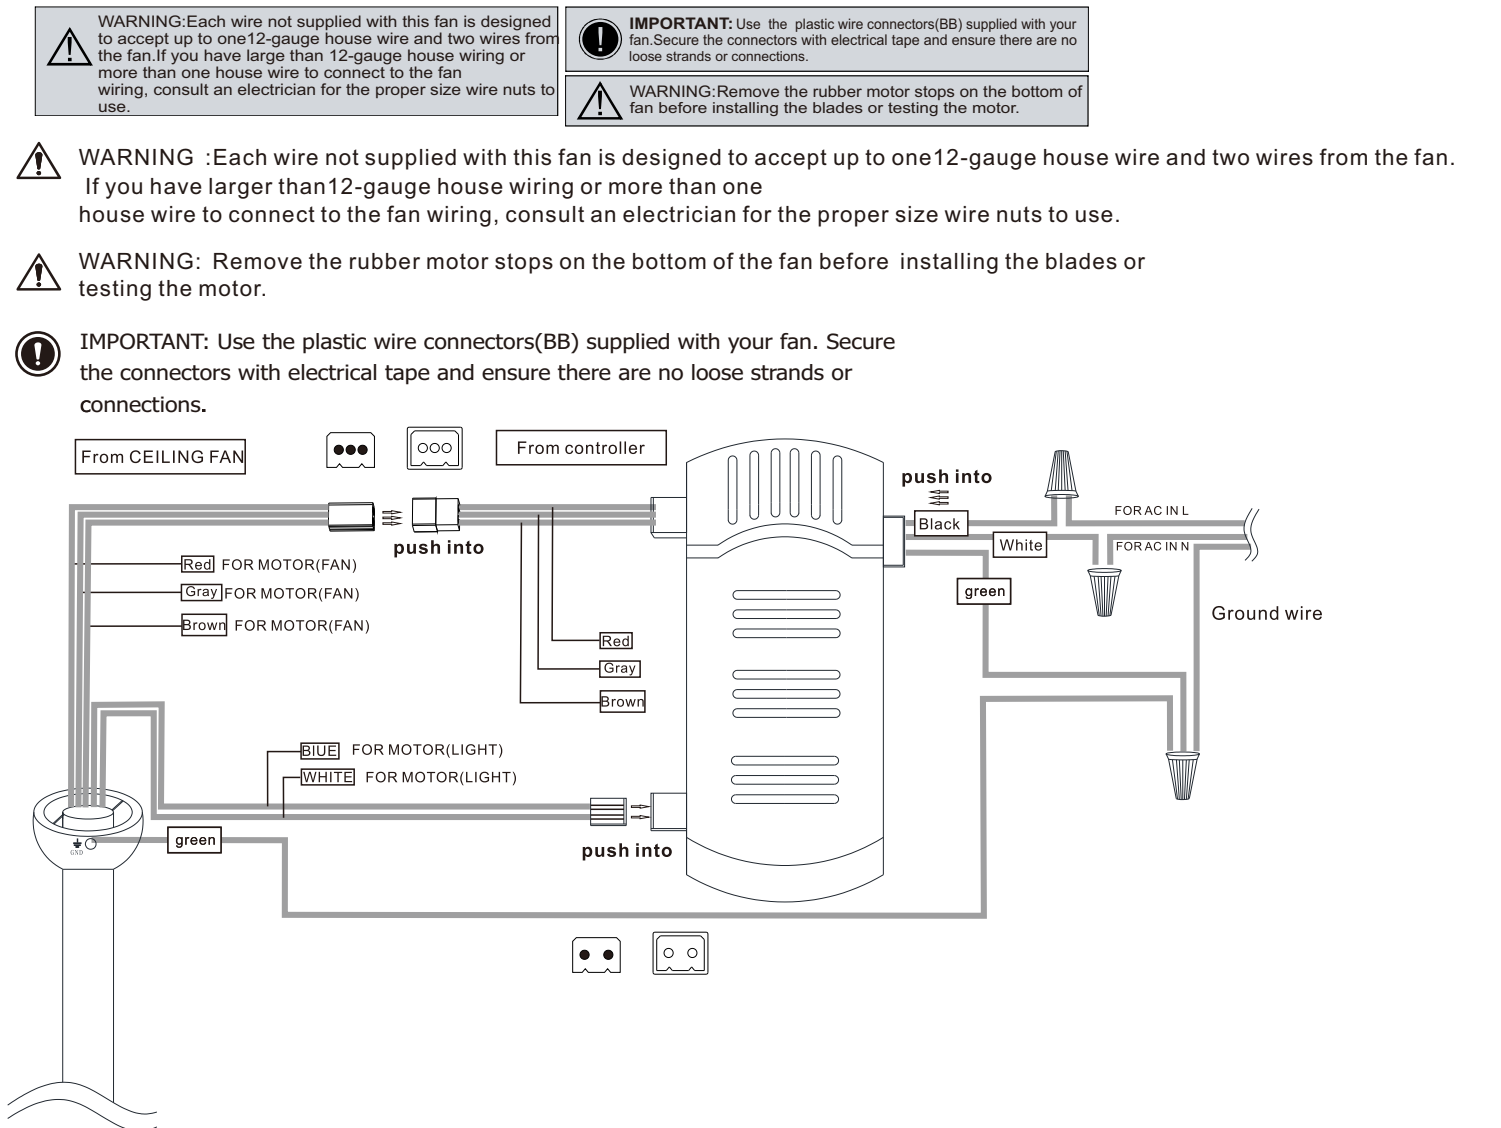

Install remote control

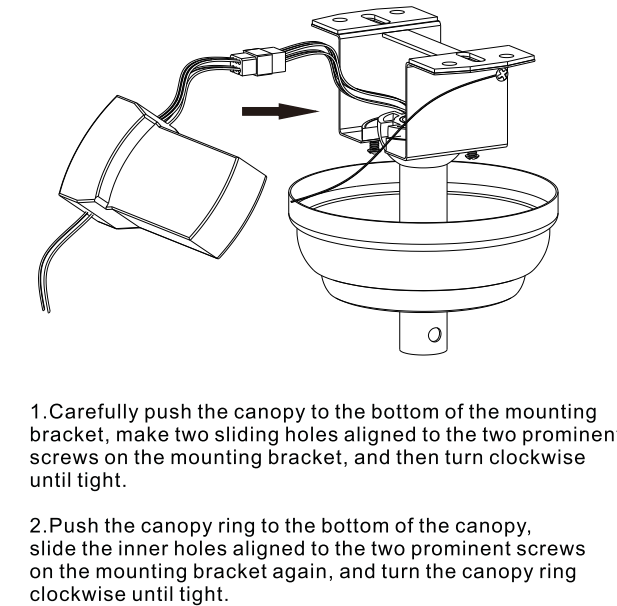


Preparing for mounting

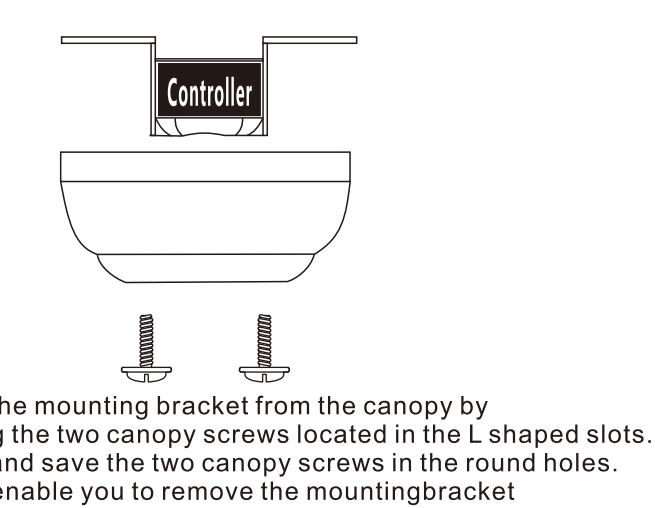

LIGHT MUST BE KEPT AT THE ON POSITION
FAN MUST BE KEPT AT THE HIGH SPEED

Fastening the blade arms to the motor

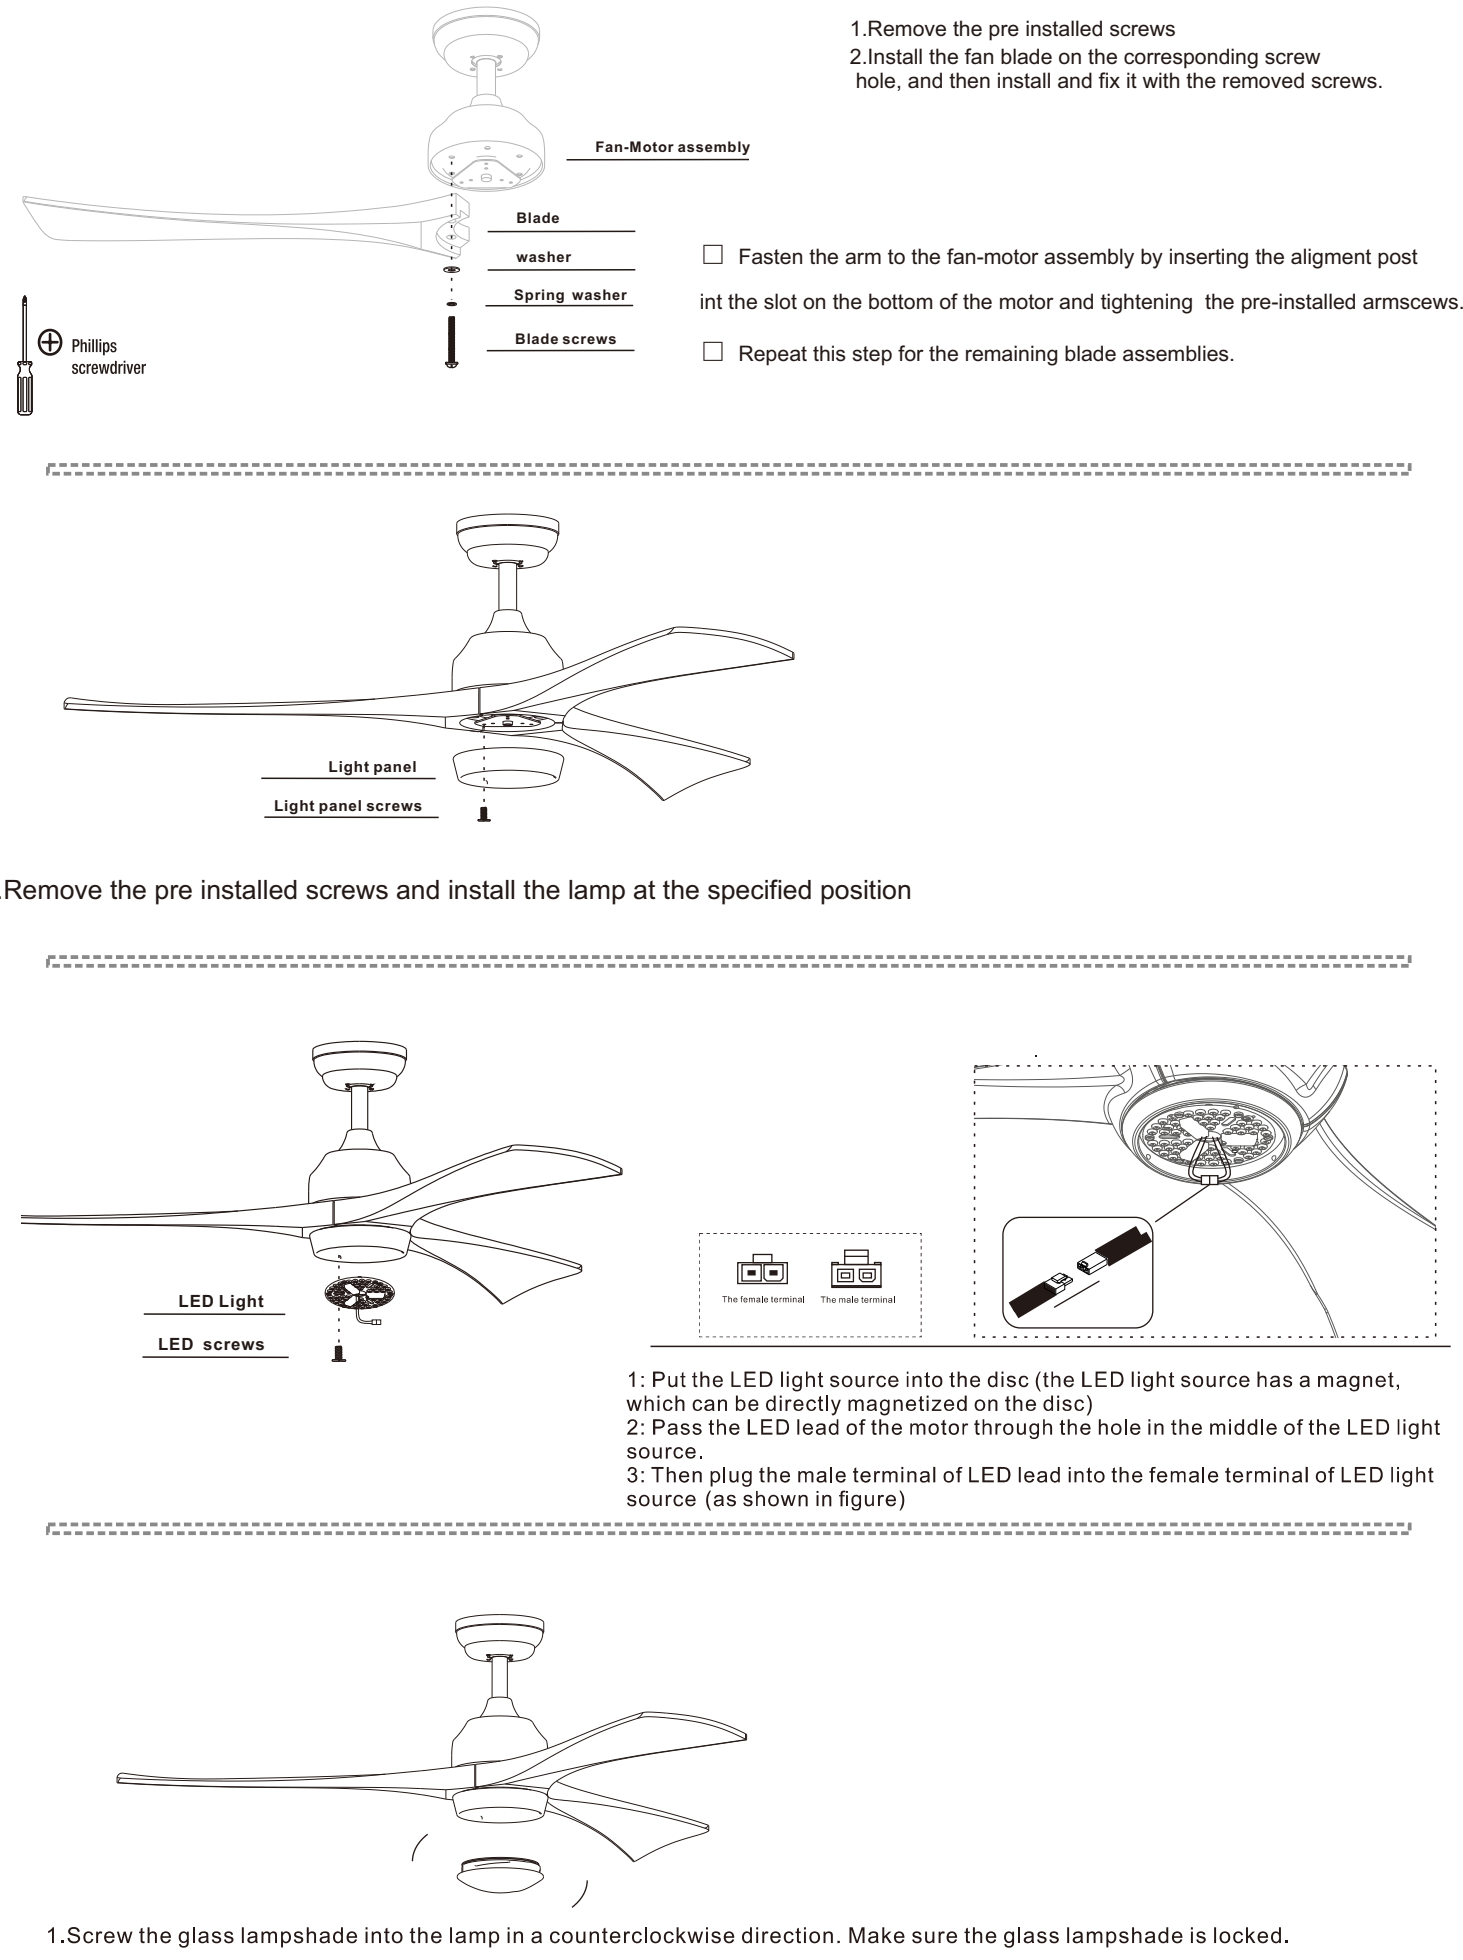

Use of remote control

REMOTE CONTROL MANUAL

FUNCTION INSTRUCTIONS:

- ⊕ Fan Rotating Direction
- ⊖ Natural wind
- ⊕ Fan speed control/ Fan on
- ⊖ Fan off
- ⊕ Light on
- ⊖ Mute
- ⊕ Light off
- ⊖ Timer

Note**
Remote control pairing: Turn off main power for one minute; Turn on power, within 10 seconds, press ⊕ Fan off ⊖ button(⊕) until hearing "beeb" sound, pairing successful!

If the remote control is not working **
1.Please check if the batteries installed correctly.
2.Exclude using same kind of remote controls nearby.
3.Please check if the main power within the rated power.

