

LED Post Top Light Series



Special Order: 4,000K



FEATURES

- IP65 rated
- Photocell included
- Rust & corrosion proof
- No lead or mercury
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Area lighting
- Parking decks
- Auto dealerships
- High masts
- Housing complexes
- Shopping malls
- Sporting complexes
- Parks and Recreational areas
- Municipal lots

CONSTRUCTION:

Polyester powder-coated finish

OPTICAL SYSTEM:

Philips Lumileds 3030 LED chips. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Pole mounting

CONTROLS & DIMMING:


0-10V dimming comes standard.



MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOD-PT-60W-40K-LV-V12	60W	6,765.76LM	105.03LM/W	83.9	0.912	18%	100W HID
LOD-PT-60W-50K-LV-V12	60W	6,750LM	107LM/W	80	0.91	18%	100W HID
LOD-PT-80W-40K-LV-V12	80W	8,816.53LM	110.1LM/W	83.7	0.925	16%	50W HID
LOD-PT-80W-50K-LV-V12	80W	8,950LM	111.88LM/W	80	0.93	16%	50W HID
LOD-PT-150W-40K-LV-V12	150W	16,172.6LM	111.92LM/W	82.8	0.947	13.4%	50W HID
LOD-PT-150W-50K-LV-V12	150W	16,200LM	108LM/W	70	0.95	13.4%	50W HID

Series	Wattage	Color Temperature	Type	Version
LOD-PT	60W 80W 150W	4000K 5000K	LV – 120-277V	V12 = Driver Model

MEASUREMENTS


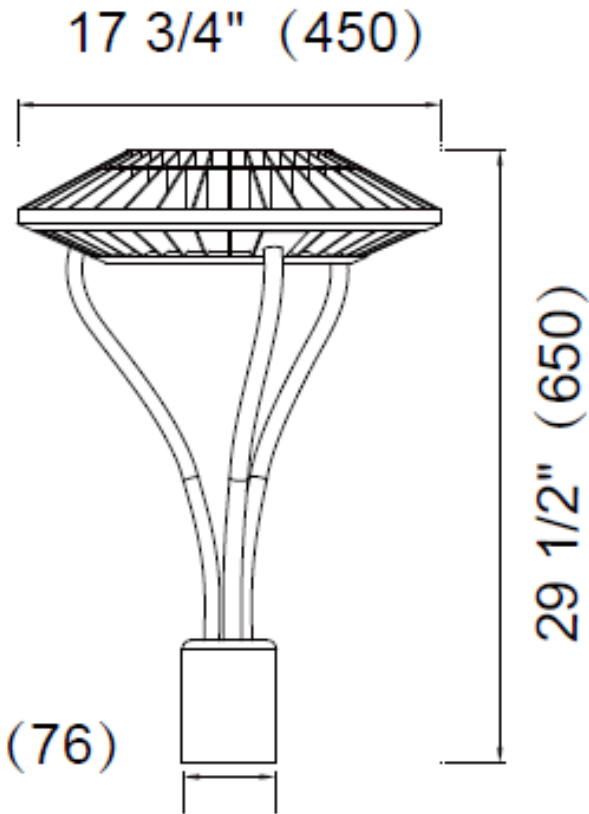


MODEL	QUANTITY	WEIGHT	UPC CODE
LOD-PT-60W-50K-LV-V12	1	15 lbs	00810050940221
LOD-PT-80W-50K-LV-V12	1	15.43 lbs	00810050940238
LOD-PT-150W-50K-LV-V12	1	17.20 lbs	00810050940245

EPA: 1.96

60W



Length	Width	Square Feet	Adjustable Coefficient
17.70"	17.70"	2.18	0.90

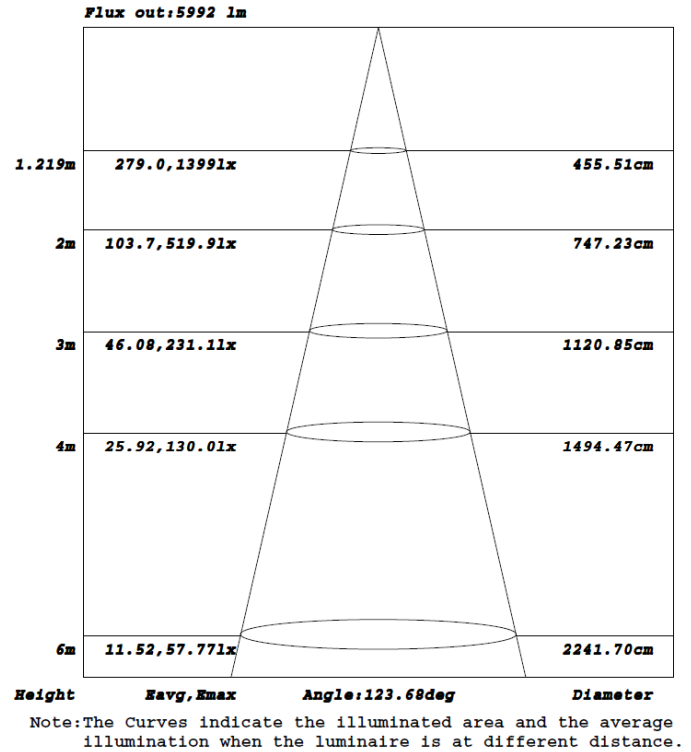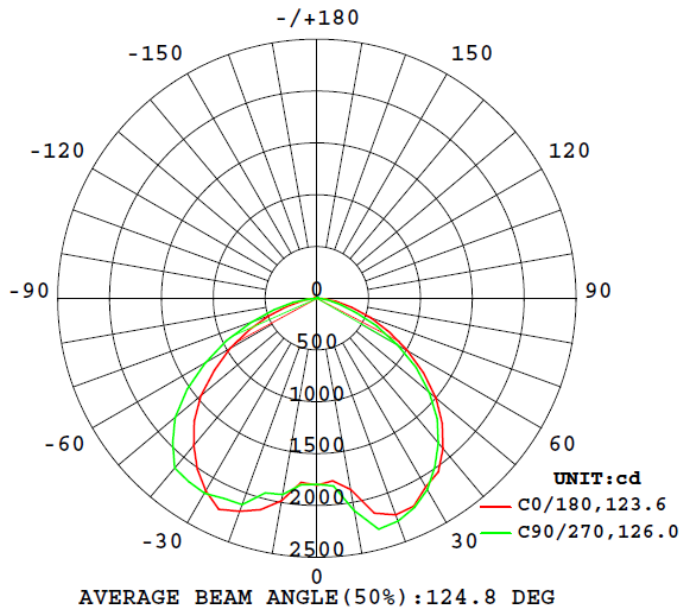

EPA: 1.96

80W

Length	Width	Square Feet	Adjustable Coefficient
17.70"	17.70"	2.18	0.90

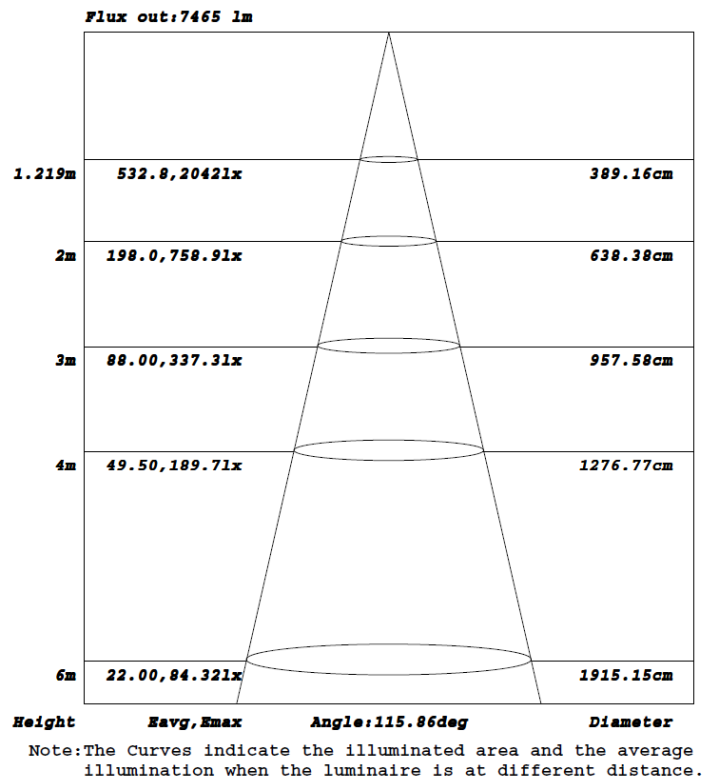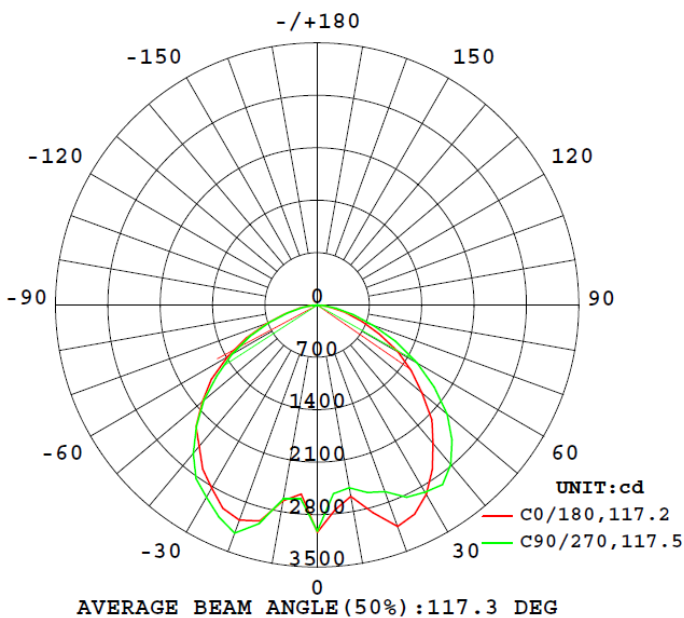

EPA: 1.96

150W

Length	Width	Square Feet	Adjustable Coefficient
17.70"	17.70"	2.18	0.90

