

Models:



- 7002011
- 7002031
- 7002041
- 7002051

Finish:


- Matte Black
- Brushed Nickel
- Brushed Gold
- Gunmetal

Application Instruction

Gradually pull the handle, it will be more advantageous to protect the cartridge.



Standard Part List

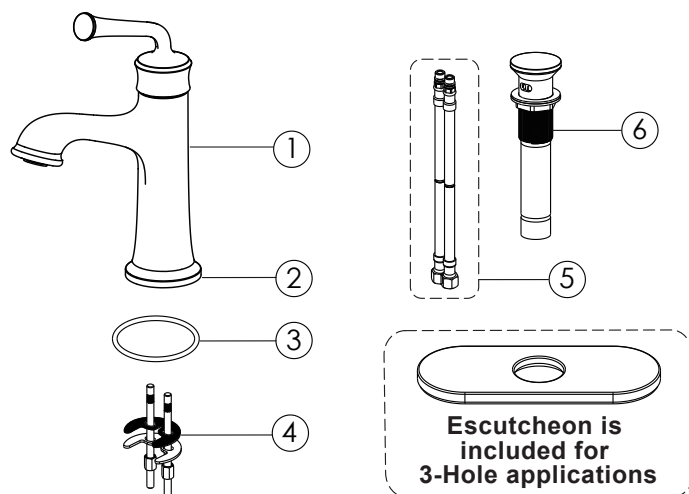

NO.	Part Name	Quantity
1	Body Assy	1
2	Base	1
3	O-Ring	1
4	Fitting Assy	1
5	Water Supply Hose	2
6	Pop-up	1

· Every once in a while, please rinse the faucet with lukewarm soapwater, and wipe it clean with a soft duster cloth.
Please avoid any abrasive cleaners, steel wools, or corrosive chemicals.

BEFORE INSTALLATION

- To insure proper installation, please read the following instructions carefully.
- Please make sure that the water supply has been shut off at the stop valve.
- NEWATER reserves the right to update product without notice.

Installation Steps

1

1. Make sure there is a Ø30-Ø33 Hole on the basin before fix the mixer. Unscrew the ④ fitting ASSY from the bottom of the ① body, then get the ① body through the hole, don't forget to fix the ③ o-ring between the bottom of the ① body and the basin.

2

2. According the remove step to screw up the fixing set to the mixer below the basin. Use hand to screw up the locknut, then use install tool for fixing strengthen.

3

3. Connect the ⑤ inlet hose from the ① body. "Red" for connecting to the hot water, and "Blue" for connecting to the cold water.

4

4. Install the ⑥ pop-up.