

INSTRUCTIONS

SKU: HCF-2002-00



WARNING!

Read these instructions carefully prior to installation.

- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- **ALWAYS** cut ALL relevant power before installing a lighting fixture, and do not restore power to the line until the lamp has been FULLY installed.
- Take care to not over-tighten the screws for the glass shade.
- Do NOT use with bulbs exceeding the recommended wattage.


PART LIST

Light Fixture × 1

Glass Shade × 1

ASSEMBLY

1. Prepare the wiring in your wall and ceiling for the desired location of your new lamp. Prepare your junction box.
2. Figure out your desired height for the lamp. If you need shorten the power cord, loosen cord screw E in canopy B and cut the cord to a few inches longer than the desired length with wire cutters. Remember to re-lock the cord screw E.
3. Take wall bracket C off canopy B. Connect your wall bracket C to your junction box using screws D.
4. Make electrical connections using the wire nuts H.
5. Being careful that no wiring is left exposed, place canopy B against the mounting surface. Secure the canopy B to wall bracket C with the 2 previously removed canopy screws F.
6. Install your bulb into the socket. This fixture has been rated for up to **one (1) E26 40-watt maximum bulb (not included)**.
7. Attach lamp shade A to the socket assembly and secure it with shade screws G, taking care not to over-tighten them.

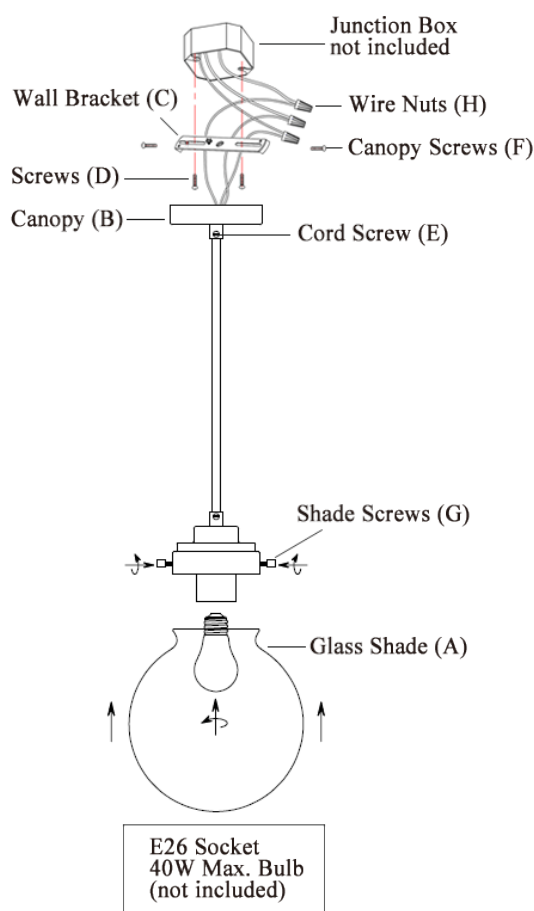

CONTACT US

Thank you for choosing our products! If you have any questions or comments, contact us at help@cs-supportpro.com and we'll resolve your issue ASAP!

For a .pdf copy of the latest version of these instructions, use the appropriate app on your smartphone to scan the QR code to the right.

