

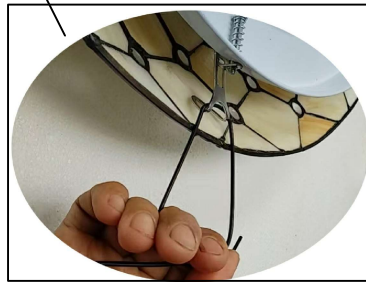
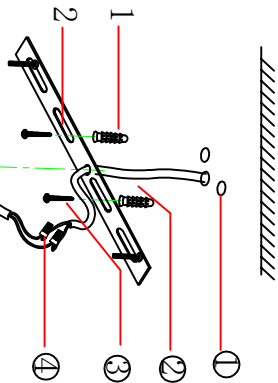


INSTALLATION

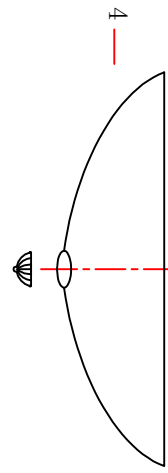

installation steps


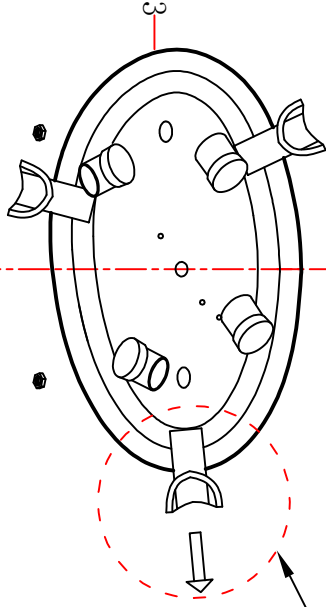


1. First, adjust the spacing of the hanging board screws properly, and then fix them to the ceiling of the roof.
2. Fix the white plate with the light source onto the hanging board, and mark the position of the spring hook on the white plate.

3. Place the lampshade with the light source inside, then insert the lampshade into the other two hooks. Pull the spring hook forcefully, then close the lampshade, and finally release the hook. (Do not squeeze the lampshade to cause it to deform or break.)

Ceiling Lamp

100-240V
50Hz/60Hz
MAX: 60W

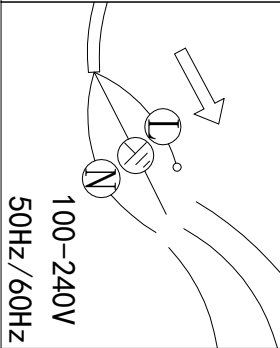

Installation: Cautions:

- 1 Drill a hole in the ceiling.
 - 2 Insert the expansion bolt in the ceiling.
 - 3 Mount the crissbar by screws.
 - 4 Connect the cable.
 - 5 Mount the bracket.
 - 6 Put the lamp shade and light source.
- Should be installed by professional person during the cleaning and installation remember to cut the power off
 - Keep the lamps away from corrosive chemical and air such as acid and alkali.
 - Do not wash it with water, but wipe it clean with a soft cloth.

Accessory List

No	Part Name	Photo	QTY
1	Screw		1
2	hanging board		1
3	Light Source		1
4	The lampshade		1