KOHLER®

Features
- Frameless, 1/4-inch-thick Frosted tempered glass.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides quiet sliding action.
- Vertical blade handles accentuate the contemporary style.
- CleanCoat™ glass treatment repels water for improved ease of cleaning.

Installation
- Sliding bath door.

Codes/Standards
ANSI Z97.1 (Tempered Glass)
CPSC 16CFR 1201

Kohler One-Year Limited Warranty
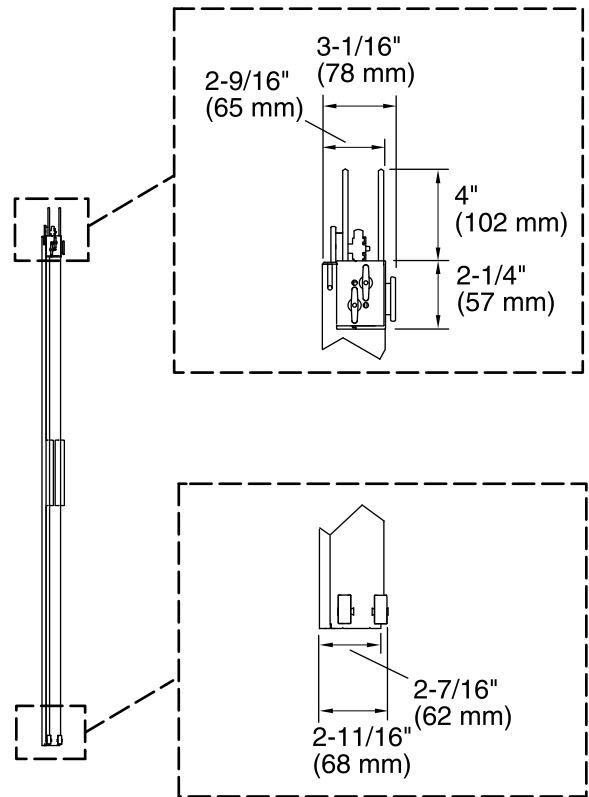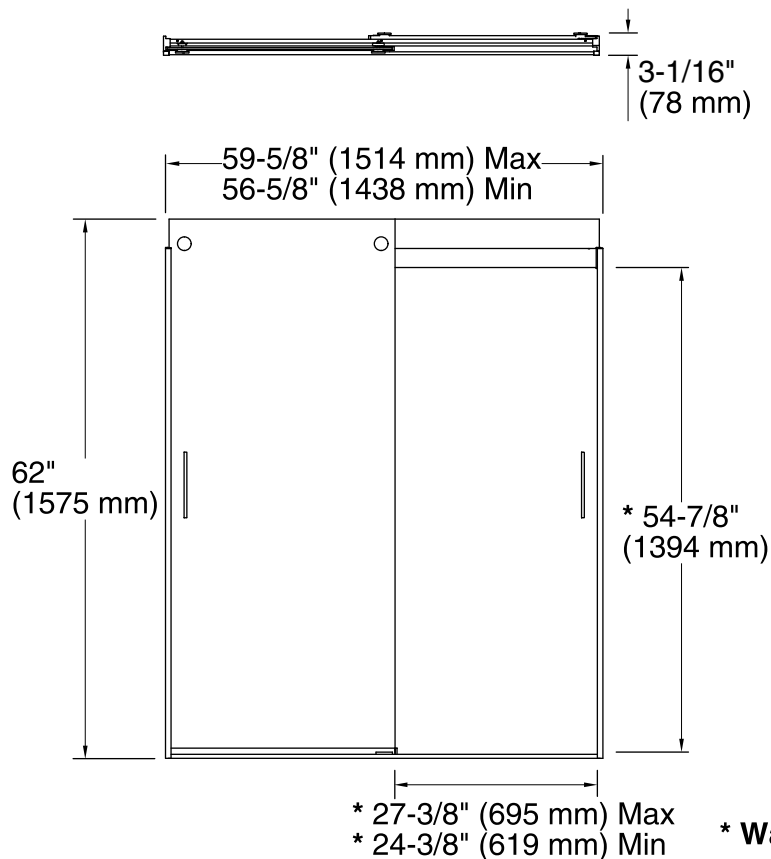See website for detailed warranty information.

Available Color/Finishes
Color tiles intended for reference only.

Color	Code	Description
	SH	Bright Silver
	MX	Matte Nickel
	ABV	Anodized Brushed Bronze
	ABZ	Anodized Dark Bronze

Available Glass Options

Code	Description
D3	Frosted

USA/Canada: 1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
7-28-2017 06:39

THE BOLD LOOK OF **KOHLER**®

3-1/16"
(78 mm)

59-5/8" (1514 mm) Max
56-5/8" (1438 mm) Min

62"
(1575 mm)

* 54-7/8"
(1394 mm)

* 27-3/8" (695 mm) Max
* 24-3/8" (619 mm) Min

* **Walk-through**

3-1/16"
(78 mm)

2-9/16"
(65 mm)

4"
(102 mm)

2-1/4"
(57 mm)

2-7/16"
(62 mm)

2-11/16"
(68 mm)

Technical Information
All product dimensions are nominal.

Installation type:	For bath installation
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	24-3/8" (619 mm)
Walk-through - Max:	28-1/8" (714 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

Notes
Install this product according to the installation guide.

The vertical opening should be a minimum of 64-1/2" (1638 mm) to allow for installation clearance.

USA/Canada: 1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
7-28-2017 06:39

THE BOLD LOOK OF KOHLER®