



## MODEL L32, L33, & L35

**INOSURE®**  
LEVER CONNECTORS

### FEATURES/BENEFITS:

- 10 AWG Solid/Stranded capability for high current applications
- 2-, 3-, & 5-Port options to address just about any application
- Low lever force may reduce risk of repetitive trauma injury
- Wide wire range for easy installation at pre-fabrication and in field
- Clear housing enables easy verification of connection
- Ground rating eliminates need for special "ground" connector

### ELECTRICAL:

#### VOLTAGE:

General: 600V Max.

Signs/Luminaires: 1000V Max.

#### AMPERAGE:

30A (41A IEC 60998)

### MECHANICAL:

Compact size to fit into confined junction boxes

Wide levers ease actuation

Profiled housing for improved grip

Reusable solid and stranded wire

### PHYSICAL:

HOUSING: PC (Transparent)

LEVERS: Nylon

Contacts: Copper

Plating: Tin

Temperature: 105°C (221°F)

Strip Length: 0.47"-0.55" (12-14mm)

Color: Blue/Transparent

### STANDARDS & SPECIFICATIONS:

UL/cUL 486C, 467 Grounding - E5238

CE Certified

IEC/EN 60998

RoHS Compliant

UKCA

UL 94 V2 Flame Rating

### WIRE RANGE:

#### Conductor Type:

AWG

#### STRIP LENGTH

Copper (Solid & Stranded)

22 - 10 AWG (0.5-6mm<sup>2</sup>)

0.47"-0.55" (12-14mm)

Solid Copper-Clad Aluminum




12 - 10 AWG

Stranded Copper Tin Bonded

22 - 10 AWG

Listed for use with Cu AND CC-Cu. Do not use on Aluminum.

### DIMENSIONS:

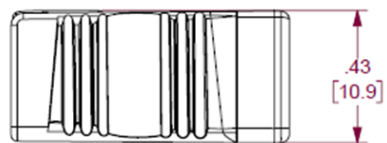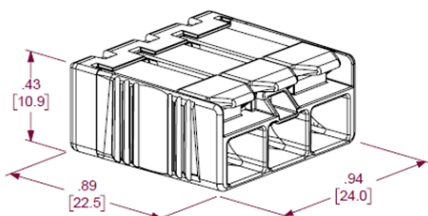

### ORDERING INFO:

Catalog #	Model	Ports	Quantity	Weight Lbs. (Kg)
30-16L32	L32	2	Box of 1,000	8.11 (3.67)
30-16L33	L33	3	Box of 1,000	11.51 (5.22)
30-16L35	L35	5	Box of 500	9.44 (4.28)

### FACTORY CONTACT:

IDEAL INDUSTRIES, INC.

1375 Park Avenue; Sycamore, IL 60178

Ph: (800) 324-9571

Fax: (888) 222-6140

E: [oem@idealindustries.com](mailto:oem@idealindustries.com)

### NOTES:

REVISED: August 2024