
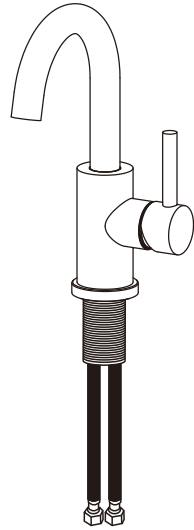




INSTALLATION INSTRUCTIONS


Included In the Package:

1  Bathroom Faucet	2  Rubber Gasket	3  Steel Gasket	4  Mounting Washer
	5  Screw	6  Deck Plate	7  Pop up Drain

Before Installation:

- Turn off the water supply: Before you begin, turn off the water supply to the bathroom.
- Clean the sink to make sure that the new faucet can be installed on a clean surface.



Will This Faucet Fit Your Basin?

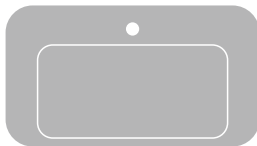

1Hole ✓



3Hole ✓

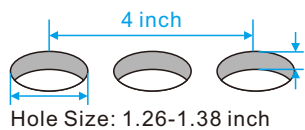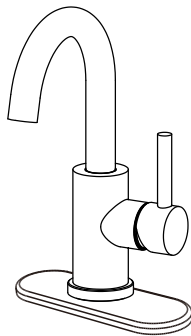

Max Deck Thickness : 1.38 inch

Hole Size: 1.26-1.38 inch

Installation Requirements:

- Suitable for 1 or 3 hole basin sink.
- Recommended width of mounting area is between 15cm-31cm(6"-12")measured between centers of outside mount holes.
- Diameter of mount holes must be between 25.4mm-38mm (1.00"-1.50")
- Max countertop thickness is 35mm (1.38").
- Water pressure Min 0.05MPa(7 psi)/Max 0.75MPa(109psi).
- Water temp Min≥20°C(68°F)/Max≤ 85°C(185°F).

After-Sale Service:


Need help with parts, assembly, usage support, or warranty?

Please contact us: service@forious.com

Please click to : www.forious.com


INSTALLATION INSTRUCTIONS

1

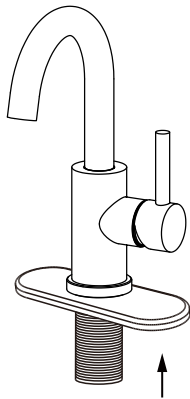


1. Run the deck plate through the water inlet hose and place it at the bottom of the faucet body.
Note: The deck plate installation is optional.

2

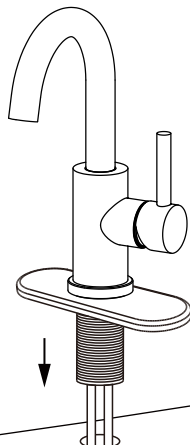


2. Pass the water inlet hose of the faucet through the sink hole and place the faucet standing on the sink.

3-4

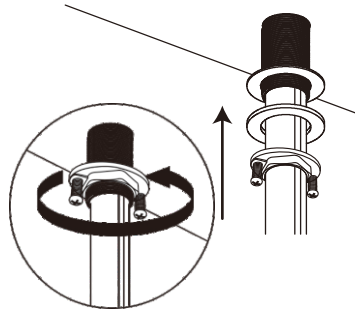


3. Put the rubber gasket into the fixed screw.
4. Put the steel gasket into the fixed screw.

5

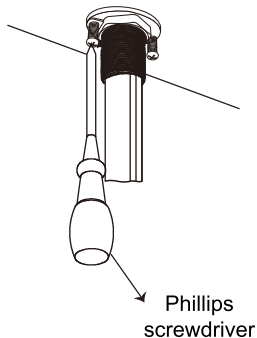


5. Screw the fixing nut to the fixed screw and tighten it with a screwdriver.

6-7

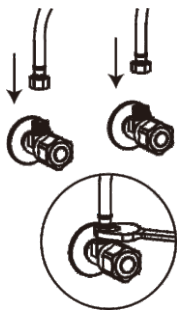

6. Notice: Open the water valve at this time, to drain out the sewage in the water pipe for 15 seconds and then close it.
7. Screw the water inlet hose nut onto the water valve and tighten it with a wrench. Finally, open the water valve and enjoy.

8

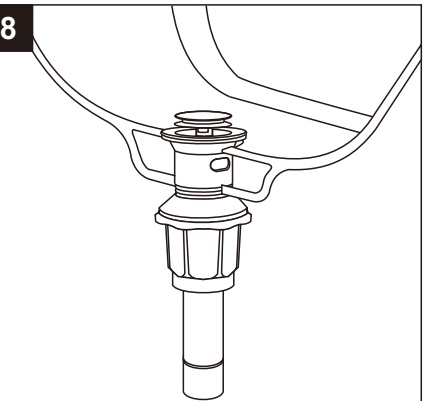

8. Install the pop-up drain assembly, making sure to tighten it securely.

Maintenance Tips:

- Operate faucet gently to ensure long-lasting use.
- Dry the faucet surface with a clean cloth to maintain the finish.
- Clean with a damp sponge and avoid abrasive materials.
- Do not use acidic cleaners or anything that may scratch the finish.
- Run the faucet during freezing temperatures (< 0°C / 32°F) to prevent freezing.
- Shut off the water supply valve when not in use for a long time.