MAG STRIP

Installation Manual



An exciting new retrofit kit lighting solution from


TETAL LEDS


Installation Instructions

Installation must be carried out by a LICENSED electrician only! Disconnect power to fixture from breaker box before attempting to install.

1. Fix the (2) clips onto the ceiling with the MagStrip onto the 2 clips.


You may also lock the magnetic clips into supplied bolts and screws, then install the the back of the MagStrip lamp, and place between the existing fluorescent sockets.




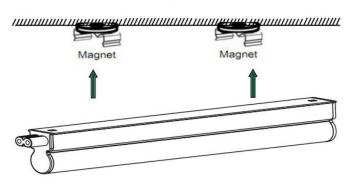


2. For linking two MagStrip fixtures with MagDual30 harness: disconnect hot and neutral from existing fluorescent and reconnect hot and neutral to quick connect on harness



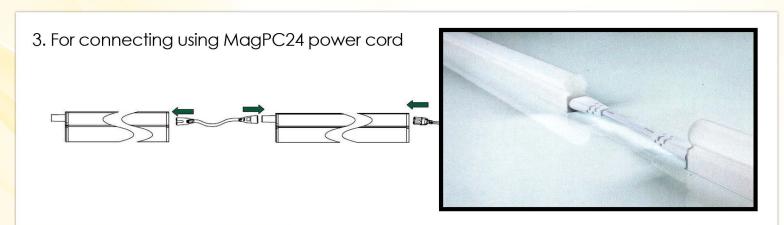

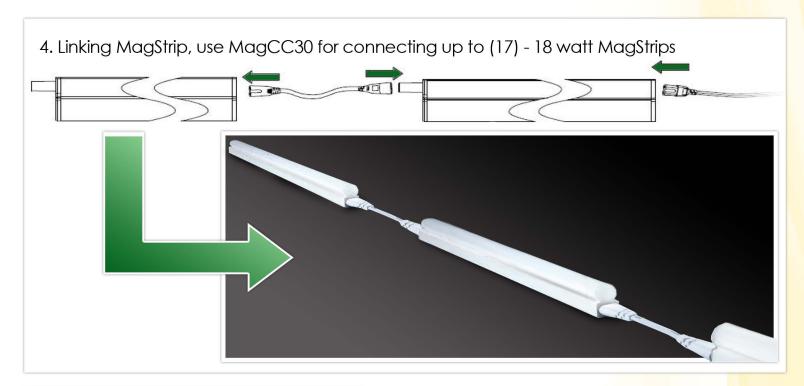

Accessories

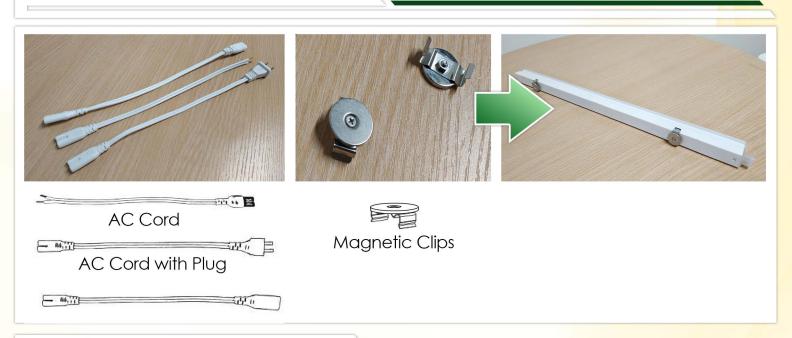

Operational Notes

- 1. Installation by a licensed electrician only. Disconnect power to fixture from breaker box before installing.
- 2. After unpacking, check if the products are in good condition. Any problem, contact your distributor.
- 3. Indoor dry location use only, IP20.
- 4. Switch off the power supply when installing.
- 5. Make sure the product works under specified voltage.
- 6. Recommended working temperature: -20-45 degrees celsius, for longevity.
- 7. Not for use with dimmer.