


- F-034-4TTC Finish(C) ☐
F-034-4TTGS Finish(GS) ☐

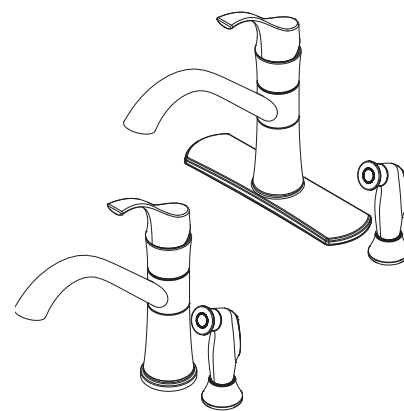

Specifications

Features

- 1.8 GPM Flow Rate
- 1,2,3 or 4-Hole Installation
- Flex-Line Supply Lines
- High Arc Spout
- Installs With or Without Side Spray
- 360° Swivel Spout
- TiteSeal™ Deck Plate
- Mounting Hardware Included
- Pfister Connect
- Quick Install Tool
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

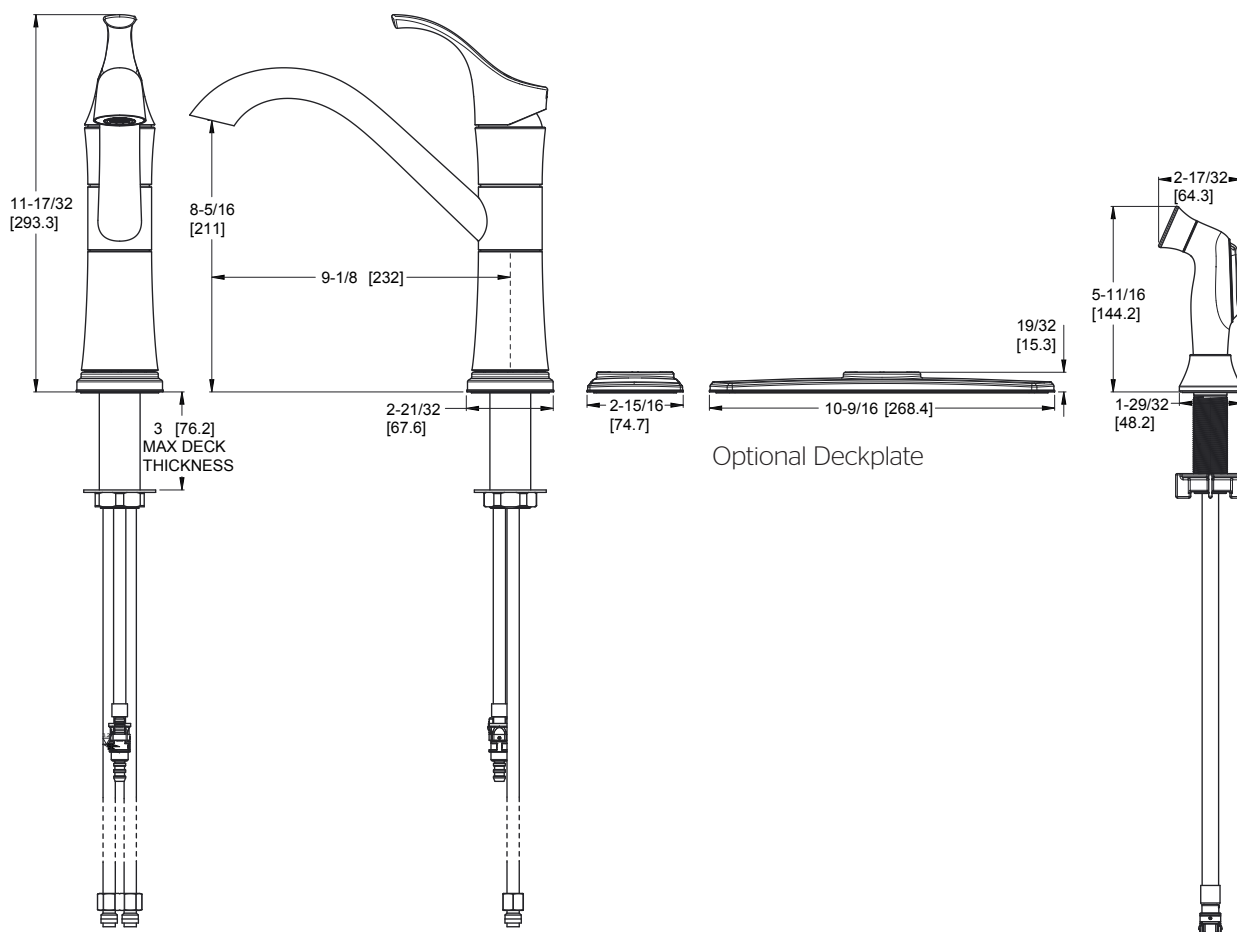

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Optional Side Spray