



# THERMOPLASTIC BASE NO-CALK® ROOF FLASHINGS TECHNICAL SPECIFICATION

Job Name	Item #
Location	
Engineer	Contractor
PO #	Tag
Representative	

## SPECIFICATIONS

Oatey Thermoplastic No-Calk® Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

## APPROVALS AND LISTINGS



IAPMO Listed



## DESCRIPTION

All dimensions in inches.

- Roof Flashing slides over vent pipe for pitch to 45°.
- Non-fading, non-cracking rigid black thermoplastic base.
- Non-fading sealing collar.
- Approved for Type B installations.
- Not for hot-mopped or built-up roofs.
- Do not use paint or petroleum based products on plastic bases or rubber collars.

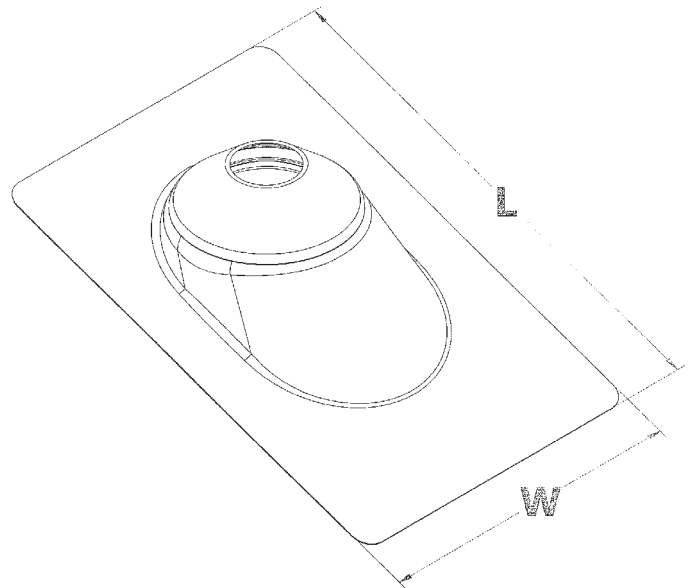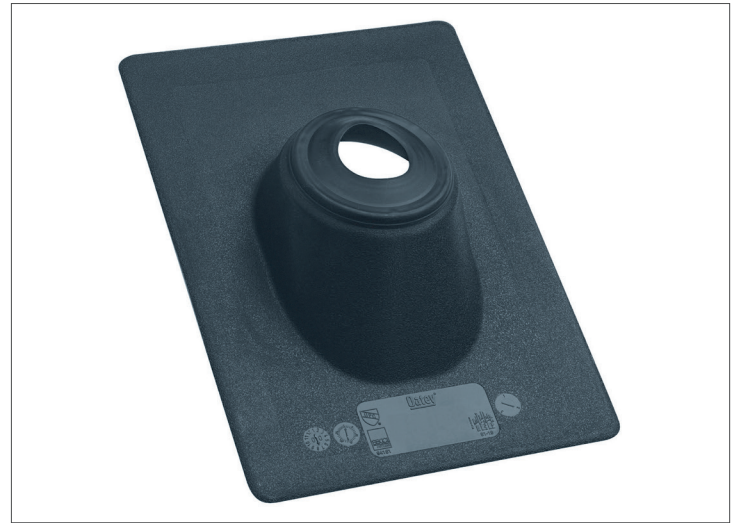

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)



**THERMOPLASTIC BASE  
NO-CALK® ROOF FLASHINGS  
TECHNICAL SPECIFICATION**

**PRODUCT SELECTOR**

THERMOPLASTIC BASE NO-CALK® ROOF FLASHINGS						
✓	Product Number	Description	Length (L)	Width (W)	Pack	Carton Weight
	11898	1-¼"-1-½" Thermoplastic No-Calk Roof Flashing	13	9-¼	6	3 lbs.
	11908	1-¼"-1-½" Thermoplastic No-Calk Roof Flashing	13	9-¼	12	6 lbs.
	11899	2" Thermoplastic No-Calk Roof Flashing	13	9-¼	6	3 lbs.
	11909	2" Thermoplastic No-Calk Roof Flashing	13	9-¼	12	6 lbs.
	11890	3" Thermoplastic No-Calk Roof Flashing	15	11-¼	6	4 lbs.
	11910	3" Thermoplastic No-Calk Roof Flashing	15	11-¼	12	8 lbs.
	11891	4" Thermoplastic No-Calk Roof Flashing	16	12	6	5 lbs.
	11911	4" Thermoplastic No-Calk Roof Flashing	16	12	12	9 lbs.
	11917	1-¼"-1-½" Thermoplastic No-Calk Roof Flashing – SW Texas	15	11-¼	12	9 lbs.
	11918	2" Thermoplastic No-Calk Roof Flashing – SW Texas	15	11-¼	12	9 lbs.
	11884	1.25" – 1.5" Thermoplastic No-Calk	12	18	12	9 lbs.
	11887	1-¼"-1-½" Large Base Thermoplastic No-Calk Roof Flashing	18	18	12	9 lbs.
	11888	2" Large Base Thermoplastic No-Calk Roof Flashing	18	18	12	10 lbs.
	11889	3" Large Base Thermoplastic No-Calk Roof Flashing	18	18	12	10 lbs.

Data is subject to manufacturing tolerances.