



# ANDUSTRIAL

**Address:**

101 Henry Adams Street, Suite 405,  
San Francisco, CA 94103

**Phone:**

(415) 495-2601  
9:00 AM To 5:00 PM PST  
(Monday To Friday)

**Email:**

[hello@andustrial.com](mailto:hello@andustrial.com)

**Website:**

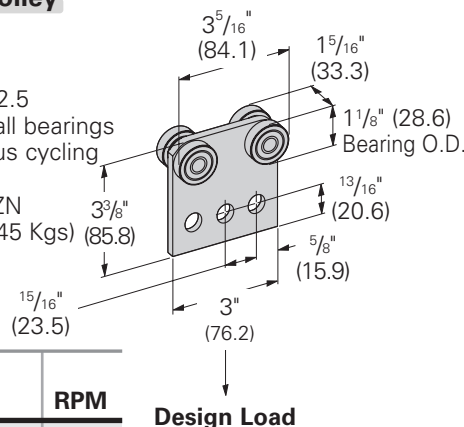
[www.andustrial.com](http://www.andustrial.com)



## ANDUSTRIAL

**Four Bearing Trolley Assembly****SKU: TWPS104**

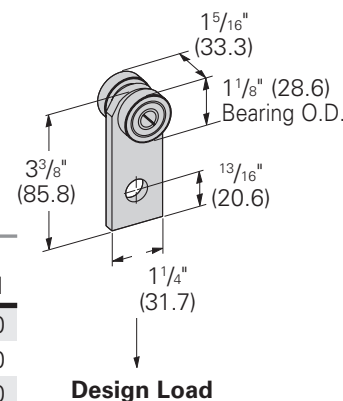
- Safety Factor of 2.5
- Stainless steel ball bearings
- Not for continuous cycling applications
- Standard finish: ZN
- Wt./Pc 1 Lbs. (0.45 Kgs) (85.8)



| Design Load |        |      |
|-------------|--------|------|
| Lbs.        | kN     | RPM  |
| 300         | (1.33) | @600 |
| 450         | (2.00) | @300 |
| 600         | (2.67) | @100 |

**Two Bearing Trolley Assembly****SKU: TWPS101**

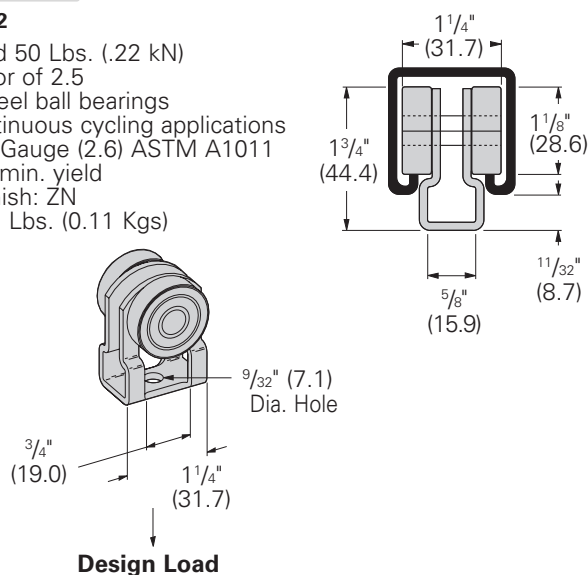
- Safety Factor of 2.5
- Stainless steel ball bearings
- Not for continuous cycling applications
- Standard finish: ZN
- Wt./Pc 0.5 Lbs. (0.22 Kgs)



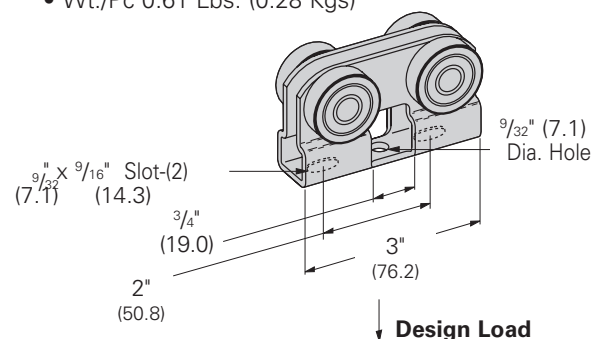
| Design Load |        |      |
|-------------|--------|------|
| Lbs.        | kN     | RPM  |
| 150         | (.67)  | @600 |
| 225         | (1.00) | @300 |
| 437         | (1.94) | @100 |

**Two Bearing Light Duty Trolley Assembly****SKU: TWPS102**

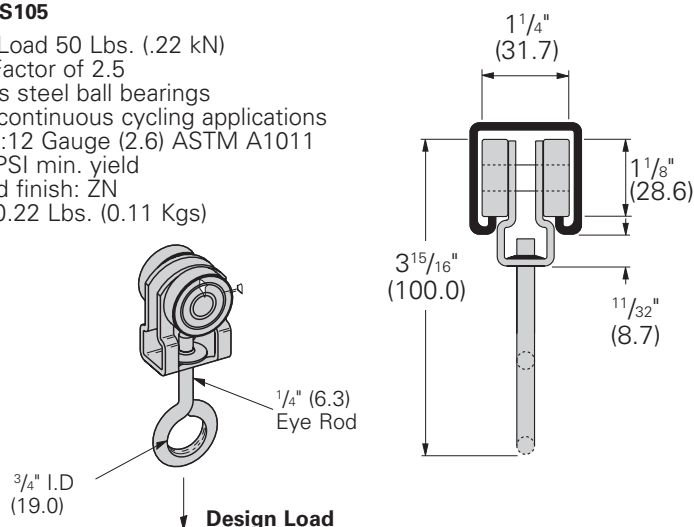
- Design Load 50 Lbs. (.22 kN)
- Safety Factor of 2.5
- Stainless steel ball bearings
- Not for continuous cycling applications
- Material: 12 Gauge (2.6) ASTM A1011 33,000 PSI min. yield
- Standard finish: ZN
- Wt./Pc 0.22 Lbs. (0.11 Kgs)

**Four Bearing Light Duty Trolley Assembly****SKU: TWPS106**

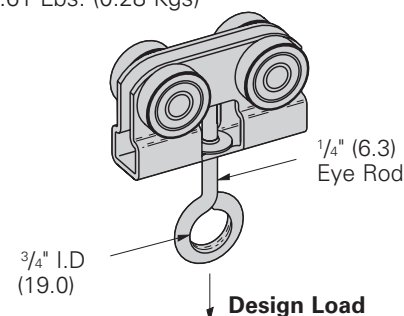
- Design Load 100 Lbs. (.44 kN)
- Safety Factor of 2.5
- Stainless steel ball bearings
- Not for continuous cycling applications
- Material: 12 Gauge (2.6) ASTM A1011 33,000 PSI min. yield
- Standard finish: ZN
- Wt./Pc 0.61 Lbs. (0.28 Kgs)

**Two Bearing Light Duty Trolley Assembly with Eye Hook****SKU: TWPS105**

- Design Load 50 Lbs. (.22 kN)
- Safety Factor of 2.5
- Stainless steel ball bearings
- Not for continuous cycling applications
- Material: 12 Gauge (2.6) ASTM A1011 33,000 PSI min. yield
- Standard finish: ZN
- Wt./Pc 0.22 Lbs. (0.11 Kgs)

**Four Bearing Light Duty Trolley Assembly with Eye Hook****SKU: TWPS103**

- Design Load 100 Lbs. (.44 kN)
- Safety Factor of 2.5
- Stainless steel ball bearings
- Not for continuous cycling applications
- Material: 12 Gauge (2.6) ASTM A1011 33,000 PSI min. yield
- Standard finish: ZN
- Wt./Pc 0.61 Lbs. (0.28 Kgs)

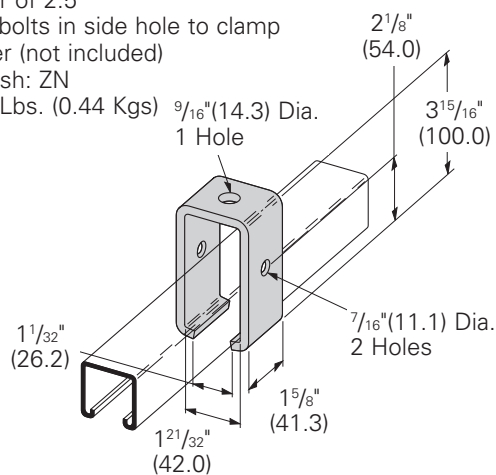




## ANDUSTRIAL

**Trolley Beam Support****SKU: TBPS100**

- Design Load 1200 Lbs. (5.34 kN)
- Safety Factor of 2.5
- Use  $\frac{3}{8}$ " x 3" bolts in side hole to clamp strut together (not included)
- Standard finish: ZN
- Wt./Pc 0.97 Lbs. (0.44 Kgs)

**Trolley Beam Joint Support****SKU: TBPS105**

- Design Load 1200 Lbs. (5.34 kN)
- Use  $\frac{3}{8}$ " x 3" bolts in side hole to clamp strut together (not included)
- Standard finish: ZN
- Wt./Pc 2.09 Lbs. (0.95 Kgs)

