HISENSE REFRIGERATOR

RF270P5ASEH

PureFlat Series

Counter Depth-Ultra French Door Refrigerator

KEY FEATURES

- Installed Ice Maker in Freezer
- Internal Water Dispenser
- Smart Connectivity
- FlushMetal Recessed Handle
- Flexible Sliding Shelf
- ENERGY STAR® Certified

AVAILABLE COLORS

Fingerprint-Resistant Stainless Steel



TECHNICAL SPECIFICATIONS


PERFORMANCE	
Refrigerator (cu. ft.)	17.9
Freezer (cu. ft.)	8.7
Total Capacity (cu. ft.)	26.6
ENERGY STAR® Certified	Yes
Energy Consumption (kWh/Year)	633
Safety Listing	UL Safety Listing
ICE & WATER SYSTEM	
Ice and Water Dispenser Type	Both
Ice / Water Location	Internal Water Dispenser
Ice Maker	Single in Freezer
Ice Type	Cubed
Daily Ice Production	4.4 lbs
Ice Storage Capacity	7.7 lbs
Removable Ice Bin	Yes
Water Filtration	Yes
Filter Model	HX2019F-A
Water Inlet Pressure	207~700kPa
COOLING SYSTEM	
Temperature Sensors	2
Compressor Type	Durable Inverter
Refrigerant (Type and Volume)	R600a/2.54oz(72g)
Multi Air Flow Cooling	Yes
Evaporator	1
CONVENIENCE	
Display Type	Internal/ Smooth Touch / White LED
Temperature Controls	Electronic/ Digital
Door Alarm	Yes
Smart Connectivity	Yes (ConnectLife)
Auto Closing Door Hinge	Yes
Leveling Legs	Yes
Demo Mode	Yes
Gallon Door Storage	Yes
Noise Level (dB)	43


REFRIGERATOR	
Temperature Range (°F)	34°F~44°F
Door Type	Side Swing
No. of Shelves	4 Split (4 Fixed)
Cantilevered Shelves	Yes
Sliding Shelf	Yes
Shelf Construction	Tempered Glass
Shelf Trim	Grey Décor
No. of Crisper Drawers	2
LED Lighting	Yes (Ceiling LED)
No. of Door Bins	6
Door Bin Construction	1 Piece (Clear)
FREEZER	
Temperature Range (°F)	-11°F~7°F
Door Type	Pull-Out Drawer
Drawers	2-Tier Organization
Drawer Divider	Yes
LED Lighting	Yes (Ceiling LED)
MATERIALS AND FINISHES	
Fingerprint-Resistant Door	Yes
Door Style	Flat
Door Texture	Smooth
Available Door Colors	Stainless Steel
Handle Type	Integrated
Hidden Hinges	Yes
Toe Grille	No
Cabinet Color	Grey
Inner Liner Color	White

INSTALATION DIMENSION	
Product (W x H x D)	36.0*70.3*29.9"
Width (Excluding Door)	35.8"
Width (Including Door)	36.0"
Common Width	36.0"
Width (Door Open 90° Excluding Handle)	39.2"
Width (Door Open 90° Including Handle)	39.2"
Width (Door Fully Open Excluding Handle)	56.9"
Depth (Excluding Handles)	29.9"
Depth (Including Handles)	29.9"
Depth (Less Door)	25.6"
Depth (to Hinge Cover)	18.1"
Depth (Door Open 90°)	46.5"
Depth Type	Counter Depth
Height (to Top of Hinge)	70.3"
Height (to Top of Door)	70.3"
Height (to Top of Case)	70.0"
Installation Clearance	Sides 1/2", Top 1/2", Back 2"
Carton (W x H x D)	37.7*72.7*32.2"
Weight (Unit/ Carton)	239lbs./ 270lbs.
INSTLIMITED WARRANTY	
Warranty	2-Year limited
Parts & Labor	2 Years
Sealed System (Parts)	5 Years
Accessories	90 Days for Parts
UPC CODES	
RF270P5ASEH (Counter-Depth Ultra)	850084215223

©2026 Hisense USA. All rights reserved. All product specifications, and data are subject to change without notice to improve reliability. function. design orotherwise.
Hisense USA Corporation 5995 Windward Pkwy, Alpharetta, GA 30005 1-877-465-3566 www.hisense-usa.com


HISENSE REFRIGERATOR

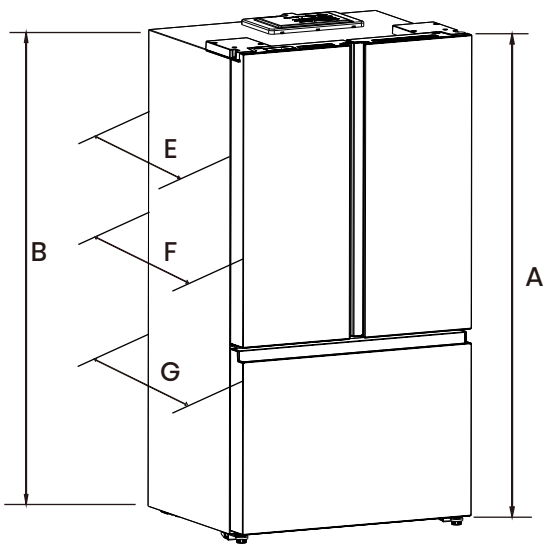

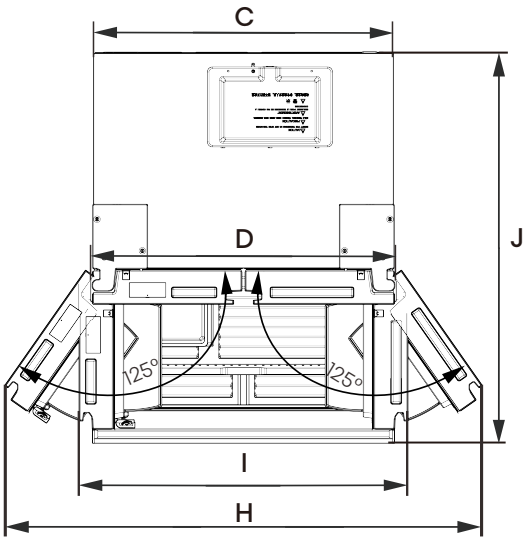

Model	Capacity	Height-Overall"A"	Height-Top of Case "B"	Width-with Case "C"	Width-with Door "D"	Depth-with Case "E"	Depth-with Door "F"	Depth-with Handle "G"	Width-Doors Open 125° "H"	Width-Doors Open 90° "I"	Depth-Doors Open 90° "J"
RF270P5ASEH	26.6 cu.ft	70.3" (1785mm)	70.0" (1778mm)	35.75" (908mm)	36.0" (914mm)	25.6" (650mm)	29.9" (760mm)	29.9" (760mm)	56.9" (1444mm)	39.2" (996mm)	46.5" (1180mm)

LOCATION REQUIREMENTS

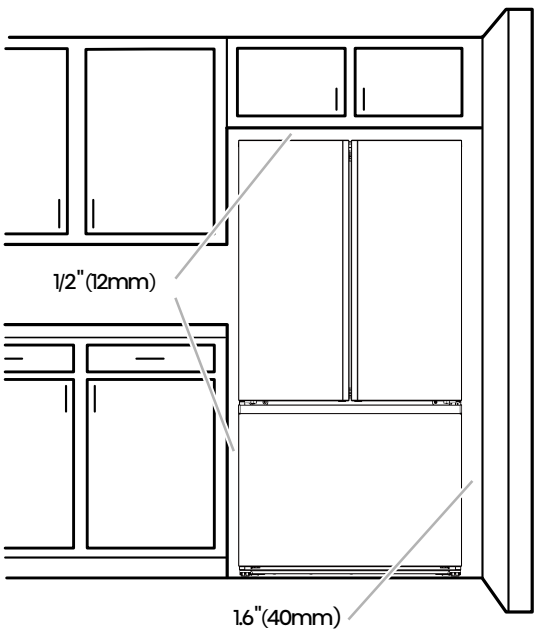

To ensure proper ventilation for your refrigerator, allow for a 1/2"(12mm) space on each side and at the top.
Allow at least 2.0"(51mm) between back of cabinet and the wall.
If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 1.6"(40mm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55F(13°C) to a maximum of 110°F(43°C).

©2026 Hisense USA. All rights reserved. All product specifications, and data are subject to change without notice to improve reliability. function. design orotherwise.
Hisense USA Corporation 5995 Windward Pkwy, Alpharetta, GA 30005 1-877-465-3566 www.hisense-usa.com