

# Assembly Instructions



## ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

EASY  DIFFICULT

## Tools Required for Assembly:


Allen Wrench



# ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.


## BASIC ASSEMBLY TECHNIQUES

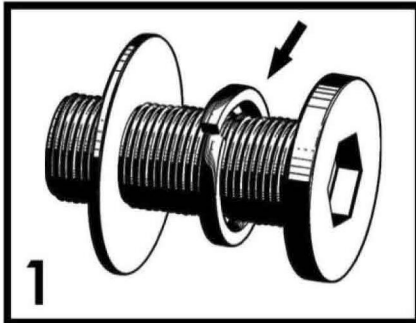


When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.




Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.

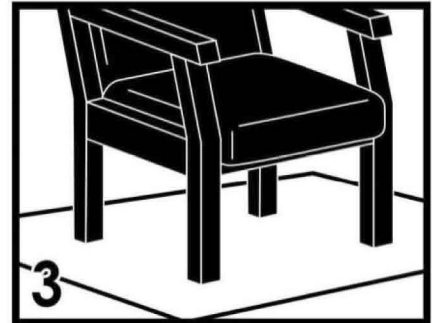


Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

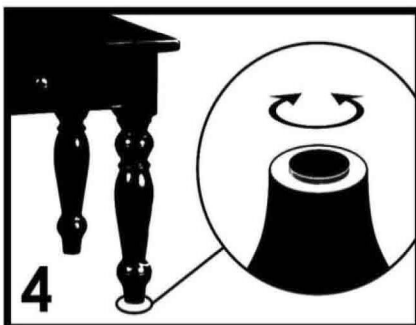

Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

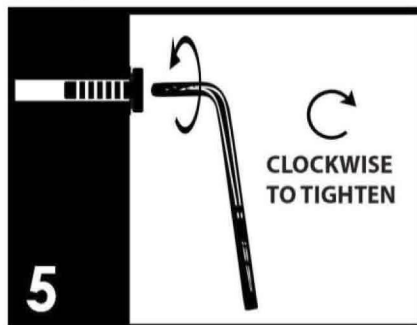

Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

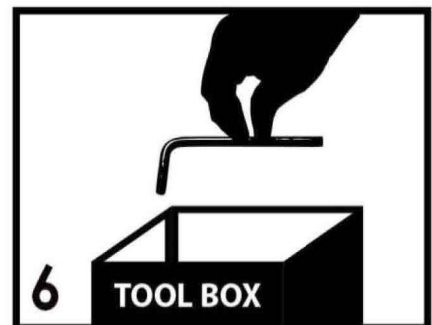

Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.



FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.




Before you begin, please read Page 3 of "Assembly and Care Advice".


And remember, do not tighten until each step is completed or instructed.

MD

## Parts List



**#1 x 2pcs**  
Leg



**#6 x 1pc**  
Left Support




**#2 x 1pc**  
Left Lifting support



**#7 x 1pc**  
Button with line



**#3 x 1pc**  
Right Lifting Support



**#8 x 1pc**  
Table Top



**#4 x 1pc**  
Middle Support Plate



**#9 x 1pc**  
Right Support



**#5 x 2pcs**  
Support



**#10 x 1pc**  
Table Cap



# Hardware List



#A x 2pcs  
Leg Pad



#F x 1pc  
Allen Wrench 6MM




#B x 18pcs  
Screw M6X12




#G x 1pc  
Wrench



#C x 8sets  
Screw&Washer M6x25



#H x 1pc  
Allen Wrench 5MM



#D x 4sets  
Screw&Gasket M8x10



#I x 3pcs  
Plastic Circle





#E x 3pcs  
Screw M6x15




#J x 3pcs  
Nail  $\phi$  4X16



Attach leg pad (#A) to each legs (#1).


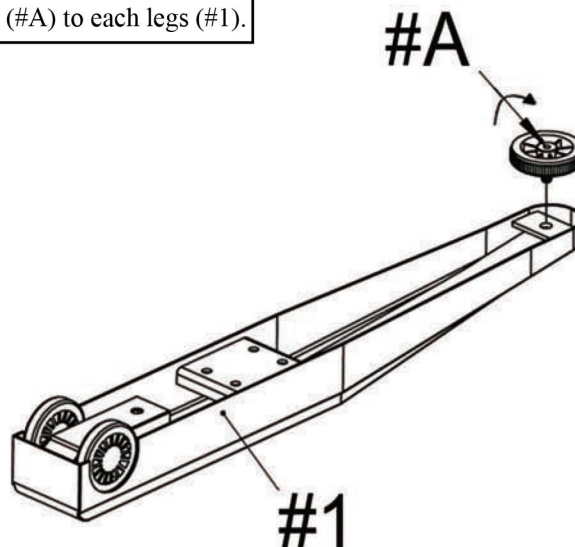


x 2



#2

Align a leg (#1) to the holes of the left lifting support (#2) and right lifting support (#3).  
Secure with bolts (#C).

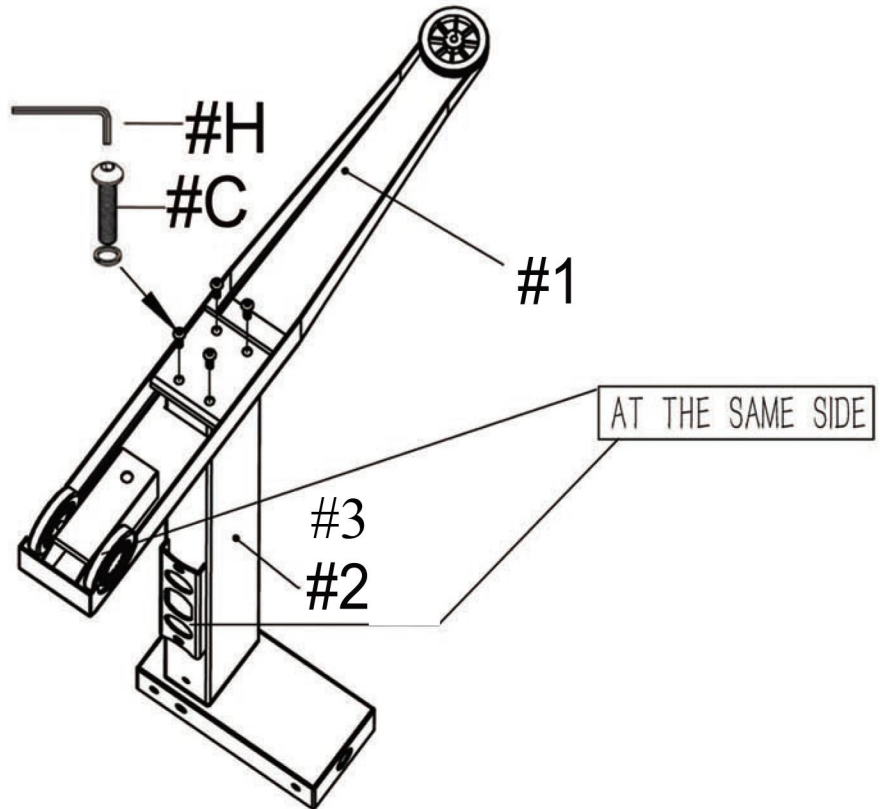


x 2





#3

Align middle support plate (#4) to the holes of the left (#2) and right (#3) lifting supports.  
Secure with bolts (#D), but do not fully tighten.

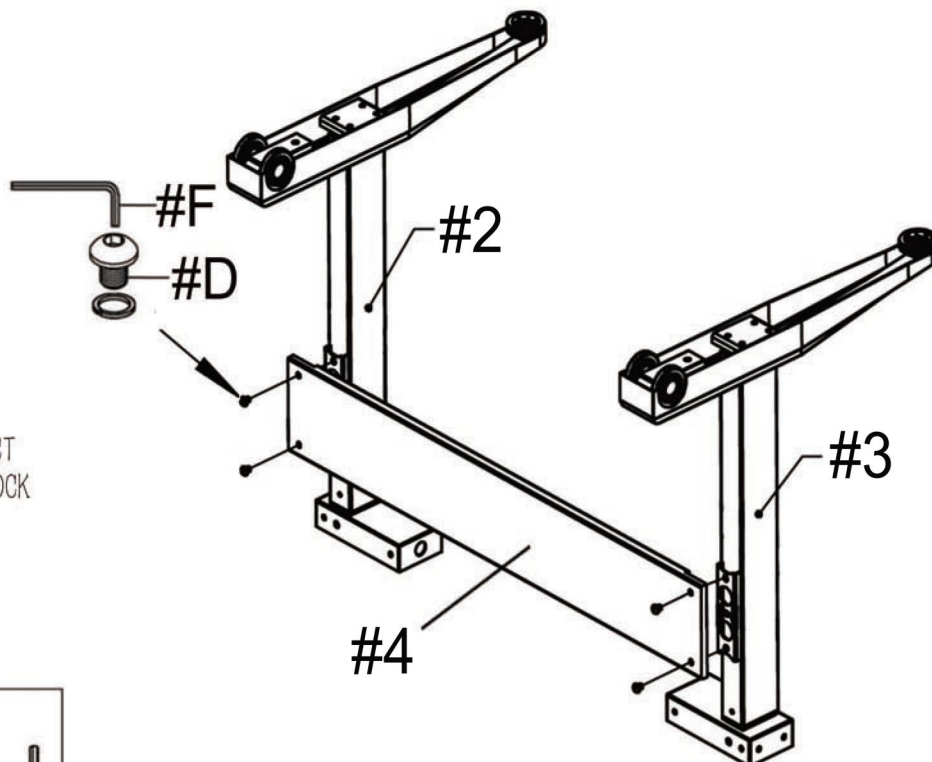




ATTENTION.  
JUST TO CONNECT  
D AND DON'T LOCK







Align supports (#5) to the holes of the lifting supports (#2,3). Secure with bolts (#B), then fully tighten bolts (#D) from steps (#3).

ATTENTION:  
LOCK B FIRST AND  
THEN LOCK D

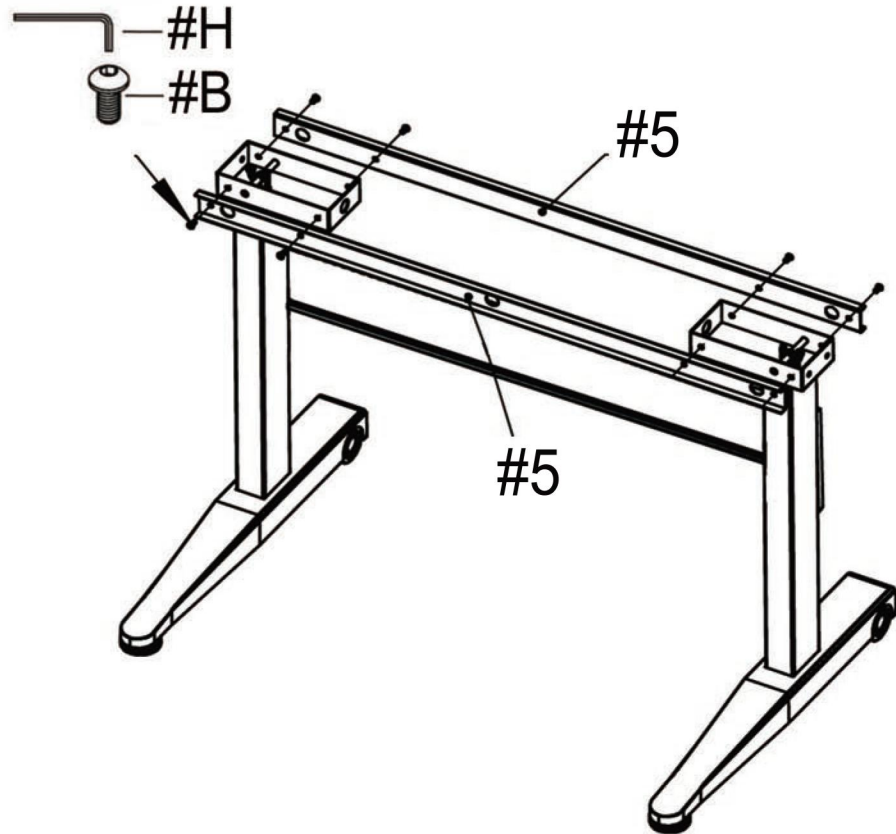


Align left support (#6) to the holes of the left lifting support (#2). Secure with bolts (#B).  
Align right support (#9) to the holes of the right lifting support (#3). Secure with bolts (#B).

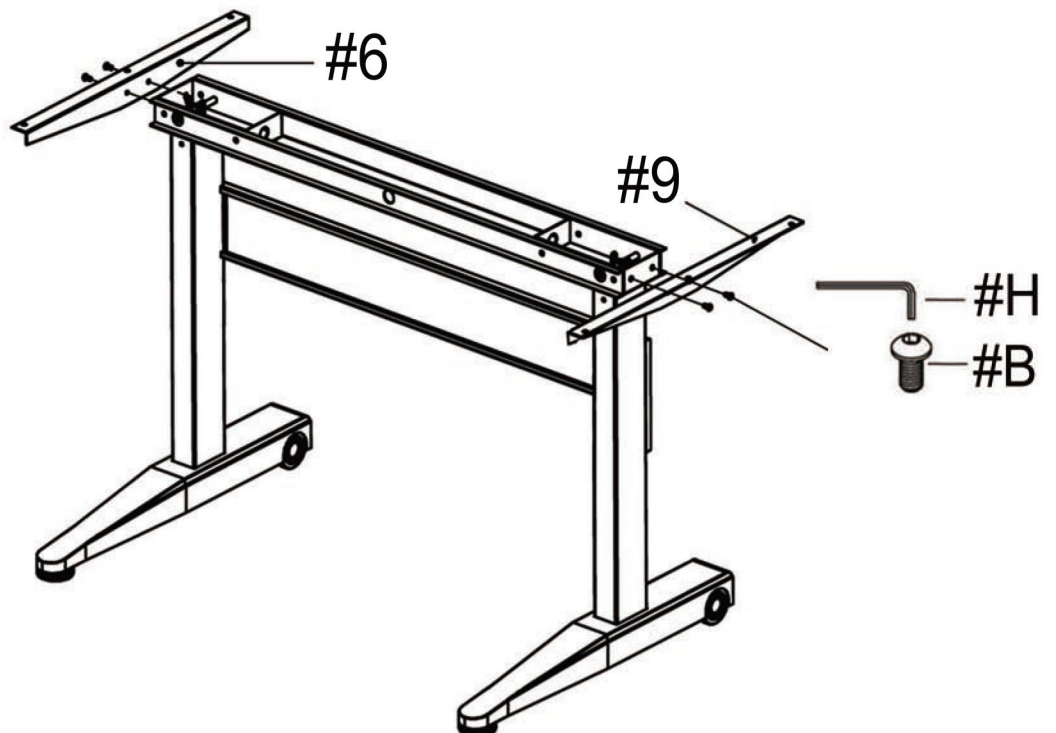








Extend button with line through the center hole of support (#5). Extend the line (#7) to each side of the lifting supports (#2,3). Make sure the line hooks on and attaches to the holding device. Secure hexagon with wrench.


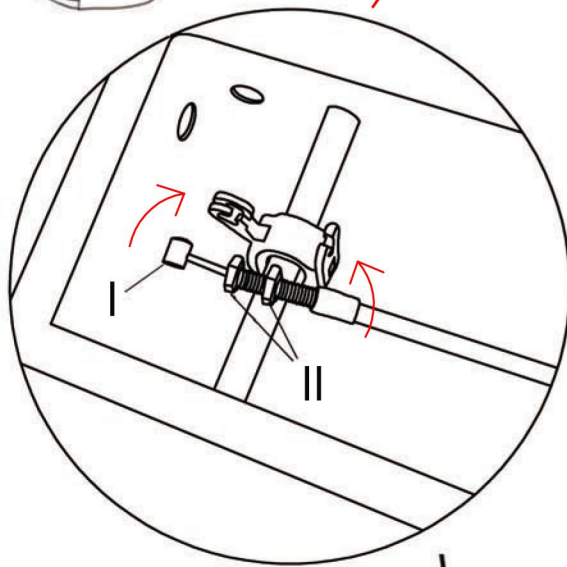


ATTENTION:  
ASSEMBLY I FIRST,  
THEN LOCK II

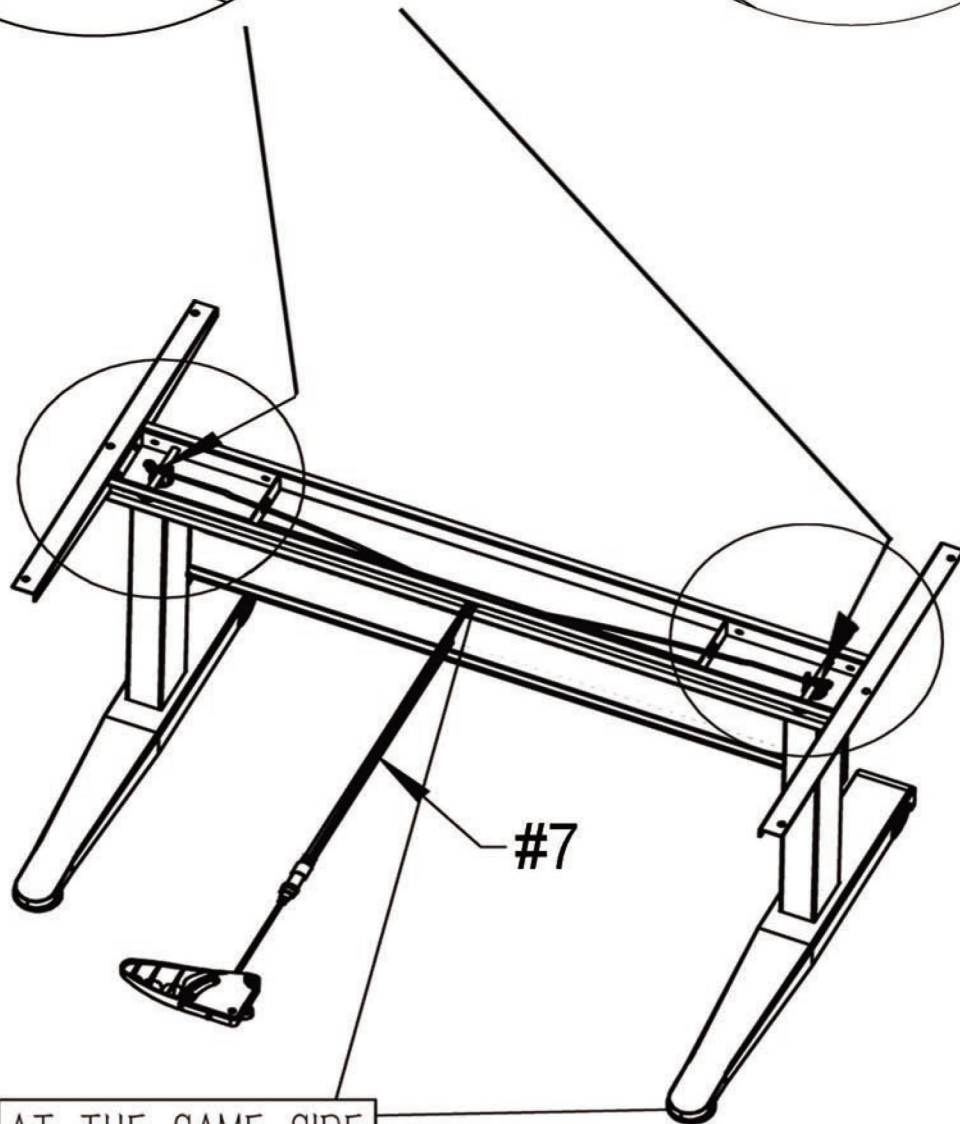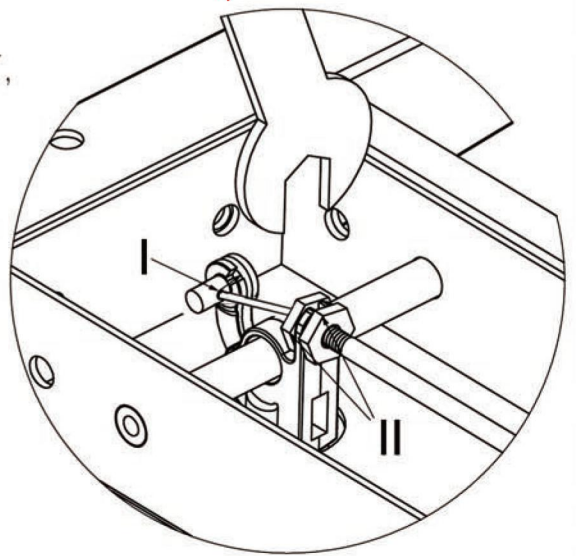


AT THE SAME SIDE



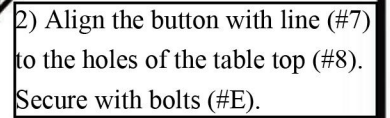

A line drawing of a mechanical testing apparatus. It features a central horizontal beam supported by two vertical columns. The columns are connected to a base with four wheels. A curved arm is attached to the top of the beam, and a cable is connected to it. Labels #J and #I point to specific components on the cable.




3PCS


Φ 4X16

3PCS






Place table cap (#10).

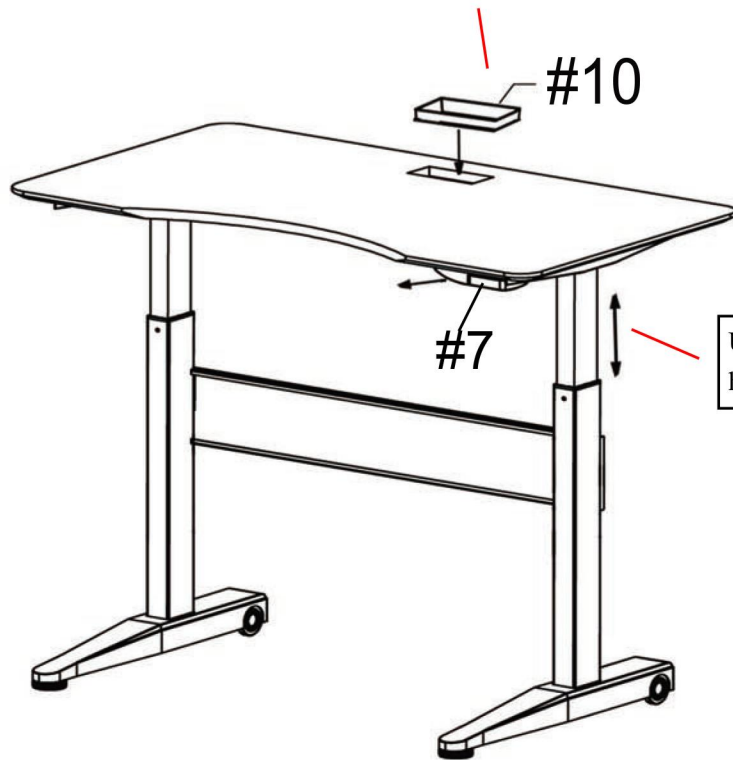

Use button (#7) to adjust height of table.



ASSEMBLY IS COMPLETED