

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

#### **DESCRIPTION**

- Metal construction with various finishes identified by suffix
- Single function handshower with double check valves

#### **OPERATION**

- Lever style handles
- Rotate hot side handle counterclockwise to open (clockwise to close)
- Rotate cold side handle clockwise to open (counterclockwise to close)

#### **FLOW**

• EP suffix models are limited to 2.0 gpm (7.6 L/min) max for products manufactured prior to June 30, 2018. EP suffix models manufactured after June 30, 2018 are limited to 1.75 gpm (6.7 L/min) max.


#### **STANDARDS**

- Third party certified to WaterSense®, ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA **(**) for lever handles

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

## **Specifications**




# EVA™ Two-Handle Roman Tub Faucet Trim with Built In Diverter Valve

Models: T944 series

Valves: 9792, 9793, 9796, 9797



Handshower 3668EP

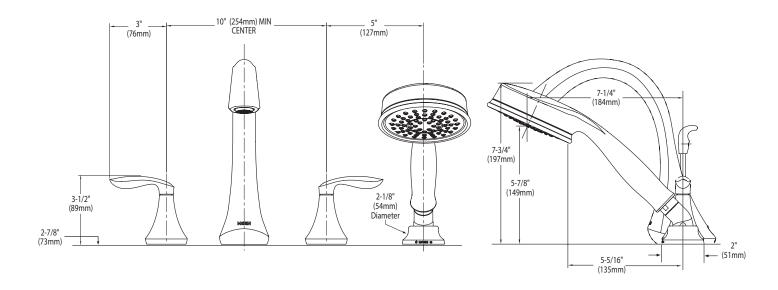

#### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



# DESCRIPTION

- · Metal construction with various finishes identified by suffix
- Single function handshower with double check valves

#### **OPERATION**

- Lever style handles
- Rotate hot side handle counterclockwise to open (clockwise to close)
- Rotate cold side handle clockwise to open (counterclockwise to close)

#### **FLOW**

• Hand shower meets 1.75 gpm (6.6 L/min) max.


#### **STANDARDS**

- Third party certified to WaterSense®, ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA for lever handles

#### **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

## **Specifications**




**EVA™**Two-Handle Roman Tub Faucet Trim
w/Built In Diverter Valve

Models: T944 series

Valves: 9792, 9793, 9796, 9797



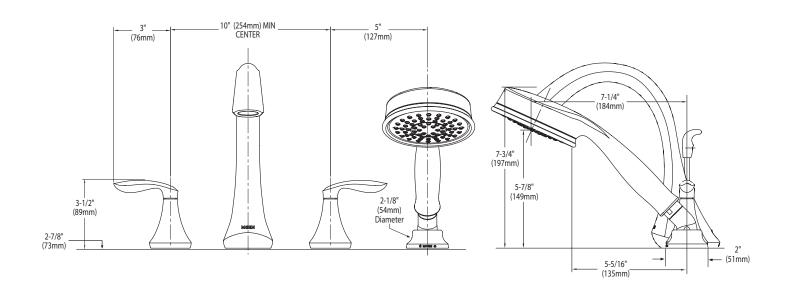

#### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



Buy it for looks. Buy it for life.®

#### **DESCRIPTION**

- Metal construction
- Installs on 10"(254mm) centers minimum
- Designed to be installed on finished decks up to 2-5/8" (67mm)
- 24" quick connect hoses
- Integral 1/2" PEX connections
- Includes (2) 1/2" CPVC adapters
- Includes test plug
- 140715 kit available separately to connect to 1/2" cold expansion PEX

#### **OPERATION**

- Can be installed with any Moen deck mounted roman tub trim kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

#### **FLOW**

Designed to deliver 13 gpm at 45 psi. (49L/min)

#### **CARTRIDGE**

Nonmetallic and stainless steel materials

#### **STANDARDS**


- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1, ASTM F1807, CSA B137.5 for PEX, ASTM D2846, CSA B137.6 for CPVC and all applicable requirements referenced therein
- 1/2" PEX fittings compatible with PEX tubing manufactured to ASTM F877
- 1/2" CPVC fittings manufactured to ASTM D2846

#### **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

**NOTE:** Plumbing codes require this product to be used with a device conforming to ASSE.


# Specifications



**Model:** 9793

#### Moen® Roman Tub High Flow Rough-In Valve Adjustable Type

104465 Thermostatic mixing valve sold separately is certified to ASSE 1070 and CSA B-125.3

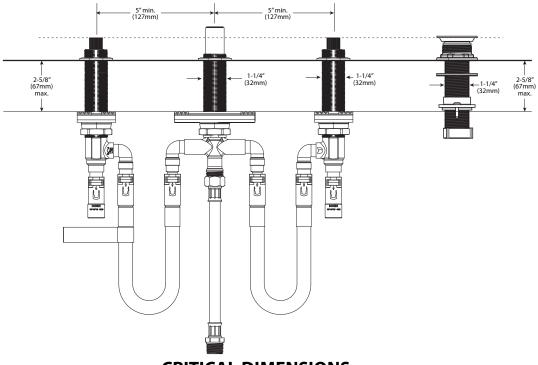

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com