





by Hukoro

## TOOLS REQUIRED



If you need further assistance, please contact us by Email: [customersupport@superiordecorinc.com](mailto:customersupport@superiordecorinc.com)

**\* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


## ASSEMBLY INSTRUCTIONS



### CAUTION

- Inspect the wire insulation for any cuts, abrasions or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

## HARDWARE INCLUDED



Fixture



Finial  
(hex nut, washer)




Cover



Rubber  
Rings



Ball Nuts



Mounting Unit




Mounting  
Screws



Wire Nuts


## EXPLODED PARTS

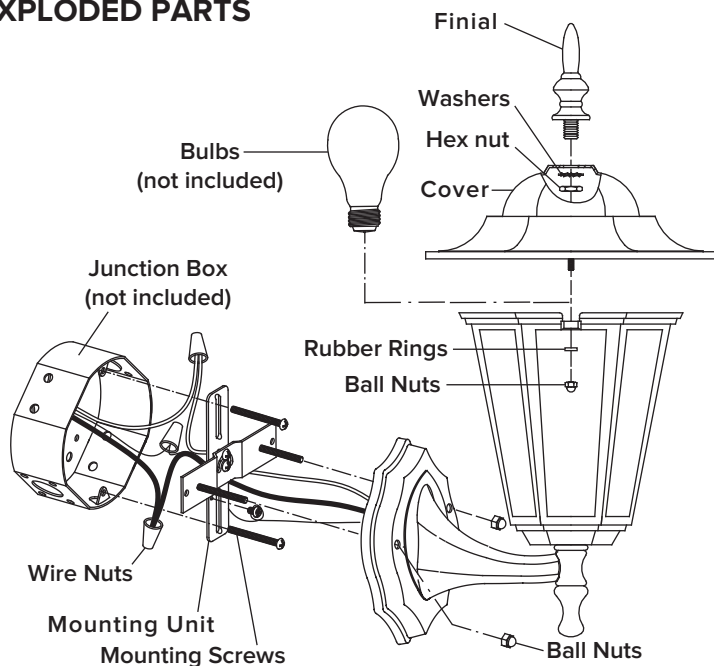

## INSTALLATION



### STEP 1

Unscrew the **ball nuts** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

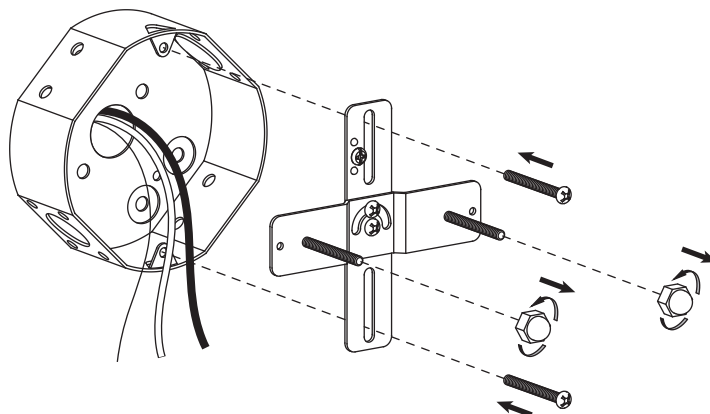

### STEP 2


Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape.

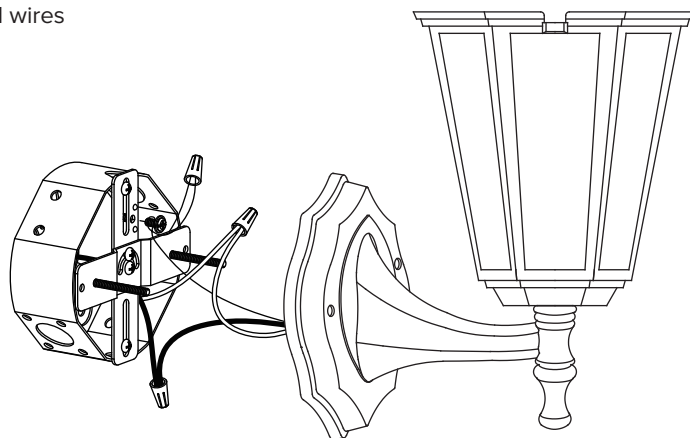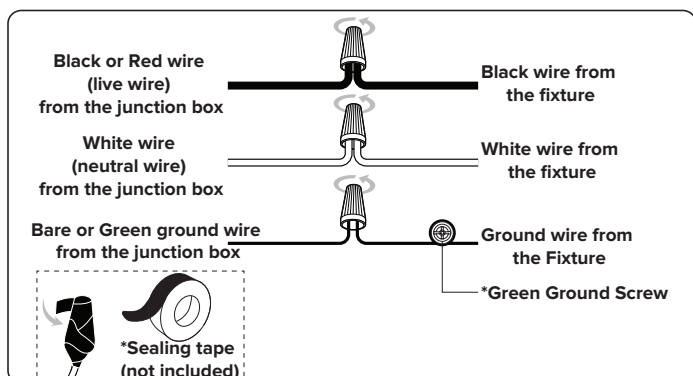

**STEP 3**



Attach the **fixture** to the **mounting unit** through **screw holes** as shown, and secure it with **ball nuts**.

NOTICE: Please use caulk in the back plate and wall mounting surface to prevent water from entering.

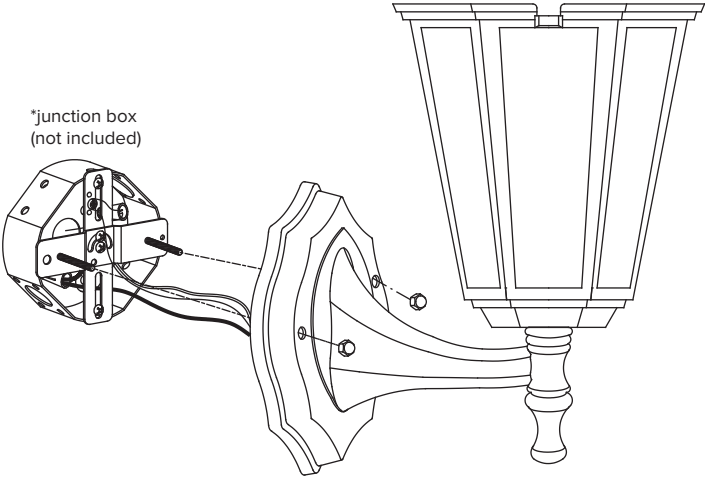


**STEP 4**

Install bulb (not included)

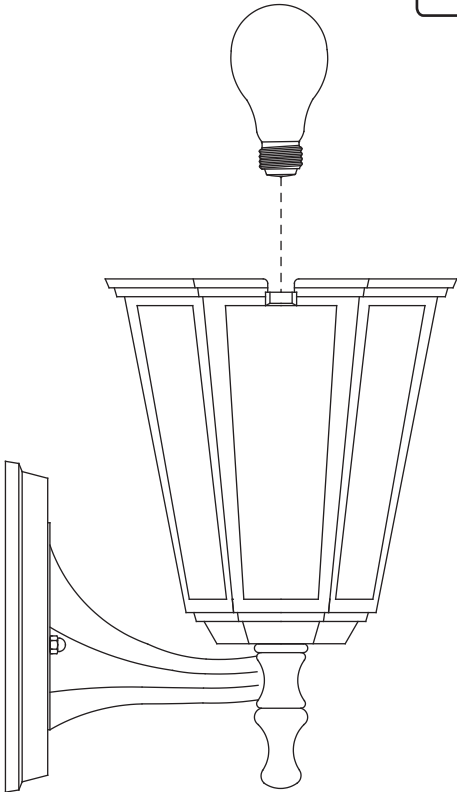

**STEP 5**

- 1. Remove the hex nut and washer from the **finial**.
- 2. Use the hex nut and washer to attach the **finial** to the **cover**.

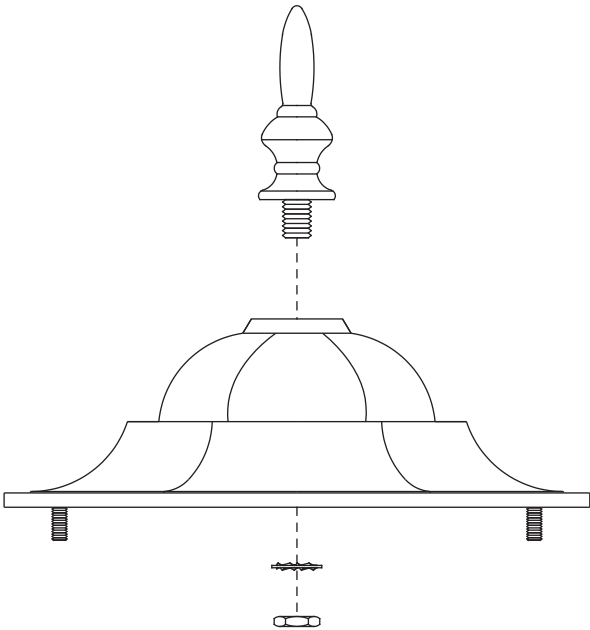

**STEP 6**

Attach the **cover** onto **fixture** using **rubber rings** and **ball nuts**.

