

Instruction Manual Basin faucet&Bathtub faucet System


CONTENT

1:Installation Condition ·····	1page
2:Basin Faucet Standard Part List	2page
3:Basin Faucet Installation Step 1	3page
4:Basin Faucet Installation Step 2 ······	4page
5:Bathtub Faucet Standard Part List	5page
6:Bathtub Faucet Installation Step 1·····	6page
7:Bathtub Faucet Installation Step 2	7page
8:Basin Faucet & Bathtub Faucet Application Instruction	8page
9:Care and Maintenance	9page

Installation Condition





- 1.Refer to the 《Standard Part List》 when unpacking, check all parts available.
- 2.Do not disassemble mixer body by yourself.
- 3. Connect inlet hoses to supply valves.
- 4.Make sure inlet pipes and supply valves have been installed and cleaned, also ensure no impurities in pipeline.




- 5. After installation, check all joints for leakages.
- 6. Suggest don't fit the faucet in the severely corrosive environments.

Basin Faucet Standard Part List



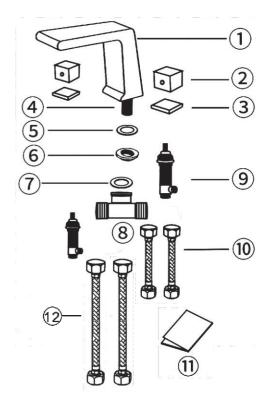


Hose Connection Travel

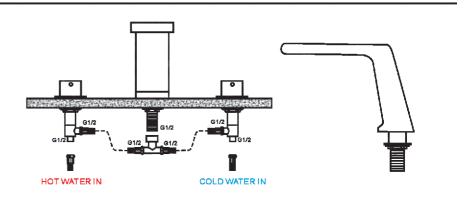


Basin FaucetInstallation Step 1


Connect Brass Part ④ with Faucet Body ① and put the Brass Part ④ through the basin hole. Install Faucet Body Gasket⑤ and Mounting Nut ⑥ in sequence and tighten the nut with a wrench. Then put Tee Gasket ⑦ into Tee ⑧ and connect Tee ⑧ to Brass Part ④.

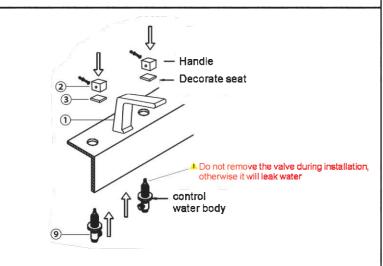

Remove the Decorate Seats ③ and put them on the basin holes. Connect the Control Water Bodies ⑨ with Decorate Seats ③ from the underside of the basin holes, and tighten them. Finally install the Handles ② and tighten them. (Not to disassemble the valve by yourself, otherwise leakage will occur.

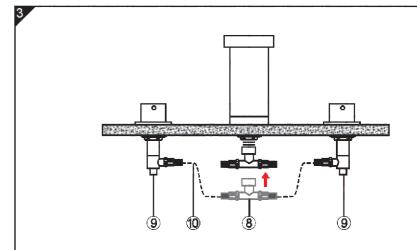


Connect one side of the Inlet Hoses ⁽¹⁾ to the Control Water Bodies ⁽²⁾, the other side to Tee ⁽³⁾, and tighten them. The red hose is for hot water and the blue hose is for cold water.

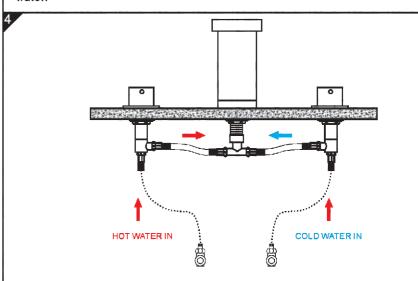


Separately connect another two inlet hoses(please buy them by yourself) to angle valves and control water bodies, left connect to the hot water, right connect to cold water.


Bathtub Faucet Standard Part List

NO Part Name Quantity 1 Faucet Body 2 Brass Part Faucet Body Gasket 1 3 4 Mounting Nut 5 Hand Shower 6 Hand Pedestal Pedestal Gasket 2 8 Mounting Nut 9 Handle 3 10 Decorate Seat 3 11 Transforms Control Valve Control Water Body 12 2 13 3 Hand Connect Hose 14 Shower Connect Hose 15 Shower Hose 16 Instruction Manual 17 Hot and Cold Hose

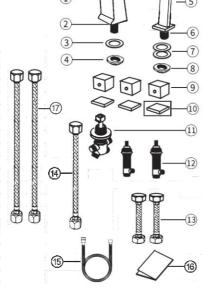


Hose Connection Travel

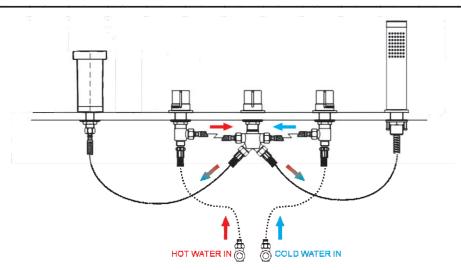

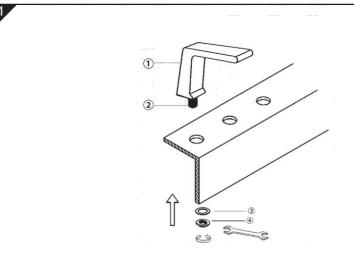


Connect Brass Part ② with Faucet Body ① and put the Brass Part ② through the basin hole. Install Faucet Body Gasket ③ and Mounting Nut ④ in sequence and tighten the nut with a wrench.

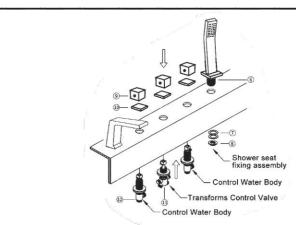


Remove the Decorate Seats ① and put them on the bathtub holes Connect Transforms Control Valve ① and Control Water Bodies ② with Decorate Seats ① from the underside of the bathtub holes, and tighten them. Then install the Handles ② and tighten them. Hand Pedestal ③ installation: Remove Pedestal Gaskets ⑦ and Mounting Nute ⑧. Connect them with Hand Pedestal ⑥ from the underside of the bathtub holes, and tighten Mounting Nut ⑧ with a wrench. (Not to disassemble the valve by yourself, otherwise leakage will occur. Left Control Water Body ② connects to the hot water, right connects to cold water.)

Bathtub Faucet Installation Step 2

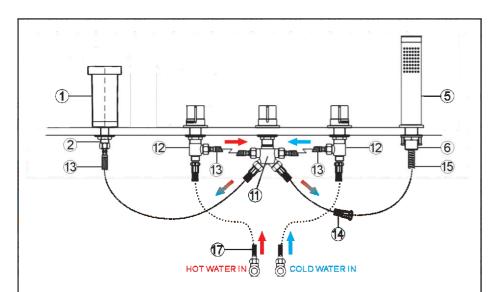



Install Hot and Cold Hoses (®) as the above drawings. Connect one side of Hot and Cold Hoses (®) with Transforms Control Valve (®), the other side to Control Water Bodies (®). Left is to hot water, right is to cold water. One side of Shower Hose (®) is connected to Hand Shower (®), the other side is connected to the Shower Connect Hose (®) through Hand Pedestal (®). Then the other side of Shower Connect Hose (®) is connected to Transforms Control Valve (®). Finally one side of Body Connect Hose (®) is connected with Brass Part (®), the other side is connected to Transforms Control Valve (®), and tighten them Separately connect another two inlet hoses (please buy them by yourself) to angle valves and Control Water Bodies (®).

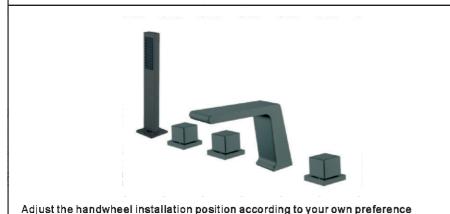

Basin Faucet Application Instruction


- 1:Operating handle gradually is better for valve protection
- 2:The handles turn right or left is to open or close. The larger the rotation angle, the larger the flow rate. Conversely, the smaller the rotation angle, the smaller the flow rate. Mixed warm water when the cold water handle and the hot water handle are opened at the same time.





Bathtub Faucet Application Instruction

- 1:The middle one of the Handles 9 is control water diversion of the Faucet Body 1 and Hand Shower 5.Turn left,water comes out from the Hand Shower 5;turn right,water comes out from the Faucet Body 1.
- 2:Operating handle gradually is better fo valve protection.
- 3:The handles 9 turn right or left is to open or close. The larger the rotation angle, the larger the flow rate. Conversely, the smaller the rotation angle, the smaller the flow rate. Mixed warm water when the cold water handle and the hot water handle are opened at the same time.
- 4:Turn on the water supply, check all connect points if leaking. If leaking, tighten it. Now the faucet is ready for using.



Care and Maintenance

In order to keep the mixer surface bright, please clean the mixer regularly.

Rinse faucet with clean water and wipe with soft cotton cloth.

Avoid suing cleaning powder, harsh cleaning chemicals, brushes, and cloth with coarse surface to prevent scratching and corrosion.

Do not use acid cleaner to clean the faucet as it may cause surface corrosion of the faucet. If the faucet comes into contact with harmful acid substances, please rinse it with water immediately.





If a large-scale clean-up is necessary, follow these procedures:

- 1:Use clean water and soft cloth to remove dirt on the surface as much as possible.
- 2:Use one of the following cleaners to remove dirt on the surface

Mild liquid cleaner.

Colorless glass cleaner, powder cleaner which does not have abrasive function and can be dissolved completely.

Polish liquid which does not abrasive function.

3:After cleaning, remove the cleansing agent with clean water completely and wipe with soft cotton cloth.

Website: www.casainc.com

Contact Phone Number: (303) 747-4321 Service Contact: service@casainc.com