



Flood Defender Icemaker Connector

Description:

10 Ft. Flood defender icemaker stainless steel connector. It is designed with a built-in auto-shut-off valve that activates when excess water flow is detected, protecting your floors and surrounding fixtures.

Construction:

304-Braided stainless steel construction for strength

Packaging:

Box

Code Approvals:




NSF/ANSI/CAN 61: Q ≤ 0.5
NSF/ANSI/CAN 372
CSA B125.5

Part#	Description	Inn/Mas
98554	10'	-/12

Rough in Drawing

All Dimensions Shown Are Nominal

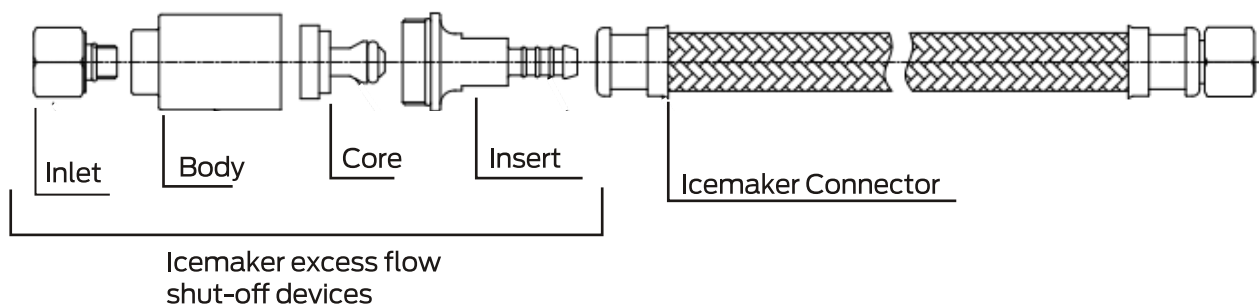

Working Pressure: 20 to 125 psi

Working Temp: 40°F~160°F

Minimum flow rate: 3.8 L/min (pressure 30±5PSI)

Shut-off flow rate: 4.5~7.6 L/min

For residential use only