



Intrepid® | K-R22880-G

Multifunction handshower, 1.75 gpm

Features

- Advanced spray engine provides five alternate experiences: full coverage, silk, massage, soft massage, and ribbon
- Full coverage spray produces an encompassing spray ideal for everyday use
- Silk spray: Soft, luxurious water drops rinse away stress
- Massage spray: Targeted, pulsing streams of water massage and ease muscles
- Soft Massage spray: Softer targeted, pulsing streams of water delicately massage muscles
- Ribbon spray: Relaxing, waterfall-like spray provides a soothing experience to wash away the day
- Massage spray offers twice the coverage (compared to average-size standard KOHLER® retail showerhead)
- One-click spray control lets you change sprays with the twist of a dial
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) flow rate.
- Can be used as a rainhead if paired with a ceiling-mount shower arm (sold separately)
- Box includes: Showerhead, sealant tape

DISCONTINUED



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 16:11 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 1.75 gpm (6.6 l/min)

Maximum Flow:

Handshower Rated Maximum 1.75 gpm (6.6 l/min)

Flow:

Material

- Premium material construction for durability and reliability
 - Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use
-

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 16:11 - US-CA

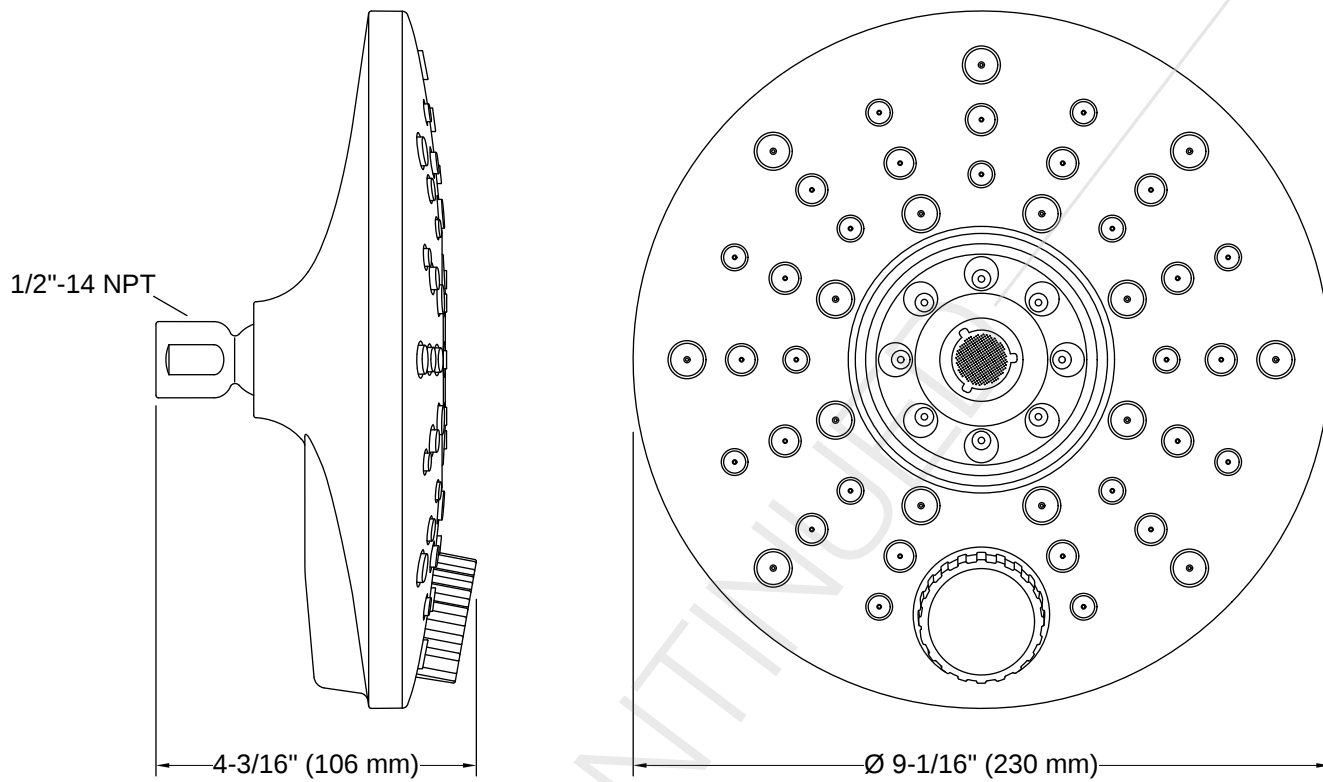

Installation

- 1/2" -14 NPT connection
- Shower arm and flange sold separately
- Wall- or ceiling-mount
- Required for installation: Sealant tape (included) and adjustable wrench

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.3 gal/min (4.9 l/min) or less.

