
Ladylux Pro

32 245 Main Sink Dual Spray Pull-Down



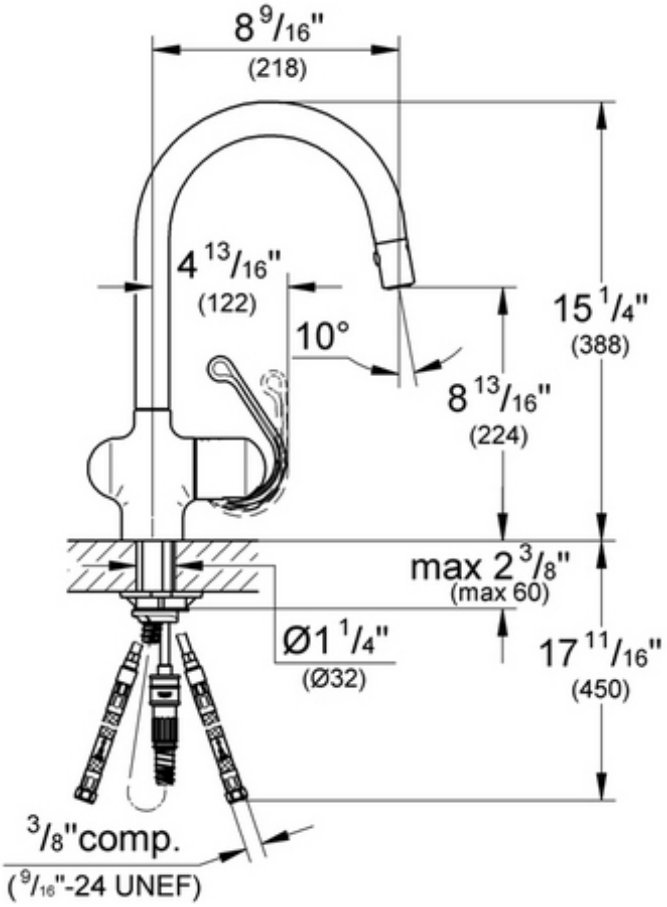

Description

GROHE RealSteel ® - stainless steel construction
GROHE SilkMove ® ceramic cartridge
SpeedClean® anti-lime system
Locking Push Button Control - to switch from regular flow to spray
Quick installation system
Single lever handle
Variable handle positioning
Stainless steel braided flexible supplies
56" extractable hose
8 9/16" spout reach
360º swivel spout

Note: Solid Stainlesss Steel Handle. Spray head in Stainlesss Steel InfinityFinish.

IAPMO file # 1750

Installation note: For full handle movement when mounted in front of a wall or backsplash, this faucet must be installed with no less than 3 1/4" of clearance between the faucet and backsplash or wall, unless the faucet is installed with the handle facing forward (handle oppposite the wall).

Flow Rate

2.2 gpm at 45 psi, 2.5 gpm at 80 psi (9.5 lpm)

Code Compliance

ASME/ANSI A112.18.1M
ANSI/NSF Standard 61
ADA Compliant

Available Finishes

SD0 Stainless Steel

GROHE America, Inc 241 Covington Drive, Bloomingdale, IL 60108 | 630-582-7711 | Fax: 630-582-7722
GROHE Canada, Inc | 1230 Lakeshore Road East, Mississauga, Ontario | Canada L5E 1E9 | 905.271.2929 | Fax: 905.271.9494