

CROSSOVER 2.0

STACKED DRYERS

Ships as two separate units. Must be stacked on site.



The power of true commercial

Strength, durability, and performance are at the core of this stacked dryer.

SMART DESIGN FOR A BETTER EXPERIENCE

- Extra Large Capacity for Families and Bulky Items
- Extra Large Door for Easy Loading
- 4 Dry Options: High, Medium, Low, and No Heat
- Fast Dry Times

Built with professional-grade components and technology for superior energy efficiency, reliability, and results.

SIGNATURE FEATURES • 2 X 22 LB CAPACITY

- 2 x 7.7 cu. ft. Drum
- Drum Supported by 5 Roller Bearings for Long Life
- Easy to Clean, Heavy-Duty Lint Screens
- Space-Saving Design
- Easy to Install
- Smart LED Display
- Available in Gas and Electric
- Coin and Cashless System Compatible
- Limited Parts Warranty 3/5/10 year

RATING

- CSA Certified
- Proposition 65 Compliant



AXIAL AIRFLOW

Highly efficient axial airflow system and tight construction result in extremely low energy usage and faster dry times.



ROLLER SUPPORTED TUMBLER

Innovative support rollers improve drum stability, ensure quiet operation, and extend the life of the machine.



TIME-OF-DAY PROMO PRICING

Easily programmable for multiple promotional events or happy hour pricing using the built-in real-time clock.

CROSSOVER 2.0

STACKED DRYERS

MODELS	
Electric Dryers	EDRYERSTACK

SPECIFICATIONS	
Capacity - lb (kg)	2 x 22 lb (10 kg)
Cylinder Volume - cu. ft. (liters)	2 x 7.7 cu. ft. (218 l)
Dry Options	High, Medium, Low, No Heat
Motor	1/3 HP
Electrical Rating - v/Hz/Ph	208-240V/60 Hz/1-phase
Breaker Requirements - Amps	30 A
Airflow	2 x 192 CFM
Electric Heating	2 x 5.0 kW
Tumbling Speed	50 RPM
Exhaust Connection	4 in (diameter)
Crated Weight - lb (kg)	2 x 176 lb (80 kg)
Uncrated Weight - lb (kg)	2 x 158.7 lb (72kg)


COMPLIMENTARY PRODUCTS

Coin Accessories Included for Stacked Sets (Dual Coin Drop)	Dryer/dryer configurations Only necessary for coin configuration (optional)
---	--

Actual color may vary. Dimensions are for planning purposes only.

Refer installation and servicing to qualified, licensed personnel. Always read installation and Operating Manuals and consult local codes before installation. Protect machines with properly rated circuit breakers ONLY. Warranty void if not properly installed.

Because of continuous product improvement, specifications are subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.

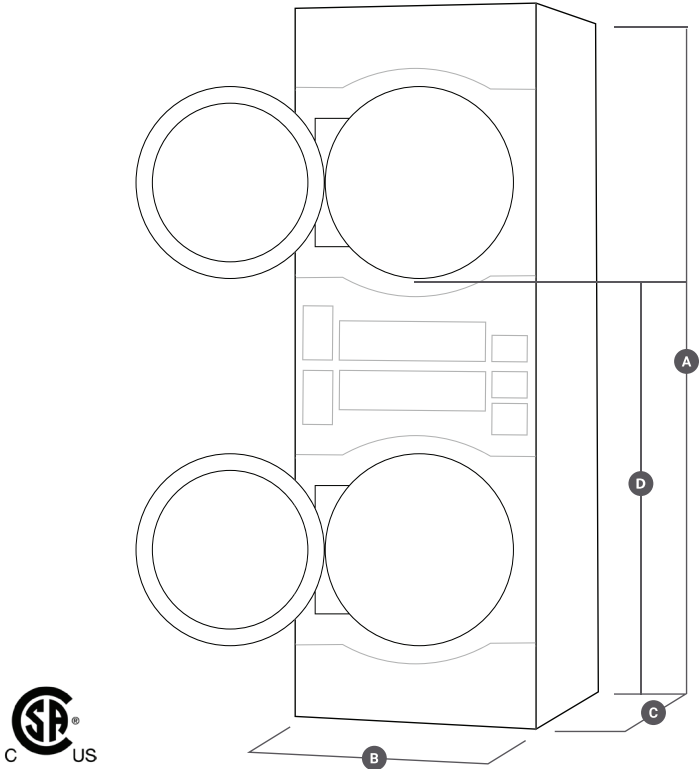

EQUIPMENT DIMENSIONS	
A. Overall Height - in (mm)	85 3/4 in (2169 mm)
B. Overall Width - in (mm)	27 in (686 mm)
C. Overall Depth - in (mm)	31 in (787 mm)
D. Height to Top Dryer Pocket - in (mm)	60 in (1524 mm)