

► SunRiver LED Wall Pack Light, 60W



Features

- ◆ Very efficient diffuser.
- ◆ Excellent light distribution with no dark shadows.
- ◆ Top of the line chips and components.
- ◆ High pressure die cast housing with anti-static powder coating.
- ◆ Premium efficiency cooling system.
- ◆ Silicon rubber gasket with durable UV stabilized lens.

Applications


- ◆ Exterior building lighting
- ◆ Carports
- ◆ Loading areas
- ◆ Driveways
- ◆ Parking areas

Product Description

SunRiver LED wall pack lights are a fantastic alternative to environmentally harmful and inefficient High Pressure Sodium (HPS) and Metal Halide (MH) lamps. SunRiver LED wall packs have been optimized to deliver outstanding efficiency and high application performance to provide great light coverage and very attractive return on your investment. The traditional look of this wall pack makes it a great choice for many new and remodel applications. These DLC listed wall pack lights are installed at commercial buildings, car dealerships, parking lots, parks, retail facilities, multi-family buildings and university campuses, etc.

Technical Data

Product No.	Watt	Size (Inch)	CCT	Luminous Output	Voltage	IP
WP4860	60	14.3*9.37*9.84	5000K	7800lm	AC100~277V	65

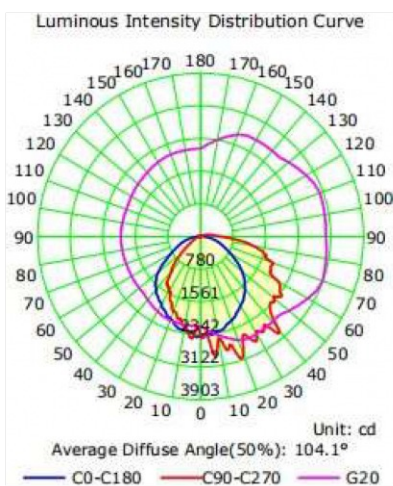

The Average Illuminance Effective Figure

Flux Out: 4666.67lm

Height	Avg./Nadir, E	Beam Angle: 104.3°	Diameter / Area
1.0m	898.09/ 2365.55lx		2.57m / 5.20sq.m
2.0m	224.52/ 591.39lx		5.14m / 20.78sq.m
3.0m	99.79/ 262.84lx		7.72m / 46.77sq.m
4.0m	56.13/ 147.85lx		10.29m / 83.14sq.m
5.0m	35.92/ 94.62lx		12.86m / 129.90sq.m
6.0m	24.95/ 65.71lx		15.43m / 187.06sq.m
7.0m	18.33/ 48.28lx		18.01m / 254.61sq.m
8.0m	14.03/ 36.96lx		20.58m / 332.56sq.m
9.0m	11.09/ 29.20lx		23.15m / 420.89sq.m
10.0m	8.98/ 23.66lx		25.72m / 519.62sq.m

