



INSTALL **CRYSTAL** AND BULBS

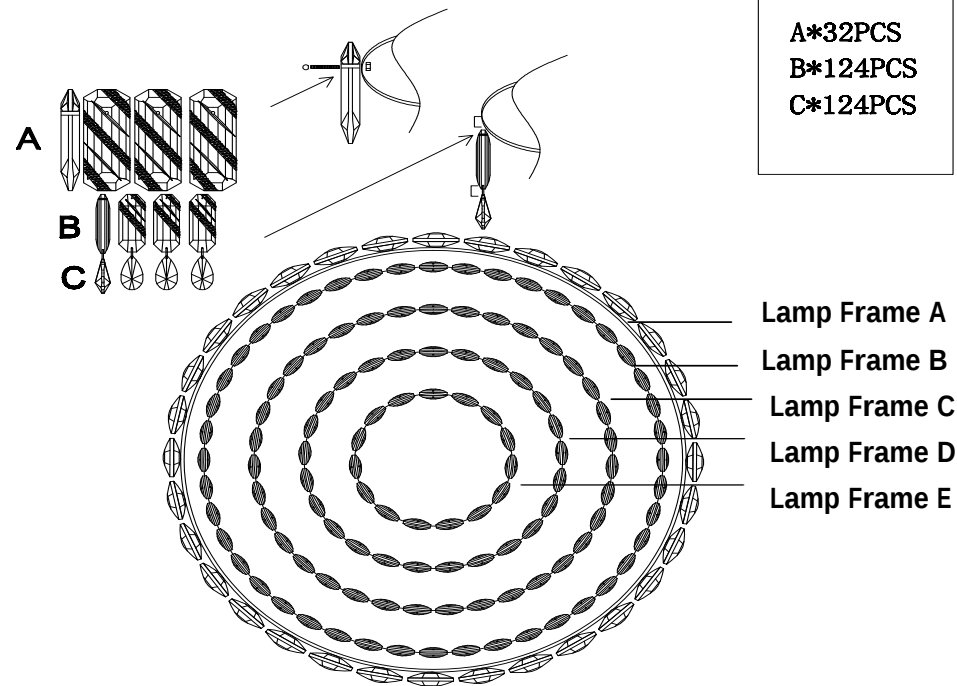

Step 4:

Secure Crystal C and Crystal B with Staple Clip, thread the Staple Clip through the Crystal B and Lamp Frame (B / C / D / E) and bend to secure.

Use Screw to insert the Crystal A into the holes of the Lamp Frame A and fix it with Hex Nut.

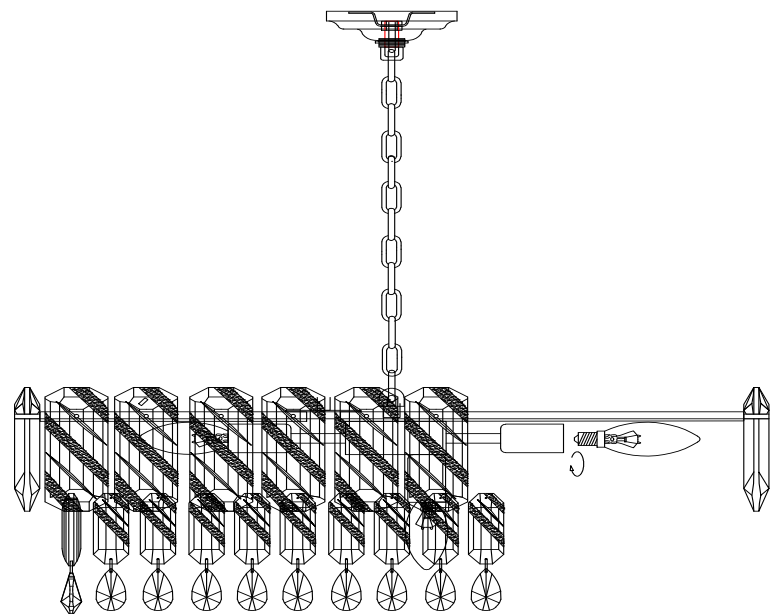

Step 5:

Install the E12 bulbs (not included).

NOTE:

This lamp uses E12 bulb base and can only be used in conjunction with LED bulbs up to 20W.

Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).

INSTALLATION


MANUAL

Model No.: GMP002-11A


TOOLS REQUIRED



Ladder




Pliers




Wire

Strippers




Screwdrivers


MOUNTING AND WIRE

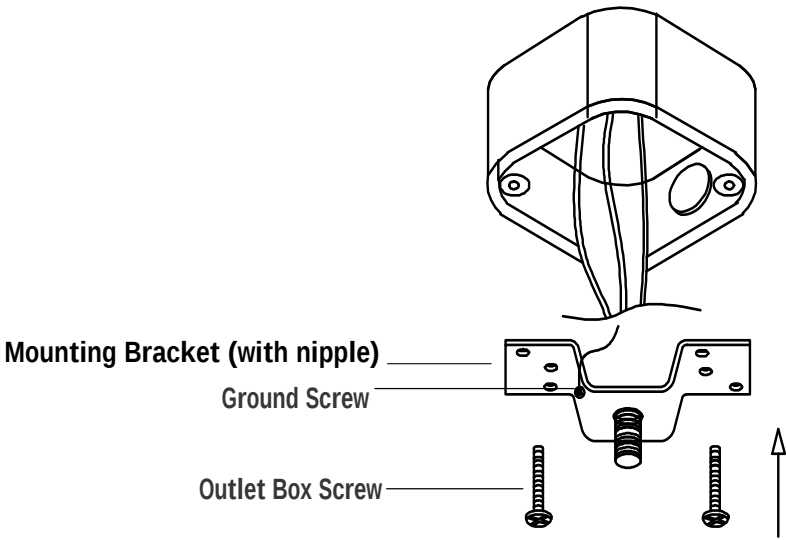

Step 1:
Take off the screws from outlet box, attach the Mounting Bracket to the box with screws taken off or Outlet Box Screw.

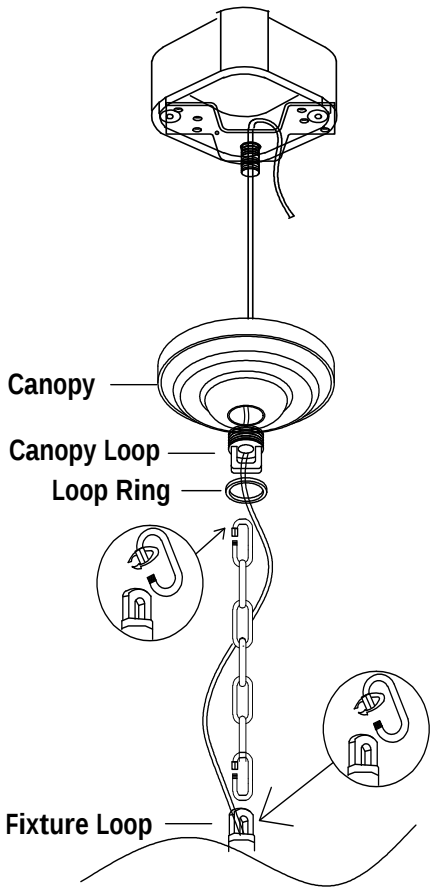

Step 2:
1. Pass the power wires through Fixture Loop / Chain / Loop Ring / Canopy Loop / Canopy / Mounting Bracket (with nipple) as shown.
2. Open the Quick Link on Chain, then connect the Quick Link on both ends of Chain to the Canopy Loop and Fixture Loop, finally lock the Quick Link tightly.

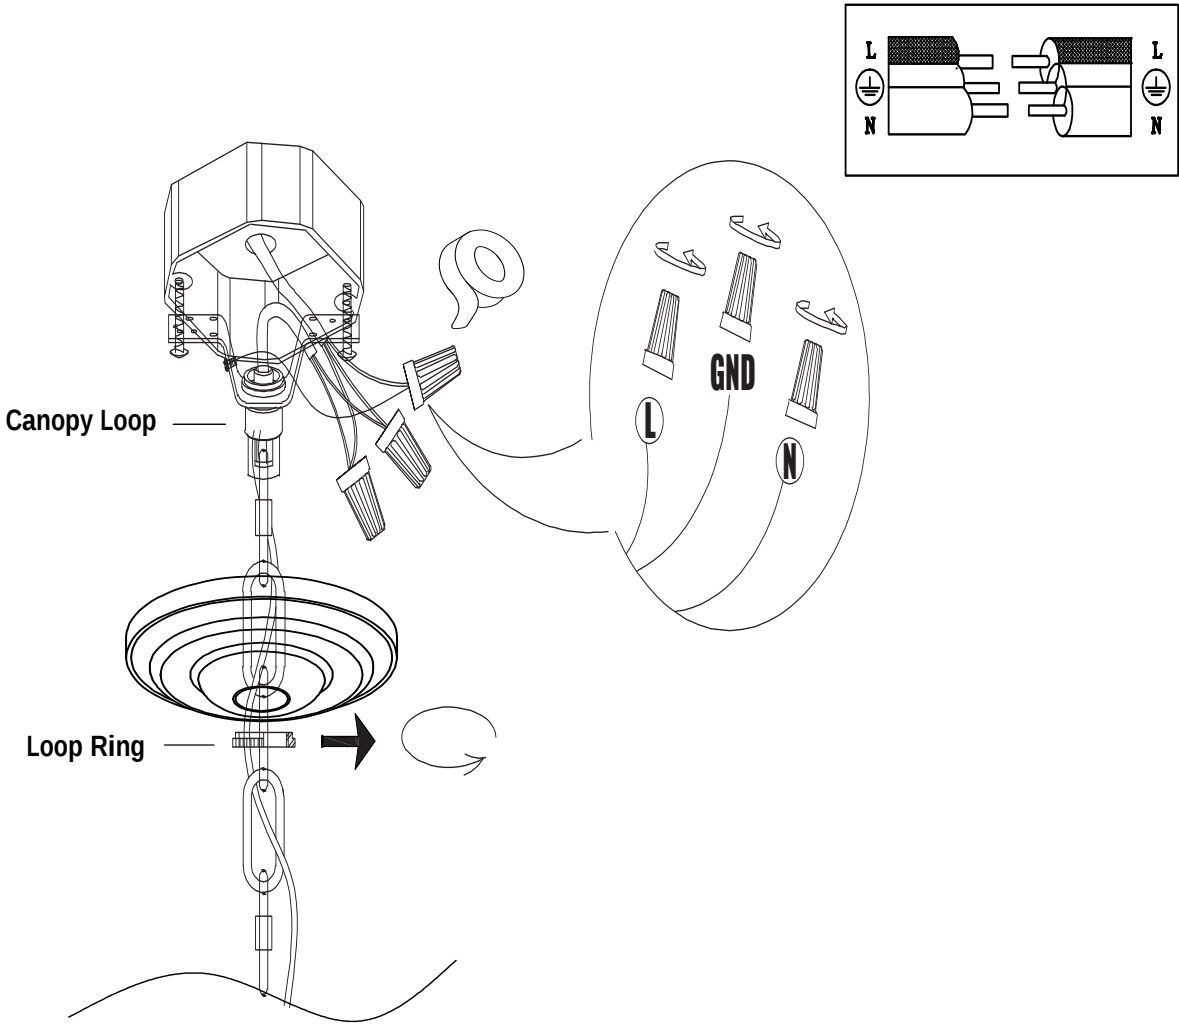

Step 3:
1. Connect the wires from the fixture to the house supply wires with Wire Nuts, ground wire (green, green / yellow, or bare) to ground wire, neutral wire (white) to neutral wire, and hot wire (black) to the hot wire. Wrap the connection with electrical tape.
Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other side.
2. Lock the Canopy Loop into the Mounting Bracket (with nipple), then attach the Canopy to the ceiling, and screw with Loop Ring.