

INSTALLATION INSTRUCTIONS

Item#4605-101 (New. 11/03/2017) *Fixture.*
READ AND SAVE THESE INSTRUCTIONS

16W x 13 3/4" H EXT. 12 1/4"

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
3. Secure metal tube (K) (R) into nipple (N) of the fixture body (O). (The height of metal tube (K) (R) has keep to the same after the installation)
4. Align canopy (F) followed by lock washer (I) and metal washer (H) onto metal tube (K) (R) and secure with hex nuts (G) via wrench (J) included.
5. Thread the nipple (E) into the crossbar (C) until snug. Note: The length of the nipple (E) into the crossbar (C) may be adjusted if necessary.
6. Use the lock washer (B) and hex nut (A) to secure the nipple (E) into the crossbar (C).
7. Take this crossbar (C) assembly and mount it to ceiling outlet box with mounting screws (D) (Size: #8-32N*L0.5"). The side of crossbar marked with "GND" must face out.

CONNECTING THE WIRES (Fig. 1, Fig. 2).

8. At this point, connect the electrical wires as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided.
9. Tuck the wire connectors neatly into the ceiling Junction Box and then raise the canopy all the way to the ceiling.

COMPLETING THE INSTALLATION (Fig. 1)

10. Place the canopy (F) over the nipple (E), and secure the canopy (F) against the ceiling using knurled cap (S).
11. Install the light bulb(s) (M) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)** (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).
12. Install the glass shade (L) onto the socket cup (P).

4 X 60 Type T10
 Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.


Box. 18 1/4" X 15 3/4" X 10"

N.W. 3.44 Kgs

G.W. 4.96 Kgs


Fig.1

Set#A-010
 -Mounting Plate
 -Ground Screw
 -Mounting Screw*2

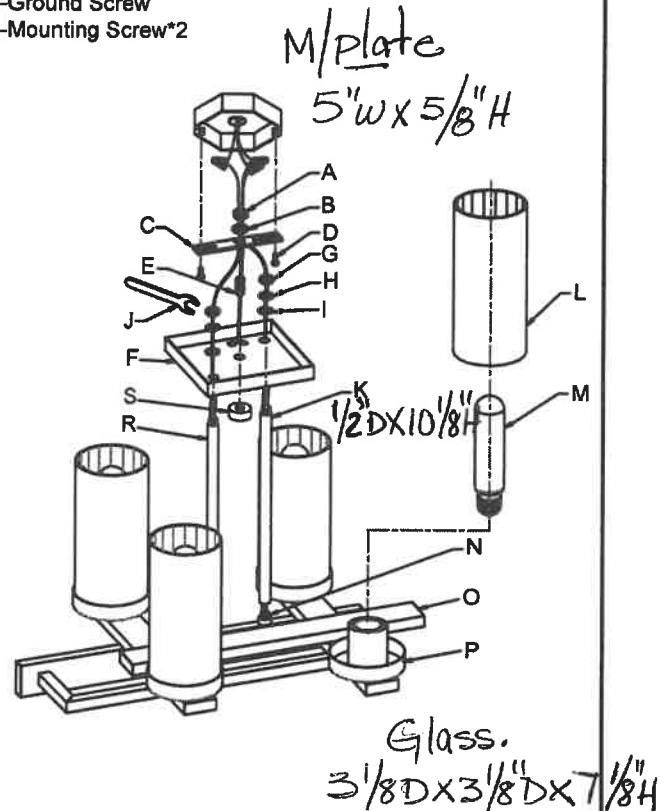

Spanner#WRH-Y-89

Fig. 2

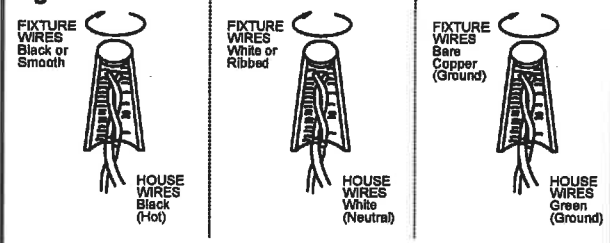

american
lighting
association

LA-2866E