

Please go to [www.quoizel.com](http://www.quoizel.com) for product cleaning tips. Go to the **Care + Maintenance** selection.

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (2) LED G9 4.5W Bulbs, Maximum 60W G9 Xenon Clear Bulbs

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

**Note:** If the style you purchased is PCSW8602C or PCSW8602BN it is NOT provided with light bulbs. If the style you purchased is PCSW8602CLED or PCSW8602BNLED it is provided with (2) G9 LED light bulbs. The G9 LED bulb is an energy efficient bulb and will reduce the use of electricity in comparison to G9 Xenon bulbs, saving you money. Please go to [Quoizel.com](http://www.quoizel.com) to see the G9 LED bulb specifications provided with your fixture.


## ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

## Package Contents

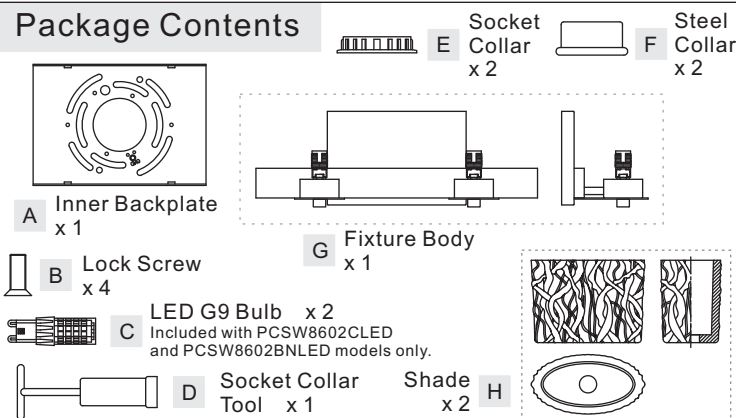

## STEP 1 - Install Inner Backplate and Fixture Body

- Pass the supply wires through Inner Backplate (A). Attach Inner Backplate (A) to Outlet Box with the head of Green Ground Screw facing you. Secure it with Outlet Box Screws (Not included). Tighten until snug.
- Race all supply wires through the Inner Backplate (A) as shown. Refer to Step 2 for wiring connections.
- Attach Fixture Body (G) over Inner Backplate (A) and secure with Lock Screws (B). Tighten until snug with screwdrivers.




Figure 1

## STEP 2 - Wire Connections

- Use standard wire connectors (not included) to make all wire connections. (Connectors are not included with fixture.) Twist

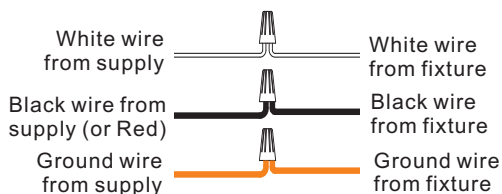


Figure 2

## (Step 2 Continued)

connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires between Inner Backplate (A) and Fixture Body (G).

## STEP 3 - Install Shades, Bulbs and Bulb Shields

- Place Shade (H) and Steel Collar (F) over the Socket, secure by using Socket Collar Tool (D) threading Socket Collar (E) onto the Socket. Hand tighten until snug.
- Install either the G9 Xenon bulb as specified (not provided) or install the G9 LED bulbs (provided) if the fixture purchased is the LED model.

**Note:** This fixture is rated to use 60W maximum G9 Xenon bulbs. You may use a lower wattage G9 Xenon or if you purchased the LED model it is supplied with G9 LED bulbs.

Your fixture is now assembled and ready to use. Enjoy!

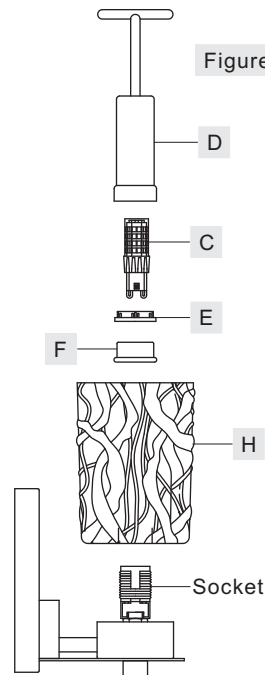







Figure 3

## CAUTION FOR BULB REPLACING

When replacing bulbs, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.

Thank you for purchasing a Quoizel product.  
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)

|                         |                          |
|-------------------------|--------------------------|
| PCSW8602C/PCSW8602CLED  | PCSW8602BN/PCSW8602BNLED |
| FINISH: POLISHED CHROME | FINISH: BRUSHED NICKEL   |

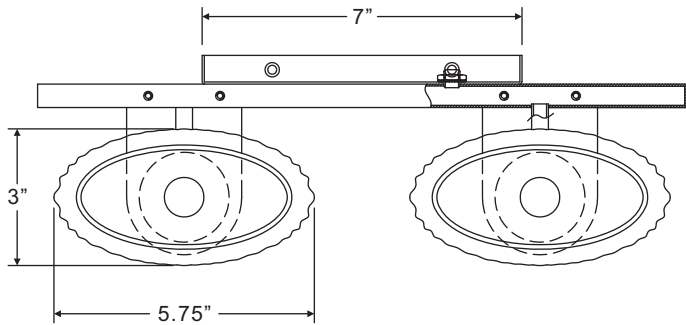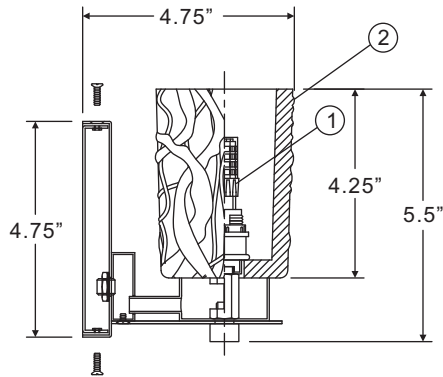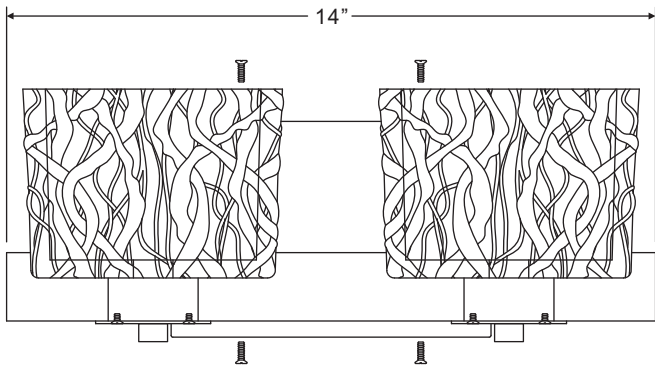

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

| NO. | PART NUMBER | REPLACEMENT PART DESCRIPTION | QTY. |
|-----|-------------|------------------------------|------|
| 1   | I12442LED   | BULB 4.5W LED G9 DIM WHITE   | 2    |
| 2   | G12068SH    | GLASS SHADE                  | 2    |