

SEMI-FLUSH MOUNT

FX-0512 / FX-0513

INSTALLATION MANUAL

WARNING:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

- * Check for electric, gas, & plumbing lines before drilling or consult a professional.
- * Turn off your electricity at the circuit breaker or main fuse box before installation.
- * Do not restore power to the line until fully installed.
- * Do not exceed the recommended wattage.
- * Always allow bulbs to cool for 10 minutes before changing.


This fixture has been rated for up to **four (4) E12 Socket 40-Watt maximum** light bulbs or LED equivalent bulbs (not included).

To avoid the risk of fire, DO NOT EXCEED THE RECOMMENDED LAMP WATTAGE.

The lighting fixture is meant for indoor use.

Pls read the installation instructions carefully and follow the steps:

1. Thread wire go through metal tubes and canopy.
2. Connect canopy, metal tubes (optional) and socket assembly.
3. Remove wall bracket from canopy. Then attach the wall bracket to outlet box (not included) with mounting screws.
4. Make electrical connections using wire nuts.
5. Attach canopy to the wall bracket and screw it by canopy nuts.
6. Install the light bulbs (not included).

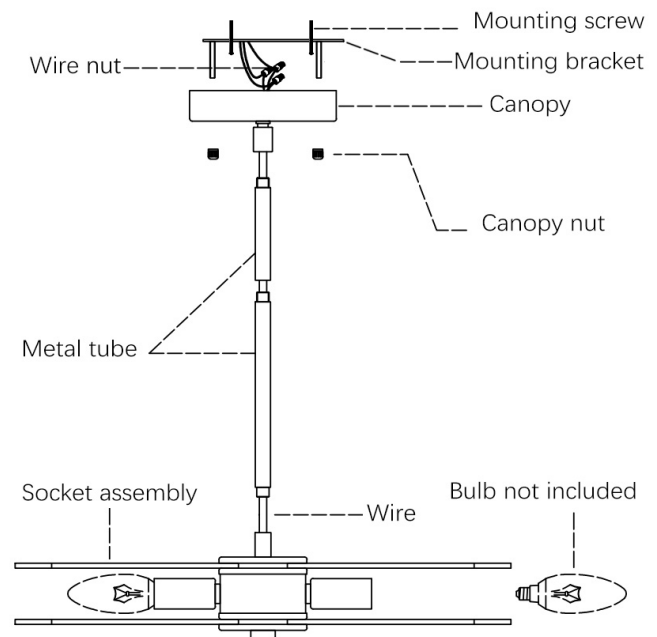

Thanks for your purchase!