




ASSEMBLY INSTRUCTION MODEL#NIL-70012-BF-MG



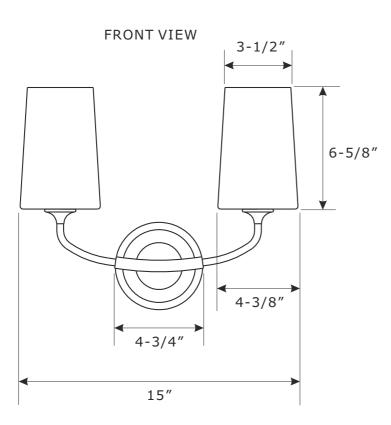


All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 2- Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated

How to install

- 1. Install the mounting plate to the outlet box using two outlet box screws.
- 2. Install backplate onto the mounting plate, and secure with the screws.
- 3. Install the glass shade and spacer over the socket, and secure with the socket ring using a wrench.
- 4. Install the bulb (not included) into the socket.

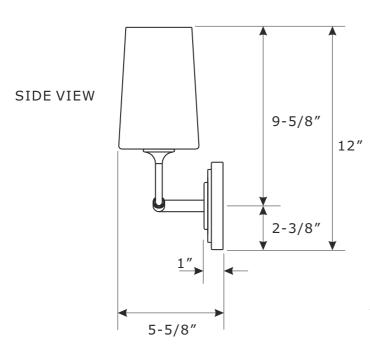



This fixture can be mounted either upwards or downwards





ASSEMBLY INSTRUCTION MODEL#NIL-70012-BF-MG

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Mounting plate
- C. (1)-Backplate W4-3/4"xH1" #XRF70012BFMGBKP4.7IN
- D. (2)-Screw
- E. (2)-Socket
- F. (2)-Glass shade #XRF70012BFMGGLA6.6IN
- G. (2)-Spacer
- H. (2)-Socket ring
- I. (1)-Wrench

