


Features

- Includes mirror defogging
- Dimmable LED task lighting to 1%
- Compatible with most Triac/Phase-cut dimmers
- Energy efficient LED lighting:

Kelvin	2700	4000
CRI	90+	90+
Lumens*	746-1488	746-1488
Lux*†	409	409
R9 Value*	50+	50+
Foot-candles*†	38	38
Watt Output - LED	25	25
Watt Output - LED with defogger on	62	62

* Based on a measurement of subset of sizes, shapes and lighting styles

† Measured at 18" from center of the mirror

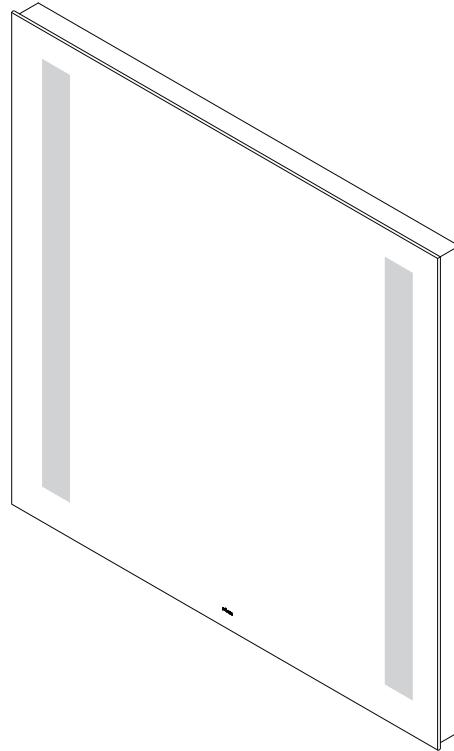**Construction**

- Anodized aluminum back frame
- Quality polished edge mirror
- Power cords installed for easy plugin installation
- Constructed for surface mounting
- Includes installation hardware

Codes/Standards Applicable

Vitality Mirror is UL certified to:

- UL 962
- CSA-C22.2, No. 12-82

Dimensions

Height: 30" (762 mm)

Width: 30" (762 mm)


Depth: 1-3/4" (45 mm)

Model Number Key

Vitality	Mirror	Width	Height	Shape	Light Pattern	Edge Type	Options	Color Temp
Y	M	30	30	R = Rectangle	C = Column	FP = Flat, Polished	D = Defogger	3 = 2700K 4 = 4000K

Electrical System

- 120 Vac 60Hz (TBD) recessed wall outlet as shown in drawing

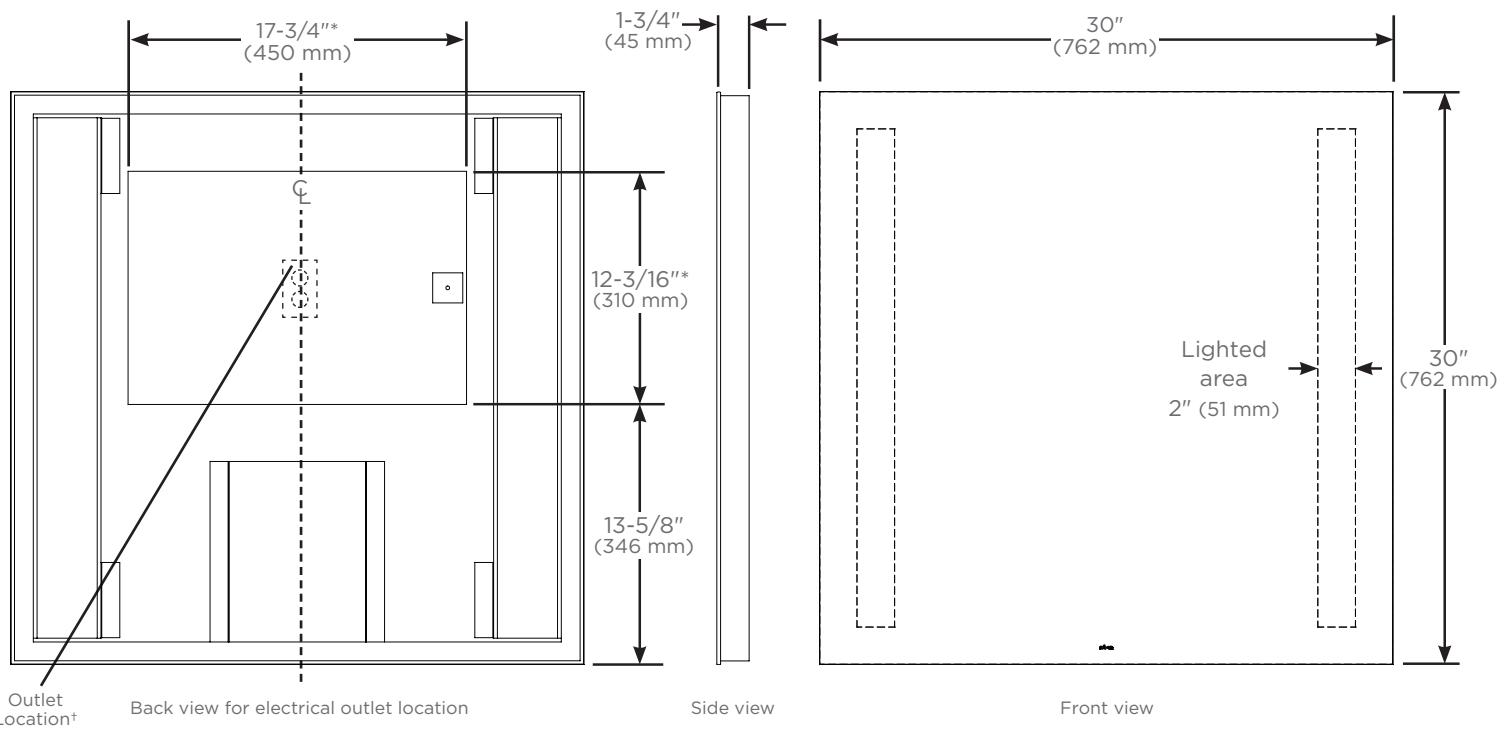

* Defogger Size

[†] See instructions for wiring and location