



# Premise™ | K-R28732-4D

Centerset bathroom sink faucet, 1.2 gpm

## Features

- Two Lever handles offer separate control of hot and cold water
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Box includes: Assembled faucet, clicker drain
- Coordinates with other products in the Premise collection
- Spout swivels to allow for unobstructed use of the sink



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

■ BL Matte Black



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
3-27-2026 16:37 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 372

NSF/ANSI/CAN 61

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

NSF/ANSI/CAN 61|NSF/ANSI/CAN 372

ADA

ICC/ANSI A117.1

CSA B651

OBC

## Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

## Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

## Technical Information

All product dimensions are nominal.

### Handle

Handle Style/ Type: Lever

### Spout

Spout Reach: 5-1/16" (128 mm)

Drain With Overflow: Yes

### Flow Rate

Faucet Flow Rate: 1.2 gpm (4.5 l/min)


## Valves

Included Valve: Ceramic disc

## Material

- Premium material construction for durability and reliability
- Spot Repel® finish resists fingerprints, smudges, and water spots (Brushed Nickel and Matte Black finishes only)



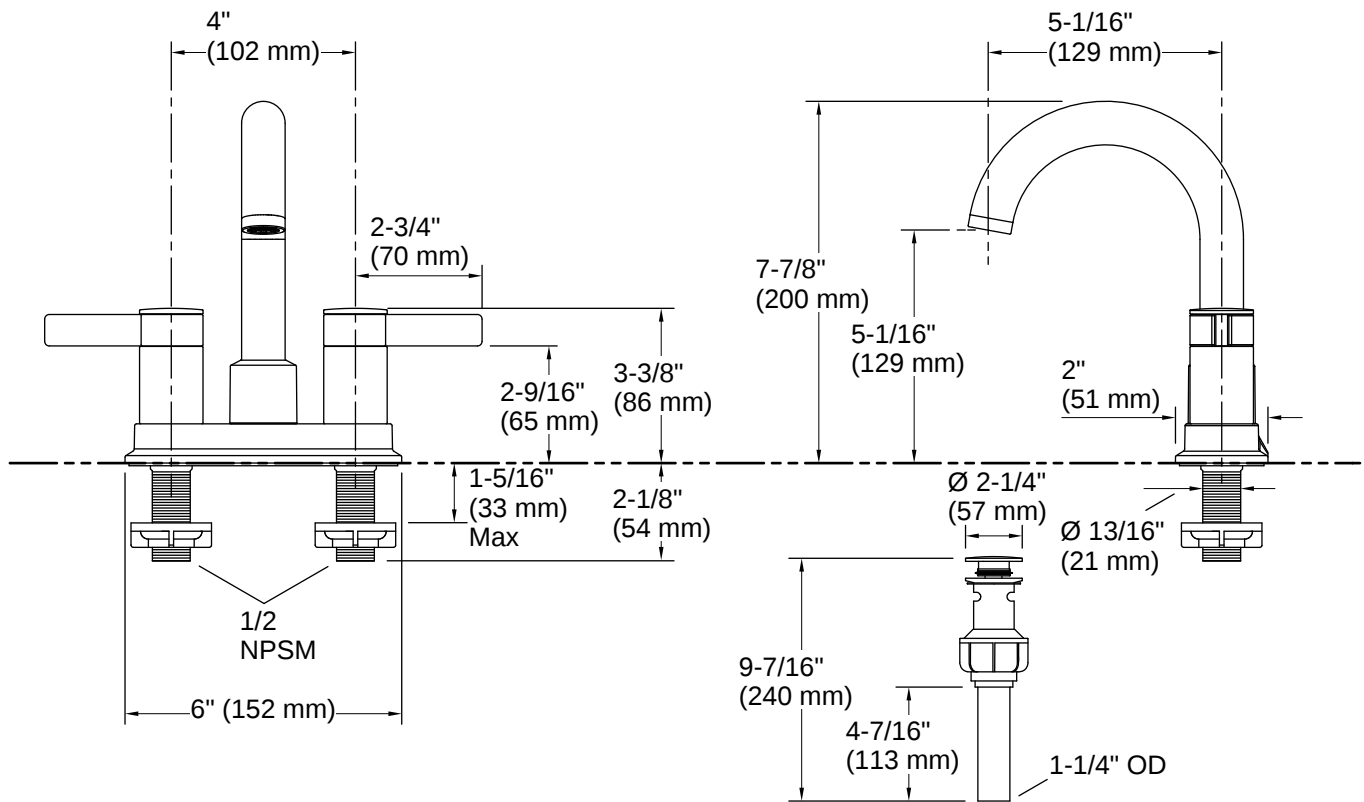

## Installation

- For 4" (102 mm) centers
- Centerset
- Simplified faucet installation; mounting hardware requires no special tools

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

