

INSTALLATION INSTRUCTIONS FOR 5431-853

For Ceiling Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT ! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Secure crossbar to the junction box (not included), using mounting screws (**Size: 8-32*1/2"L**). The side of the crossbar marked "GND" must face out.
4. Determine the desired hanging height and thread rods (C, D) to fixture body (E) and fixture loop (B). Pass the wires carefully through each rod as you assemble.
5. Open quick link (A) and connect to fixture loop (B) and the canopy loop. Then close the quick links.
6. Feed the fixture wires through the loop and canopy and pull until tight.

CONNECTING THE WIRES (FIG. 2)

7. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture ground wire directly to the crossbar using the green screw provided. After wires are connected, tuck them carefully inside the junction box.

FINISHING THE INSTALLATION (FIG.1)

8. Place the canopy over the crossbar and secure with finials.
9. Install (1) one medium base bulb (H) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
10. Put two rings (F) over glass shade (G) and cross the two rings (F) into an X shape.
11. Screw glass shade (G) to fixture body (E) by threading in clockwise direction until tight. Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Fig. 1

Set# A-012

- Crossbar
- Ground Screw
- Mounting Screw*2

Rod*1 # W30-H-853

Rod*3 # W30-1-853

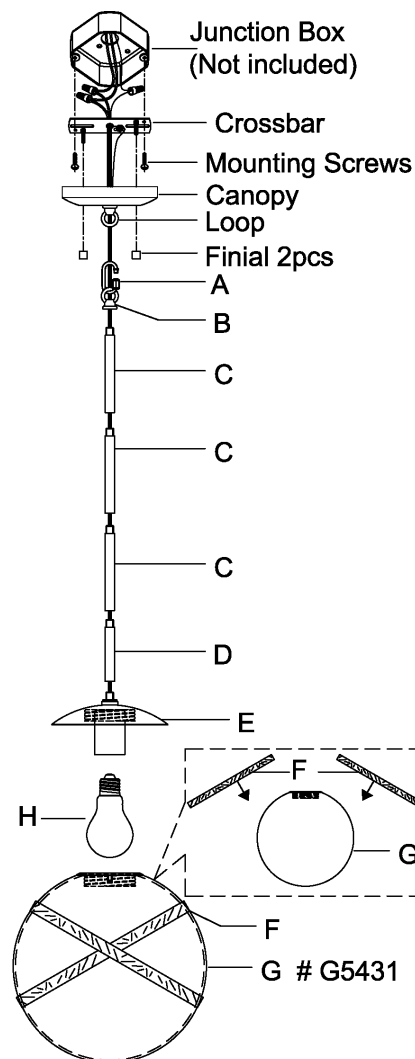


Fig. 2

