


Ashfield™ Roman Tub Trim

- RT6-5YPC Finish(CC) ☐
- RT6-5YPK Finish(KK) ☐
- RT6-5YPU Finish(UU) ☐
- RT6-5YPY Finish(Y) ☐



Specifications

Features

- Complete Collection with Coordinating Lavatory and Roman Tub Options
- Less Hubs & Handles
- Requires OX6-050R or OX6-150R Rough-In
- Trim Only, Valve and Handles Not Included
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1


- Handles Not Included
- 3-Hole Installation
- Trim Only, Valve Not Included

Dimensions

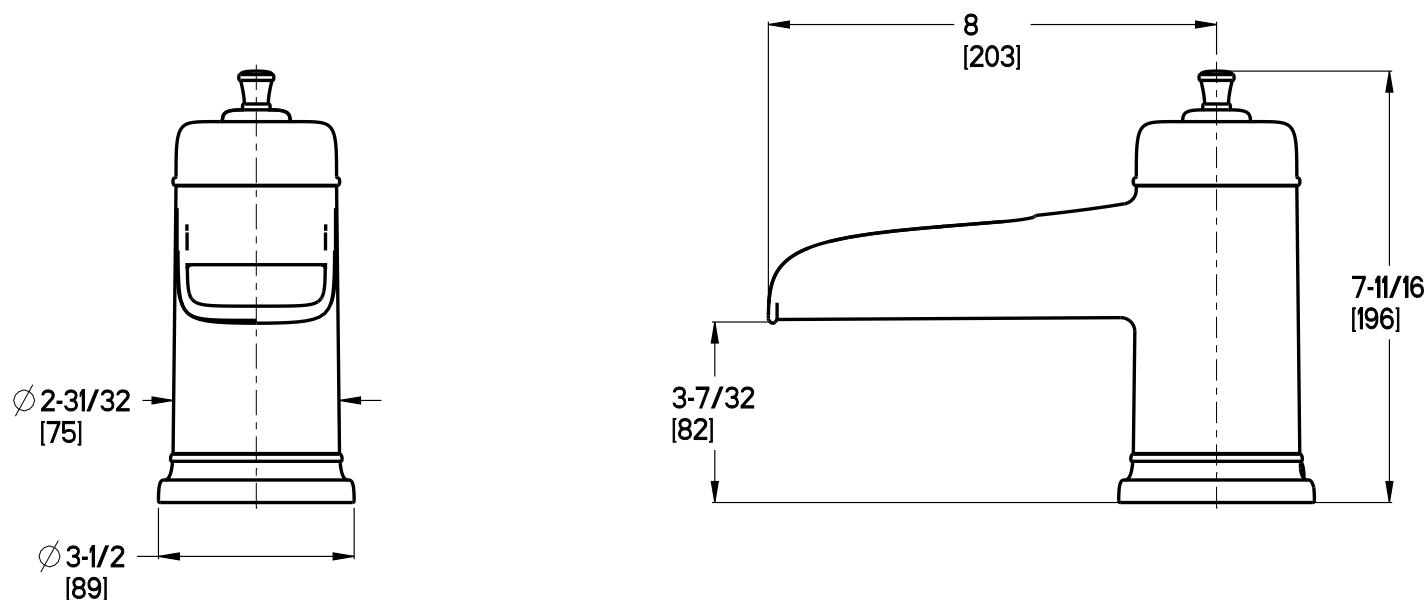

OX6-O50R Finish(XX) ☐

JX6-O50R Finish(XX) ☐

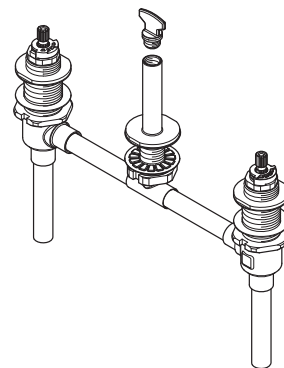

Specifications

Features


- Valve Only
- Fixed Underbody
- 1/2" Copper Sweat Connections
- 3-Hole Installation
- Job Pack Quantities (JX6 Only)
- 10" Fixed Body
- Includes Inlet Line Test Plug
- Reversible Hot or Cold Valves
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1

Dimensions

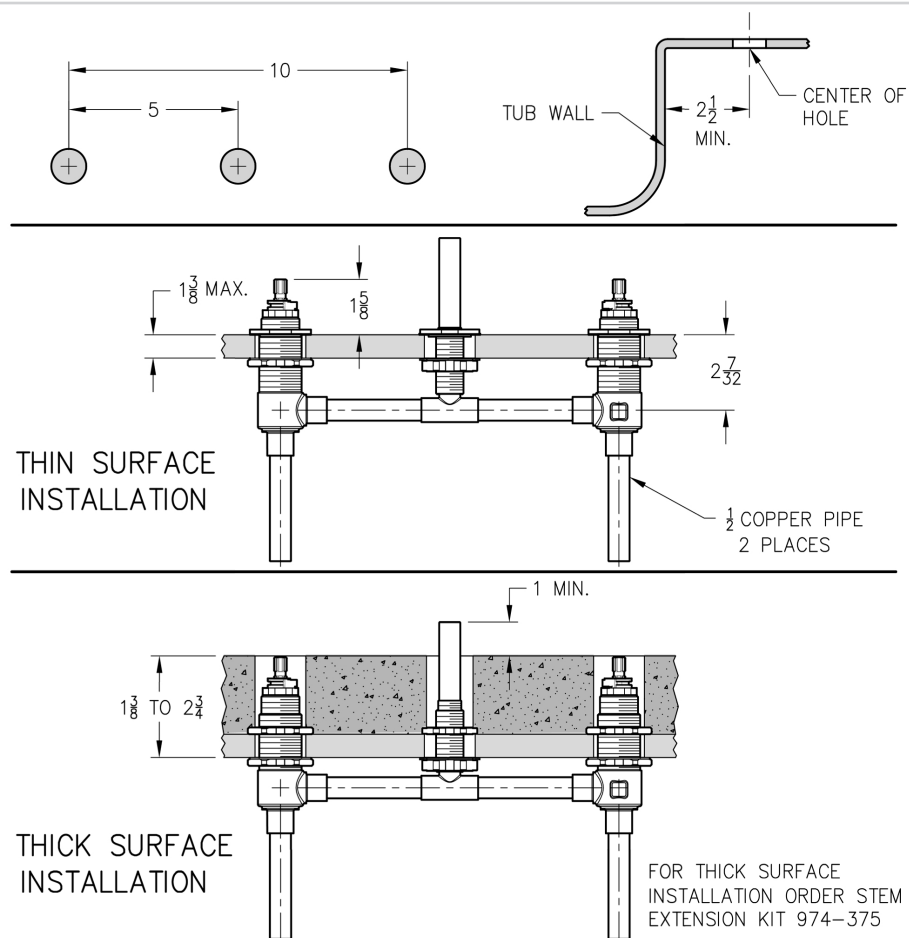

Min. Hole Size-Ø1-1/4 DIA Valve Centerline to Finished Wall-Ø2-1/2 Min.