



Wellworth® Classic | K-11464

The Complete Solution® two-piece round-front toilet, 1.28 gpf

Features

- The Complete Solution toilets provide everything you need, including bowl, tank, seat, wax ring, and hardware
- Class Five® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Two-piece design
- KOHLER's canister flush valve harnesses the natural force of gravity and optimizes flushing performance
- 1.28 gpf high-efficiency toilets provide significant water savings of up to 16,500 gallons per year versus an old 3.5-gallon toilet without sacrificing performance
- Qualifies as an HET(High-Efficiency Toilet). Consumer rebates are available in some municipalities
- Round-front bowl
- 2-1/8" (54 mm) fully glazed trapway
- 1.28 gpf (4.8 lpf)
- Left-hand trip lever



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 19:13 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Class Five
Flush Rate:	1.28 gpf (4.8 lpf)
Bowl Shape:	Round-front
Seat-Mounting Holes:	5-1/2" (140 mm)
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Exposed
Water Surface Size:	10-1/2" x 7-3/4" (267 mm x 197 mm)
Rim to Water Surface:	5-1/4" (133 mm)

Recommended Products/Accessories


- K-23726 Drain treatment
- K-5589 Deodorizing round-front toilet seat
- K-5420 Low-profile toilet bolt caps

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty



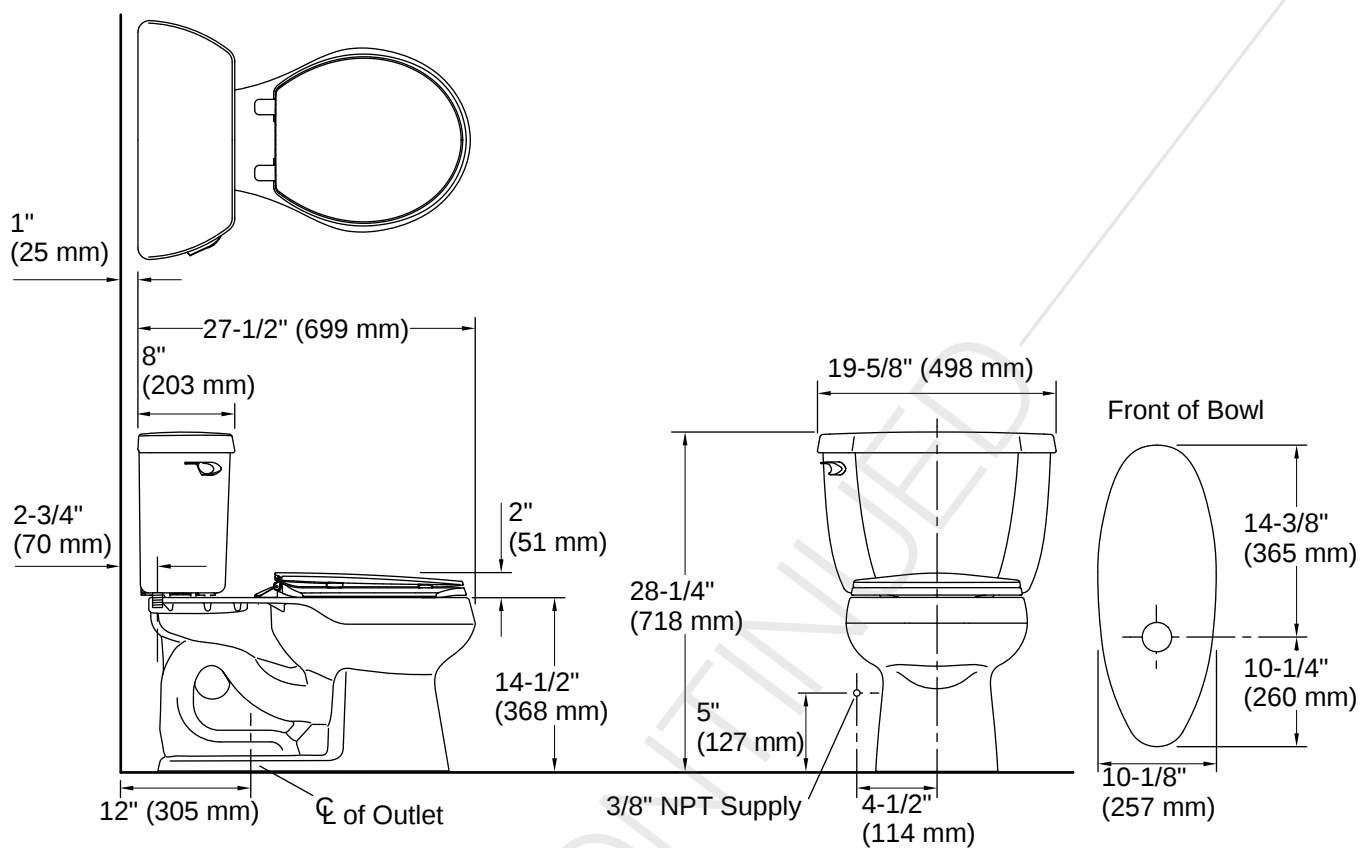

Installation

- Supply line sold separately
- Floor-mount /floor outlet
- Standard 12" (305 mm) rough-in

Installation Notes

Install this product according to the installation instructions.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 19:13 - US-CA

THE BOLD LOOK
OF **KOHLER**®