

Installing Your Register

To install your new Inte-Grates register, simply grab the face of your old register and lift it out of the vent. Remove your new register from the package and place it in the opening. If you are installing the Pro Install register, secure it in place with the screws provided. Due to varying vent sizes, gapping may occur around damper box.

DROP-IN REGISTER

To install your new Drop-In register from Inte-Grates, simply remove your old register from the vent and place the new register in it's place. For steps on how to create a custom insert, see page five.

[WATCH INSTALLATION GUIDE](#)




PRO INSTALL REGISTER

To ensure that you are getting the most out of your Pro Install register by Inte-Grates, it is recommended that the Pro Install register be installed at the same time as the floor installation to guarantee that the register is completely flush to the height of the floor.

To install your new Pro Install register from Inte-Grates, simply remove your old register from the vent and put the Pro Install register in it's place. Next fully secure your new register using the screws provided. For steps on how to create your custom insert, please see page five.

[WATCH INSTALLATION GUIDE](#)

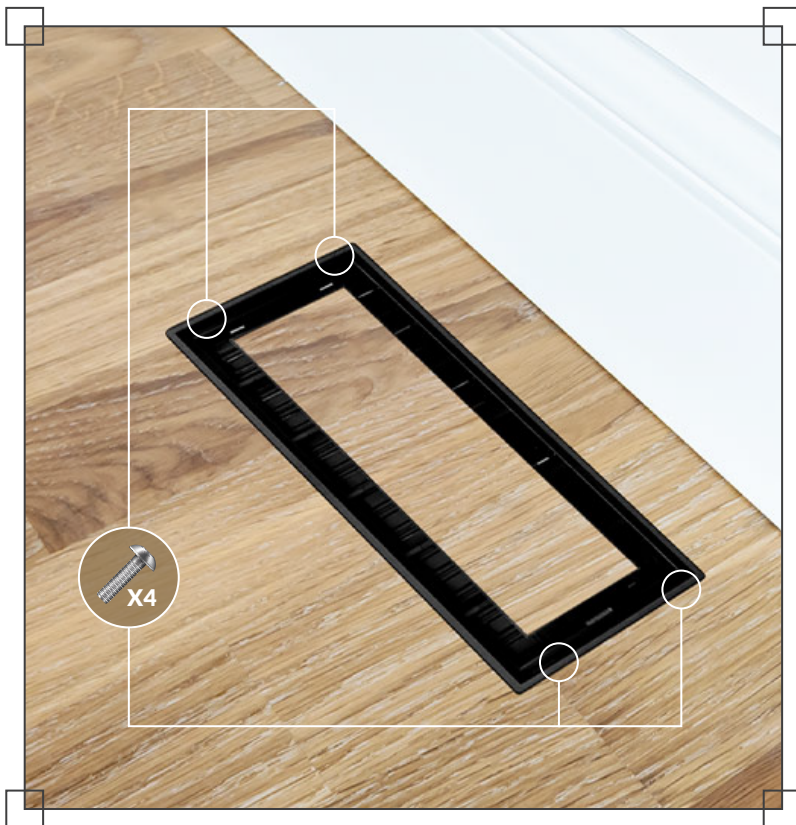

Creating A Custom Insert

To get the most out of your new Inte-Grates register, you will need some of your homes' matching flooring as the insert is not included in purchase. To create your insert cut your extra home flooring using the template provided with purchase. If your flooring is less than 0.75" thick, use a block of wood or similar material to backfill the center tray to ensure that the insert is flush to the top of the center tray, then secure your newly cut floor insert on top.

