



Item Number: 5069681

WARNING (To reduce the risk of fire, electric shock, or personal injury):

1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at a later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
A) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “**OFF**” position.
B) Place the wall switch in the “**OFF**” position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.






IMAGE FOR FINISHED PRODUCT:





TOOLS REQUIRED (NOT INCLUDED):

Before starting assembly and installation please prepare the needed tools as below picture


				
Ladder	Phillips head, flat blade screwdriver	Electrical tape	Portable driller	Hammer

PARTS TYPE & QTY INCLUDING:

- (C) Strain relief (10)
- (D) Cord (5)
- (F) Mounting plate (1)
- (G) Green ground screw (1)
- (I) Canopy (1)
- (J) Ball knob (2)
- (L) Socket (5)
- (M) Wire lampshade (5)
- (N) Glass shade (5)
- (O) Socket ring (5)

ACCESSORIES & QTY ENCLOSED:

- (A) Wood screw (4)
- (B) Plastic Wire Connector (3)
- (E) Plastic anchor (4)
- (H) Mounting screw (2)
- (K) Allen wrench (1)
- (P) Socket wrench (1)

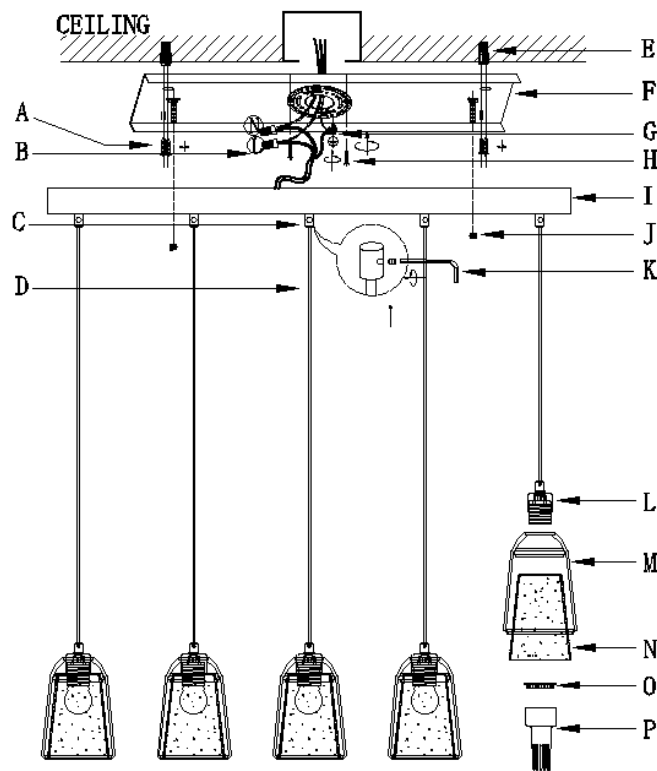


ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. **Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.**
2. **Turn off power**
Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.
 - A) **Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.**
 - B) **Place the wall switch in the "OFF" position.**




3. Make installation

A1: Unscrew ball knobs (J) from canopy (I), then gently remove mounting plate (F) from canopy (I).

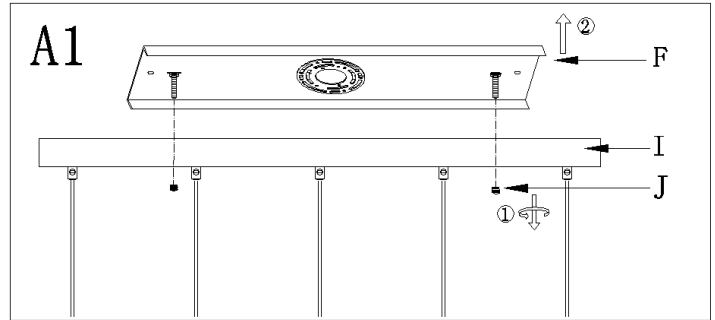


A2: Adjust the length of cords (D) to achieve the desired height of the mounted fixture.

- 1) Use Allen wrench (K) to unscrew the screws in strain reliefs (C), carefully pull and push cords (D) from canopy (I) and strain reliefs (C) to lengthen or shorten cords (D).
- 2) Once the desired height of fixture is achieved, carefully tighten the screws in strain reliefs (C).

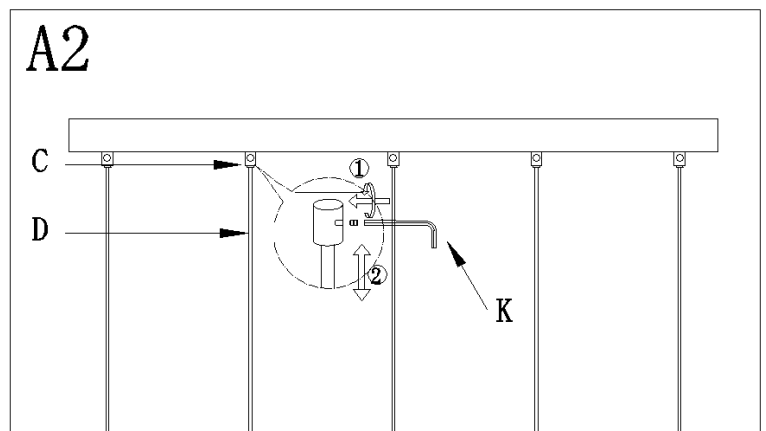

A3: Secure mounting plate (F) to the outlet box with mounting screws (H), plastic anchors (E) and wood screws (A).

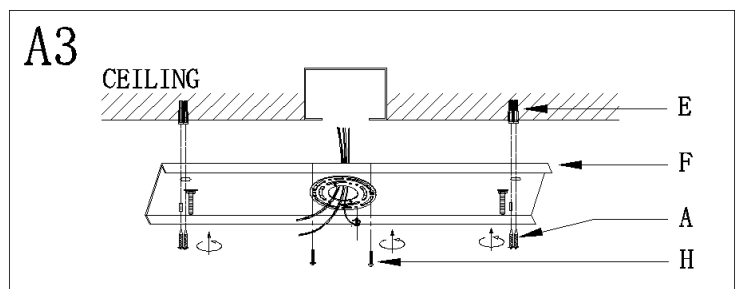




4. Make wire connections

Connect wires as below wires connection shown. **PLEASE REFER TO THE FOLLOWING CHARTS, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**


Connect ground wires according to the below chart

Connect wires according to the below chart

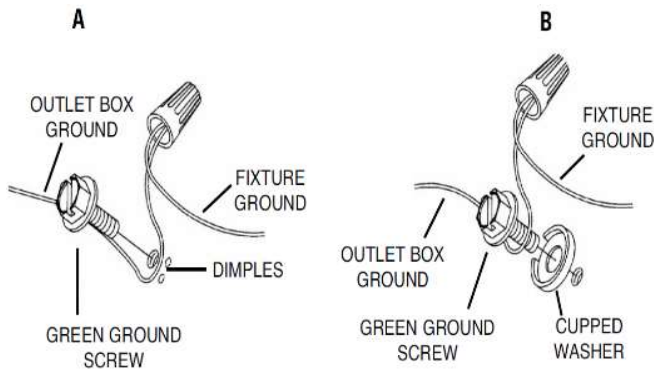


Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)




Twist wires together with plastic wire connector until tightly joined, and wrap each connector with approved electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

A4: Align the holes in canopy (I) with the pre-assembled mounting screws, then attach canopy (I) using the previously removed ball knobs (J). Hand tighten until snug.

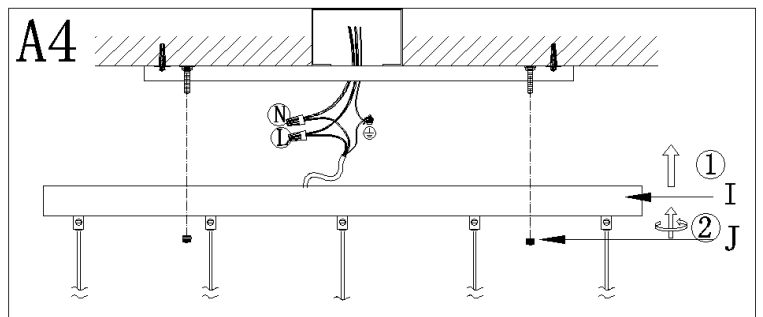

A5: Unscrew socket rings (O) from sockets (L). Carefully position glass shades (N) and wire lampshades (M) onto the sockets (L). Then secure glass shades (N) and socket rings (O) in place with socket wrench (P). Hand tighten till snug.

Install bulbs (Not included) (Please do not exceed the maximum wattage recommended on the socket.)

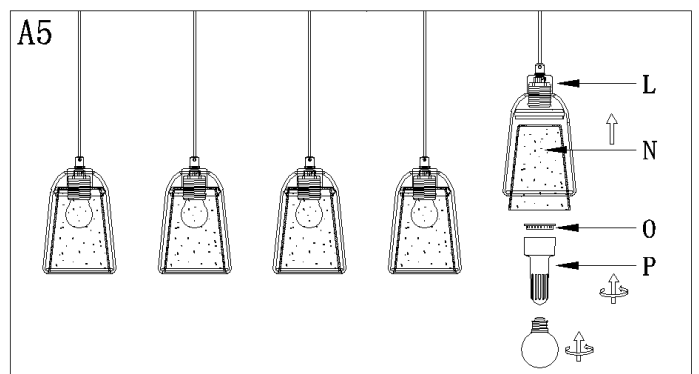

5. Check everything is installed properly, then you could turn on the light. Enjoy!

CLEANING

To clean, wipe the fixture with a soft cloth. Clean glass with a mild cleaner (such as mild and non-abrasive soap.) Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.