

JQG7507 | JQG7507-Y MOONSHADOW Collection

30" Slant Vent Prestige Performance Series Range Hood

FOTILE
A BREATH OF FRESH ENGINEERING®



Color Variations

-  MOONSHADOW Grey
-  Onyx Black

Main Features

MOONSHADOW Color

Exclusive designer color with frosted matte anti-glare glass finish that resists fingerprints and water stains.

(Model JQG7507-Y only)

Onyx Black Tempered Glass

Sleek, durable, and scratch-resistant, this material meets cooking safety requirements and is easy to clean. Its **glossy finish** adds a touch of sophistication to any kitchen.


(Model JQG7507 only)

Sync Connect with Cooktop*

Seamlessly **sync with select FOTILE cooktop** for automatic fan and LED light control.

90° Automatic Capture Shield

Prevents smoke dispersion with an extra-wide fume inlet, providing consistent suction pressure from all angles and **covering up to 6 sq.ft.**

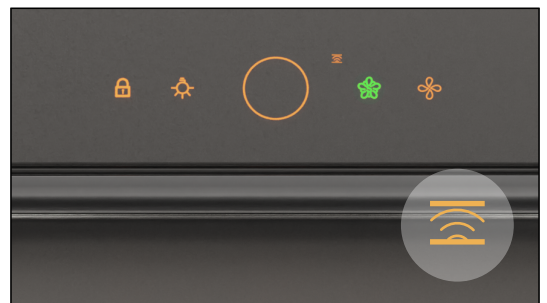

Stir-Fry Mode with a Power Boost

Provides an extra power boost of 1100 Max Equiv. CFM** to effectively tackle heavy smoke and cooking odors—**100 CFM more** than the previous Prestige Series.

Motion Activation and Auto Delay Shutoff

Hands-free operation and a default **5-minute delay** allow for a hassle-free shutdown.



*This feature is available with any FOTILE cooktop that features Sync Connect.

**FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (6 sq.ft.) and achieve a 95% oil filtration rate, and 98% odor reduction rate, keeping your kitchen smoke free and smelling fresh.

JQG7507 | JQG7507-YMOONSHADOW Collection

30" Slant Vent Prestige Performance Series

Range Hood

FOTILE

A BREATH OF FRESH ENGINEERING®

Specifications



Model: JQG7507-Y



Model: JQG7507

Style and Design		
Color	MOONSHADOW	Onyx Black
Material	Anti-glare Glass	Tempered Glass
Installation	Under Cabinet or Wall Mount	
Operation	Motion + Touch + Sync Connect*	
Screen Lock	Yes	
Delay Shutoff	5 min	
Illumination (W)	3W × 2 (LED) 500 Lux	
Grease Cup	1 Oversized	
Grease Filter	Dishwasher Safe	
Performance		
Motor	Dual DC Motors	
Speed Setting	4	
Max Equiv. CFM	1100 CFM**	
Noise Level (sones)	1.2 / 4 / 6.5 / 7.5	
Noise Level (dB)	38.5 / 48.3 / 54.0 / 56.5	
Grease Filtration Rate	95%	
Odor Reduction Rate	98%	
Technical Specs		
Wattage (W)	210	
Power Supply (V/Hz)	120/60	
Vertical Duct	6” Round	
Warranty Summary		
Labor	2 Years	
Parts	5 Years (Limited)	
Motor	Lifetime (Limited)	

**FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines WhisPower Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (6 sq.ft.) and achieve a 95% oil filtration rate, and 98% odor reduction rate, keeping your kitchen smoke free and smelling fresh.

JQG7507 | JQG7507-YMOONSHADOW Collection


30" Slant Vent Prestige Performance Series

Range Hood

FOTILE

A BREATH OF FRESH ENGINEERING®

Product Dimensions

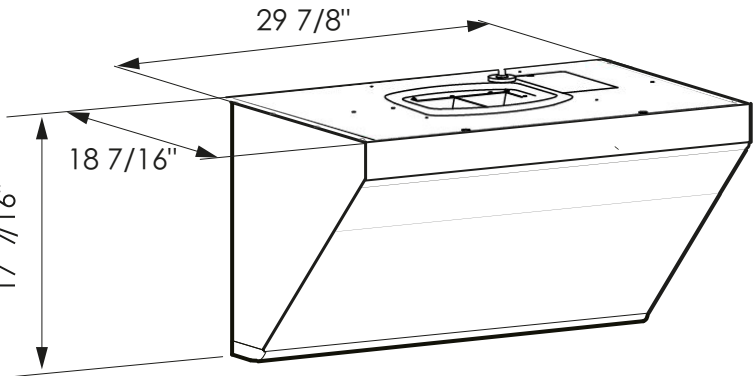

Product Dimension / Weight	
Overall Width (inches)	29 7/8"
Overall Height (inches)	17 7/16"
Overall Depth (inches)	18 7/16"
Net Weight (approx.)	64.6 lbs.
Gross Weight (approx.)	78.3 lbs.

Accessories (Optional)	
Decorative Plate	4" / 6"




Stainless steel or black color for adjusting under cabinet installation height

Ceiling Decorative Cover	8' / 9' / 10'
--------------------------	---------------




Extension decorative cover for wall-mount installation, suitable for 8-10ft ceilings

Installation Dimensions

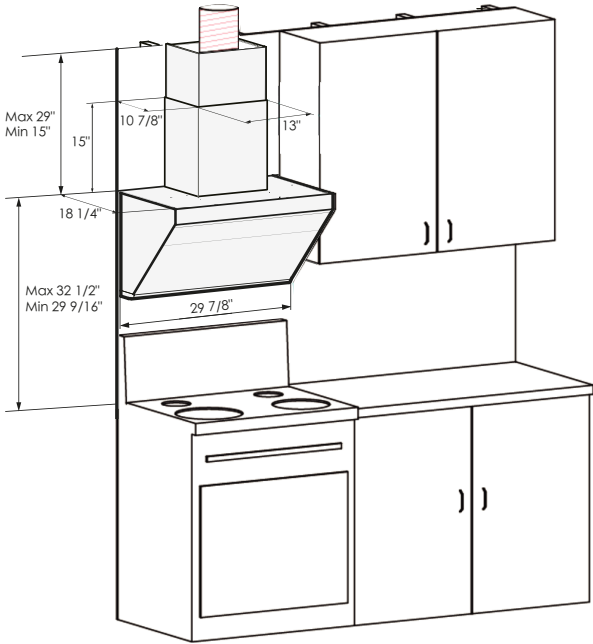

Wall-Mount Installation

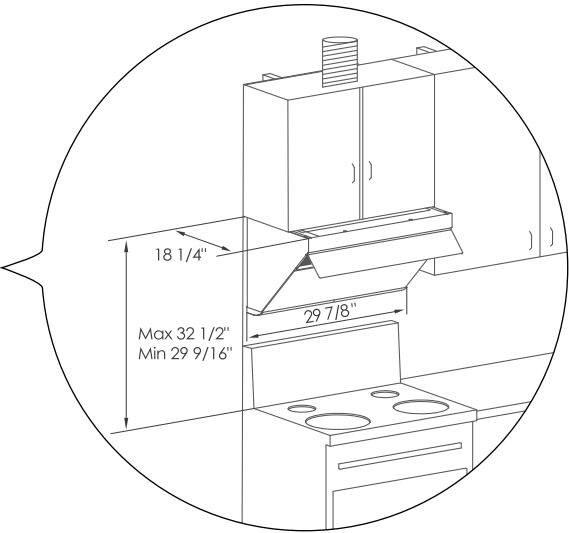

Under-Cabinet Installation

Accessories: To purchase FOTILE accessories and parts, please visit us at us.fotileglobal.com or call 1(888) 315-0366.

Notes: All height, width, and depth dimensions are shown in inches. FOTILE reserves the absolute and unrestricted right to change product materials and specifications at any time without notice. Consult the product's installation instructions for final dimensional data and other details prior to installation.

Warranties: Please see the user manual or FOTILE website for the statement of limited warranty.

For more information on our entire line of products: visit us.fotileglobal.com or call 1(888) 315-0366.

©2024 FOTILE America LLC. All rights reserved. FOTILE is a registered trademark of FOTILE Group.