




**TWOFOLD™**

**LP8551LBL**  
**(Lowes Item #2599770)**  
**60" Ceiling Fan**

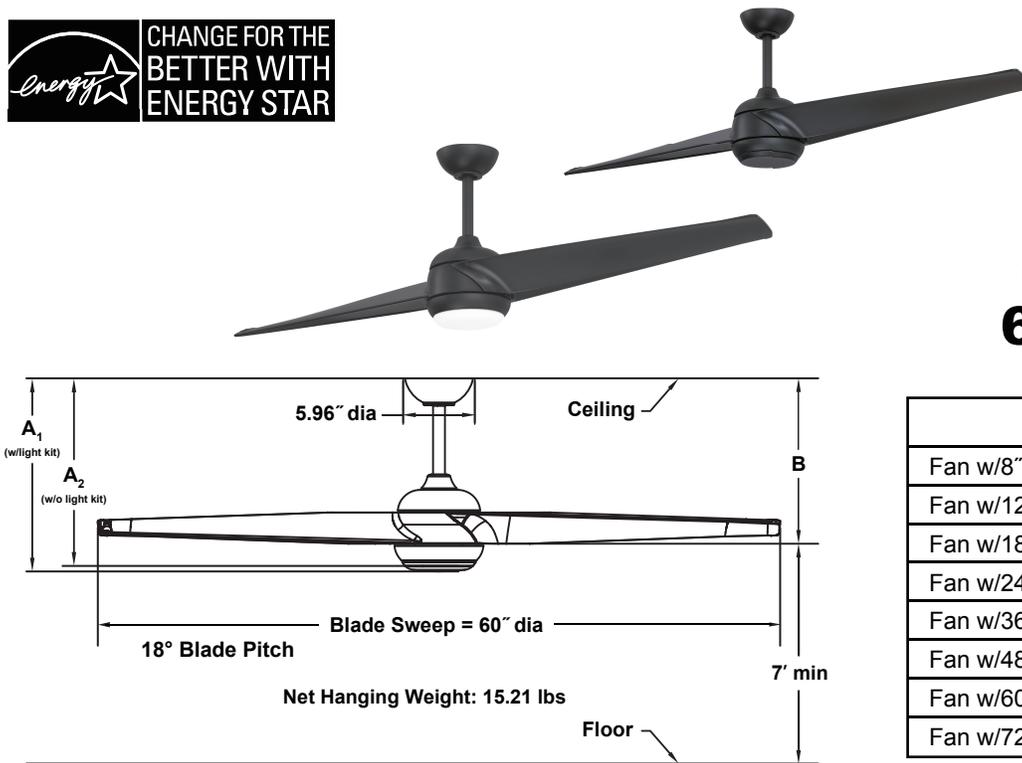

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/8" downrod	16.92"	16.49"	14.48"
Fan w/12" downrod	20.92"	20.49"	18.48"
Fan w/18" downrod	26.92"	26.49"	24.48"
Fan w/24" downrod	32.92"	32.49"	30.48"
Fan w/36" downrod	44.92"	44.49"	42.48"
Fan w/48" downrod	56.92"	56.49"	54.48"
Fan w/60" downrod	68.92"	68.49"	66.48"
Fan w/72" downrod	80.92"	80.49"	78.48"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

DC153-10NS sensorless DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

**BLADE SET:**

A set of two 30" composite blades is included.

**CONTROL OPTIONS:**

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, color temperature, fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

**LIGHTING OPTIONS:**

One 18-watt CCT LED (3000K/4000K/5000K) included.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 8" long downrod (DRT1-8). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

Available Finishes	
LBL	Black with Black Blade and Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	131	5326	164	0.43	33
Med	83	3300	430	0.13	8
Low	30	1136	516	0.04	2

Energy Guide FTC			
Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
21	4223	6	203

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1600	3000/4000/5000	90%