

Hisense

Equivalent to
Previous
60/100
PINTS

DEHUMIDIFIER BUILT-IN PUMP
up to 1500 sq ft coverage

MODEL **DH10020KP1WG**



- Built-in Pump, quick-connect hose included
- 3 Modes – Auto, Continuous, Manual
- 3 Fan Speeds – High, Med, Low



Commercial-power Dehumidification

Perfect for flood damage or very wet large spaces



Built-in Pump for Easy Draining

Built-in pump and Quick-connect water hose included to discharge the water into a sink or basement window



Low Noise Airflow System

Achieves just 49 dB(A) with the fan set on “Low”



Warranty

Two (2) years Parts & Labor

Control Humidity - Helps keep your home conveniently dry, fresh, and quiet

The Hisense DH10020KP1WG 60* Pint 3-Speed Dehumidifier has a built-in pump that can quietly discharge water out a basement window or into a sink using the included quick-connect hose. Reliable and eco-friendly this dehumidifier can operate at temperatures as low as 38°F. Three operating modes (manual set, continuous, and auto dry) and the very low sound level make this a versatile choice. Additional features include a programmable 24-hour on/off timer, adjustable humidistat, and full-tank alert/shut off.

Note:

*: New DOE test procedure, equivalent to previous 100 Pints:

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved

TECHNICAL SPECIFICATIONS

Performance

| | |
|-----------------------------------|------------------|
| Model # | DH10020KP1WG |
| Dehumidification (Pints/24 hours) | 60* |
| Heating Capacity | N/A |
| Coverage | Up to 1500 sq ft |
| Refrigerant | R-410A |
| Noise Level in dB(A) | 49-51 dB(A) |

Electrical

| | |
|-----------------------|--------------------|
| Voltage / Freq / Amps | 115V / 60Hz / 7.0A |
|-----------------------|--------------------|

General Features

| | |
|-----------------------|-------------------------|
| Unit Control Type | Electronic |
| Fan Control | Button |
| Adj. Humidity Control | Yes |
| Display Type | LED |
| Continuous Run | Yes |
| Auto Dry | Yes |
| Manual Setting | 30% ~ 80% |
| Timer-Clock | Yes |
| Fan Speeds | 3 Speeds (HIGH MID LOW) |
| Pump Mode | Yes |

Refrigeration Compartment

| | |
|---------------------------|--------------------------------|
| Auto Bucket Shutoff | Yes |
| Bucket Capacity | 20.1 pints |
| Bucket Shutoff Capacity | 14.8 pints |
| Garden Hose Connection | Yes - garden hose not included |
| Washable Filters | Yes |
| Max Pump Discharge Height | 16 feet (head) |

Accessories

| | |
|--------------------|-------------------------|
| Quick Connect Hose | Yes. included (9mm dia) |
|--------------------|-------------------------|

Approvals

| | |
|--------|-----|
| Safety | ETL |
| Energy | DOE |

Shipping

| | |
|-------------------------------|-----------------|
| Unit Dimension WxDxH (mm) | 474 x 351 x 630 |
| Carton Dimension WxDxH (mm) | 535 x 406 x 665 |
| Net Weight /Gross Weight (kg) | 27.5 / 30.5 |

| | |
|--------------------------------|---------------------|
| Unit Dimension WxDxH (inch) | 18.7 x 13.8 x 24 .8 |
| Carton Dimension WxDxH (inch) | 21.1 x 16.0 x 26.2 |
| Net Weight /Gross Weight (lbs) | 60.6 / 67.2 |
| Loading (40HQJ) | 494 |
| Loading (53') | 624 (floor loaded) |
| Warranty/UPC | |
| Parts & Labor | 2 Years |
| UPC | 819130026848 |

Note:


*: New DOE test procedure, equivalent to previous 100 Pints:

Product Images

Control Panel



Draining hose with Quick Connector(Included)

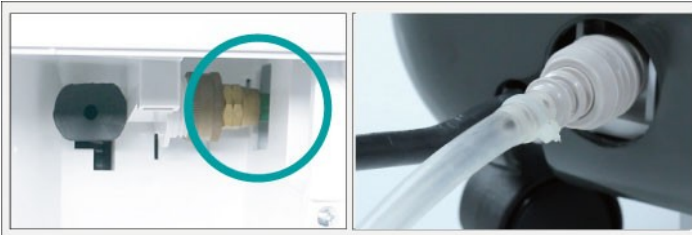

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved



Hisense USA Corporation
7310 McGinnis Ferry Road Suwanee, GA 30024
1-877-465-3566
www.hisense-usa.com