

Care & Maintenance

- 

- Prolonged exposure to rain may cause rusting which can stain floors.
- 

- Do not put hot items directly on furniture surface.
- 

- Do not clean furniture with harsh cleansers or polish.
- 

- To obtain the longest lifespan of your outdoor products, minimizing exposure to direct sunlight is recommended.
- 

- Children should not climb or jump on the furniture.
- 

- Do not write on furniture without a padded barrier to protect the surface.
- 

- To obtain the longest lifespan of your outdoor products, avoid extended and lengthy exposure to rain, snow, and direct sunshine. Whenever possible cover the product and /or place under patio or awnings.
- 

- Not for commercial use. For residential use only.
- 

- Stains may be removed with mild soap solution and damp cloth.
- 


- Keep away from sources of ignition.
- 

- Dust and pick-up spills using a clean, non-colored, lint-free cloth.




Assembly Instructions

Caution: You must read this before you proceed

Single Chair

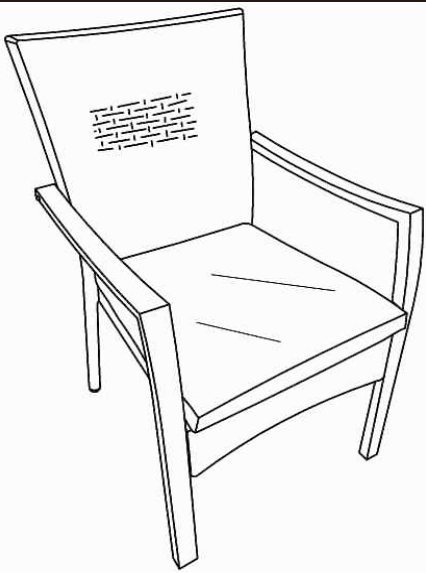


Parts List

Label	Picture	Description	QTY
A		Right Armrest / Leg	1
B		Left Armrest / Leg	1
C		Seat	1
D		Backrest	1
E		Seat Cushion	1


Hardware			
Label	Picture	Description	QTY
①		Allen wrench	1
②		Bolt (M6*25mm)	5
③		Bolt (M6*35mm)	3
④		Bolt (M6*55mm)	3
⑤		Washer	15
6		Bolt (M6*15mm)	3
⑦		PE Cap	3

Assembly Preparation


Before Beginning Assembly:

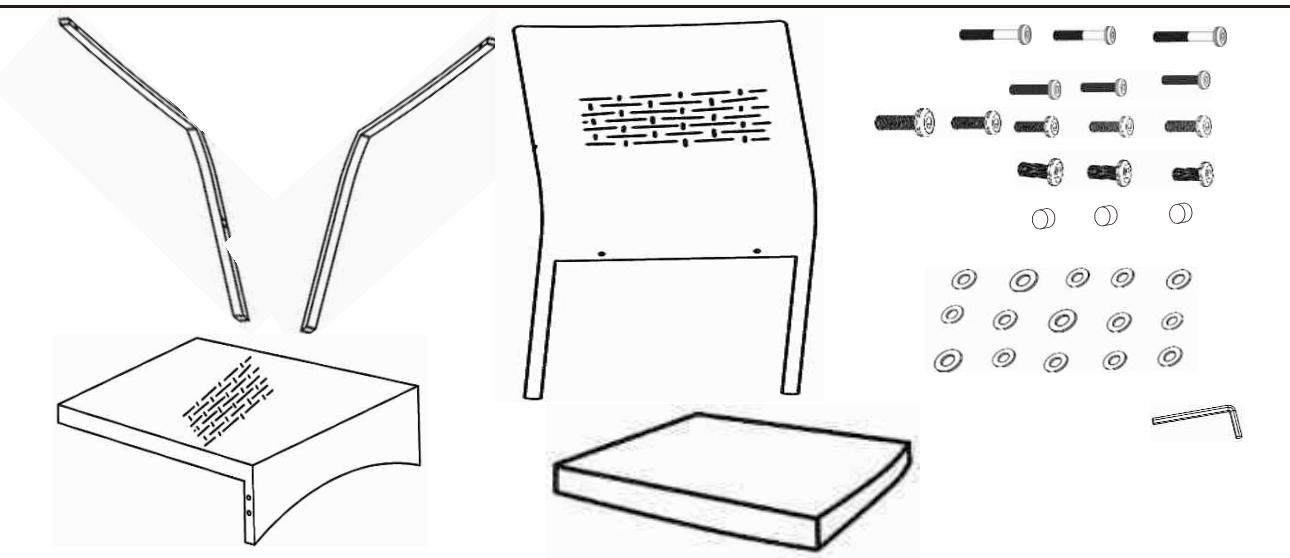

-  Read instructions, cover to cover-
-  Have 2 adults on hand for assembly-
-  Do not assemble on flooring or carpet-
-  Assemble on a clean non-marring surface (packing foam)-
-  Save all packaging until finished-

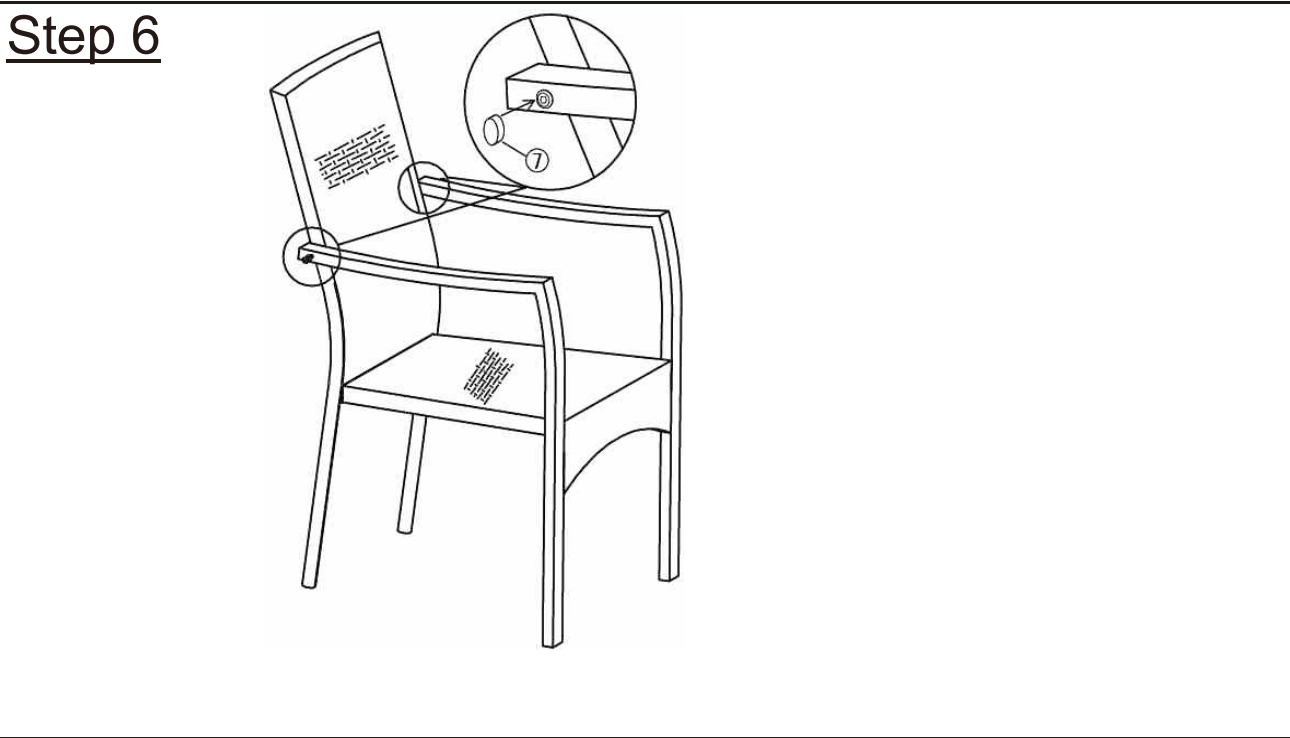


And place PE Caps(⑦) on Bolts as shown.

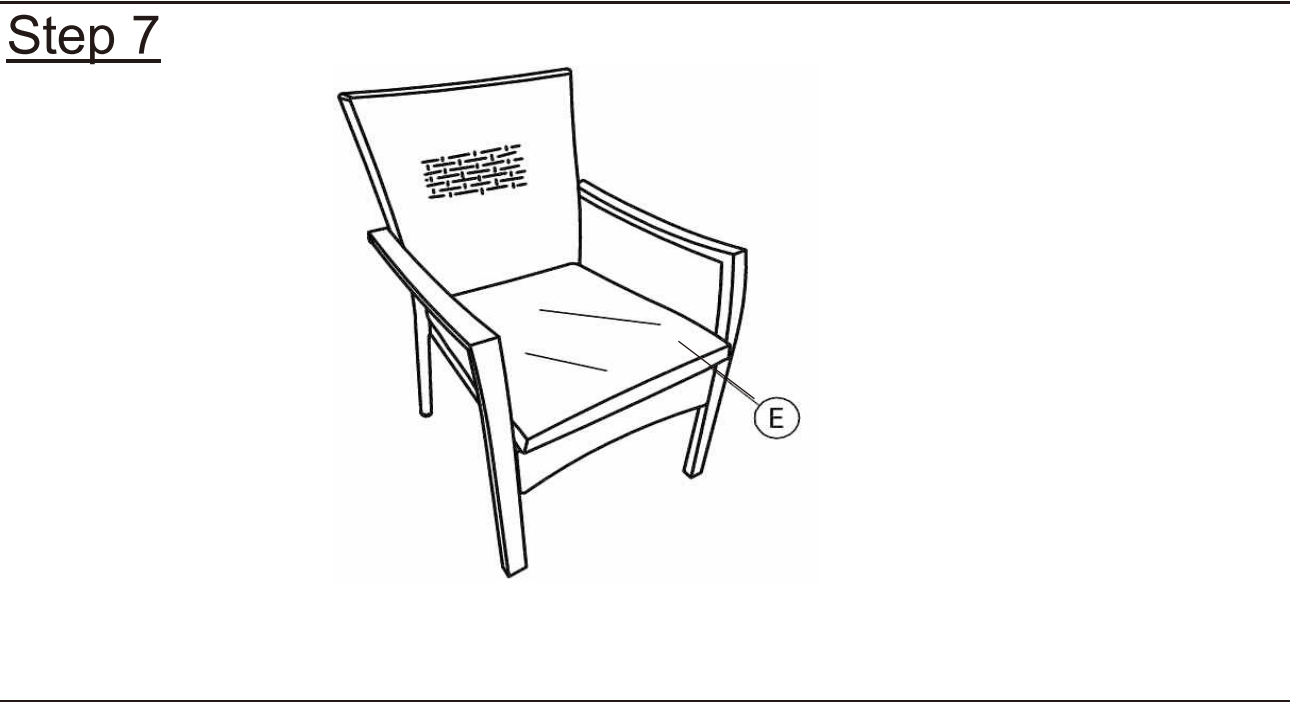


Place the Seat Cushion(E) on the Chair.
Your Single Chair is ready for use.
This Single Chair can only be used on a flat, level surface.

Step 5

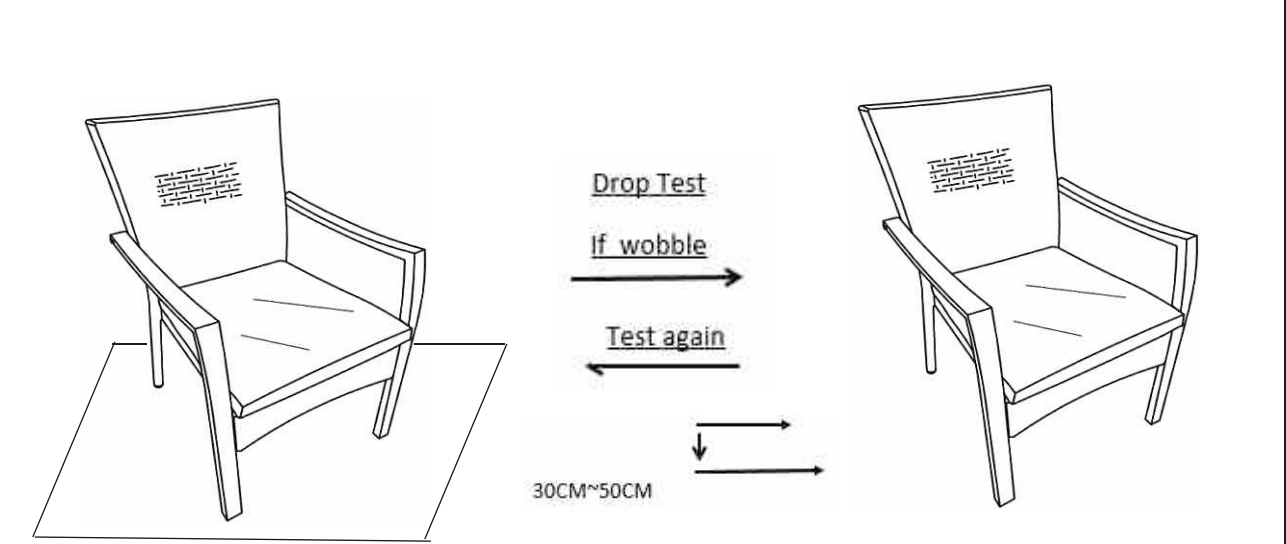

Place the Single Chair on a LEVEL SURFACE to check for wobbles. Check for stability and then tighten all Bolts at all joints.
If it wobbles, lift the Single Chair some 30cm to 50cm high from the ground. Keep your feet and toes well away from the drop zone. Drop the Single Chair freely and vertically with all four legs, hitting the ground, all at the same time.
This Drop Test will help to ensure that all the Bolts and gaps reach full alignment status.
Test again for evenness on a LEVEL SURFACE.
If no wobbles are found, slowly and steadily, place the Single Chair facedown. Then, proceed to tighten all Bolts in a sequential manner.
When tightening the Bolts, tighten sequentially.
DO NOT tighten any Bolt fully and then move on towards the next one.
This could cause the frame to warp. If there are still wobbles, loosen the Bolts and execute the same drop test.
If the Single Chair is not stable, it could lead to damage to the product.


Overview

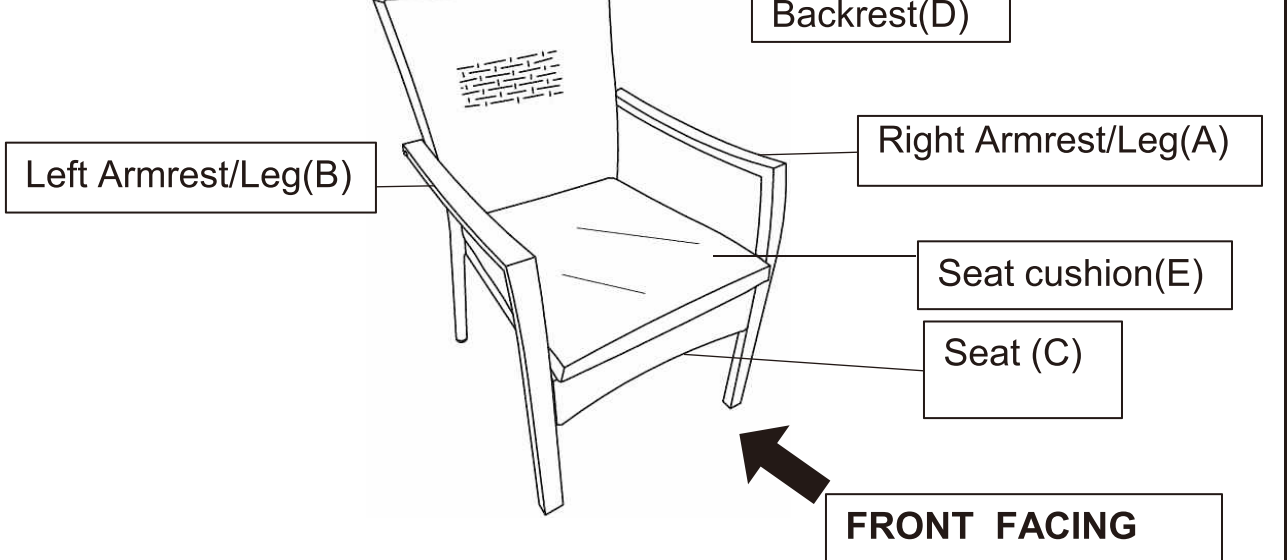

This Single Chair has multiple parts and may require up to 30 minutes to assemble.To give you an overview of the Single Chair parts,the above picture is to help you put the various parts into perspective.Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

Assembly Steps


Step 1

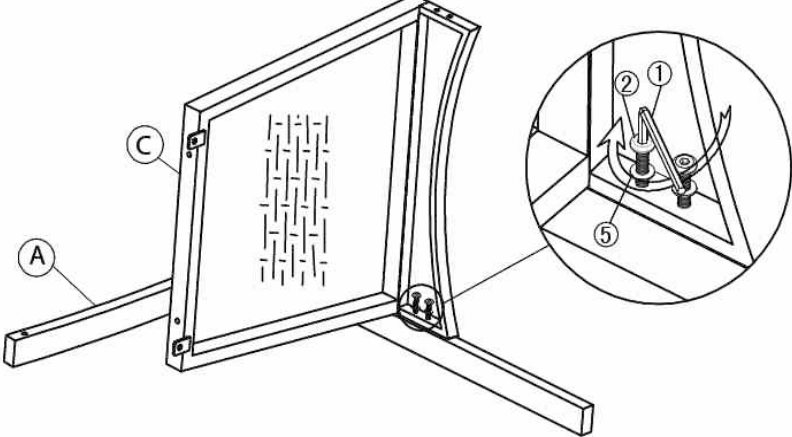

Open the carton and place all the parts on a clean, non-marring surface.
ATTENTION: Occasionally some of the PE Wicker shifts and covers the mounting positions preventing easy assembly. The PE wicker should never be cut, but moved away from the mounting positions.


Attach Right Armrest / Leg(A) to the Seat(C) using Bolts(②) and Washers(⑤) with **Allen wrench**(①) as shown in the picture above.
Do not fully tighten the Bolts.

Step 2

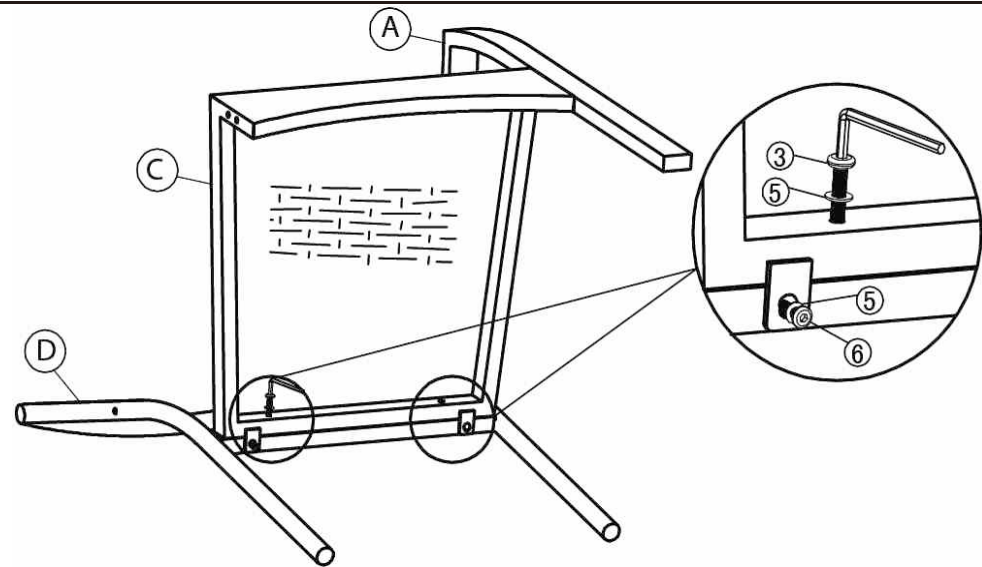


Attach Backrest(D) to Seat(C) using Bolts(③&⑥) and Washers(⑤) with **Allen wrench** (①) as pictured above.
Do not fully tighten the Bolts.

Step 3

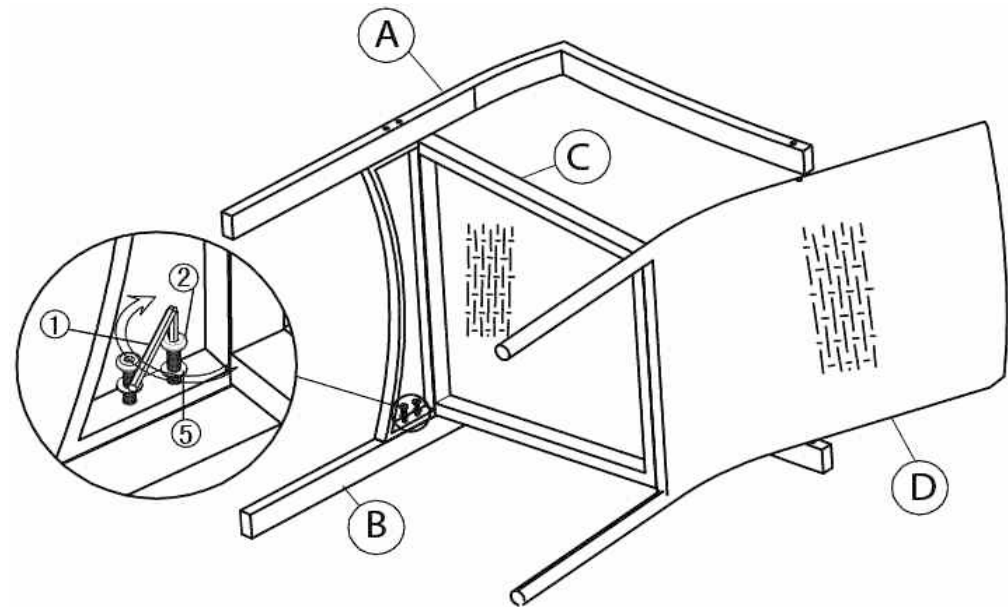

Attach Left Armrest / Leg(B) to Seat(C) using Bolts(②) and Washers(⑤) with **Allen wrench** (①) as shown in the picture above.
Do not fully tighten Bolts.

Step 4

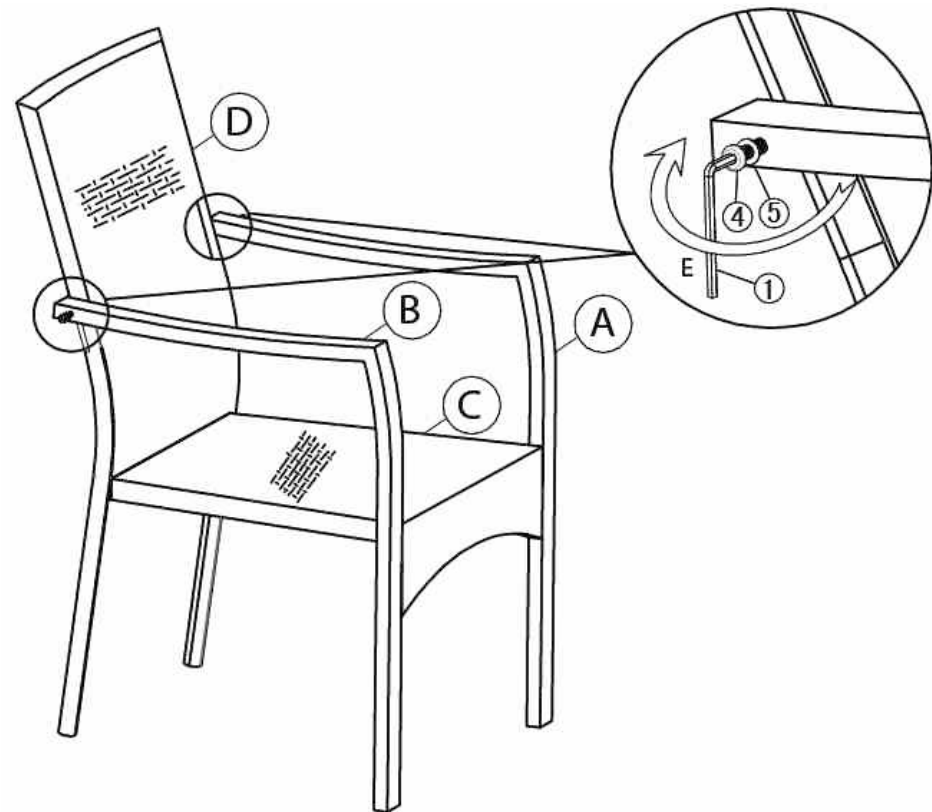

Connect the Armrest(A&B) to Backrest(D) using Washers(⑤) and Bolts(④) with **Allen wrench** (①) as shown in the picture above.
Do not fully tighten the Bolts.