




Parts &.Hardware Included:

Product Model :L6203/400 floor lamp

Picture	Description	Qty	Check list
	Crown beauty	1	A
	Ø100 perforated cover	1	B
	Ø370*170mm Shelving lamp shade	1	C
	Ø16*250 inner teeth rod	1	D
	Ø30*50 light cup With E12 lamp holder	3	E
	Ø100 round pieces	1	F
	Ø100 flying saucer	1	G
	Ø19*800 inner teeth rod	1	H
	Flower branch fastener	1	I
	Ø28*800 inner teeth rod	1	J
	Ø28 single connector	1	K
	Ø150 round pieces	1	L
	Ø350*35 marble lamp holder	1	M
	Ø145*130 iron wire light holder	1	N
	Ø145*130 iron wire light holder	1	P


Lighting structure
explosion diagram

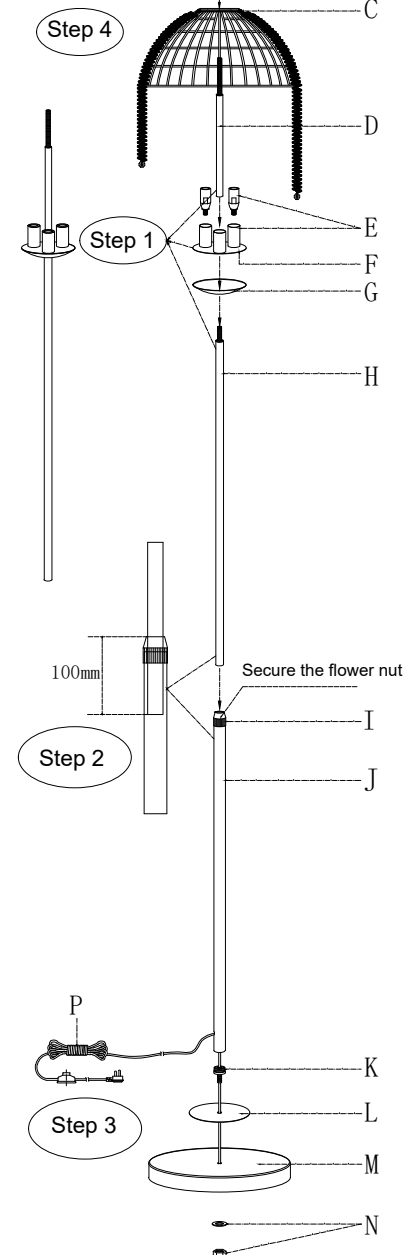

Crystal Installation instructions
1: Put the wire rack on the D rod
On the dental canal, and then use
the hex female lock
Secure the shelf and double the
length
Kinds (18 each) crystal string
staggered
Put it on the shelf and put the lid B
Put it on the canal, then use A
The piece is locked.

Step 4

L6203/400 Floor
lamp

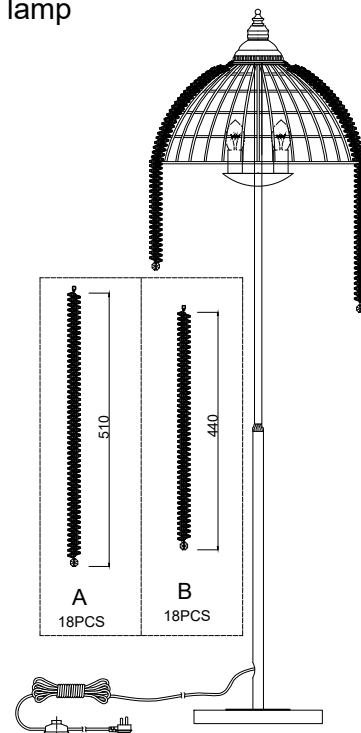

Installation procedure

- Carefully disassemble and identify each part to ensure that you are ready
To install everything, place each part on a clean flat surface, such as a table
Son or floor.
- Cut off the main power supply to the fuse box or circuit breaker in the house or building.
- Installation steps (as prompted on the left)
Step 1: (Install and connect the D-E-F-G-H) accessories.
Step 2: Follow the instructions on the left to install.
Step 3: Connect the marble lamp holder to install and tighten.
Step 4: Install and tighten the shelf crystal cover as prompted.
- Install the light source, connect the power supply, step on the switch on the switch line to test the light.
Save these instructions for future use.
If the lights don't work, you can contact our customer service team
Solve the problem
- Maintenance methods
Clean the water with a soft dry cloth or an electrostatic duster
Avoid using harsh chemicals and abrasives to clean the fixture and smooth the surface
Deal.
- Use safety precautions
Your light is in the water, which will damage the wiring.
- After-sales questions can be contacted on the platform order page
We hope you enjoy your new lighting as much as if your project achieved
Or exceed your expectations, we will be honored if you write us one
A review that shares your experience can help others and other customers get to know you
The idea. To your support like this we make money and we really appreciate it.
- Finger mold and sweat left on the metal and crystal surface of the lamp body after installation
The trace can be cleaned with a soft dry cloth or an electrostatic duster.

Step 2

Height adjustment Instructions (recommended)
Loosen the fixed flower nut counterclockwise first
Then adjust the upper rod down 100mm and then fix it
The flower branches can be tightened clockwise,
of course
Can be adjusted to your preferred height.