



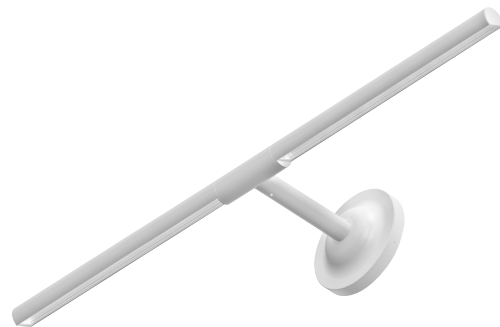

THE TERRACE ACCENT LIGHT

VISUAL & PHOTOMETRIC GUIDE

Introducing innovative SunLike Series technology

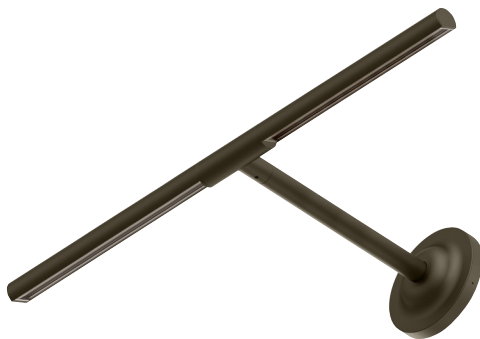

120 VOLT

Step Down transformer is required for higher voltage supply.



INTEGRATED LED

Each energy-efficient fixture is equipped with a fully integrated LED panel and built-in driver.



DIMMABLE

Item is dimmable.




INVISIMOUNT

Indicates fixtures where the mounting hardware is hidden on the back plate.

HINKLEY



INNOVATIVE TECHNOLOGY

Terrace sign lights incorporate cutting-edge **SunLike Series natural spectrum LEDs**, which produce light that closely matches natural sunlight. This innovative technology ensures that any artwork or signage illuminated will appear just as vibrant at night as during the day.

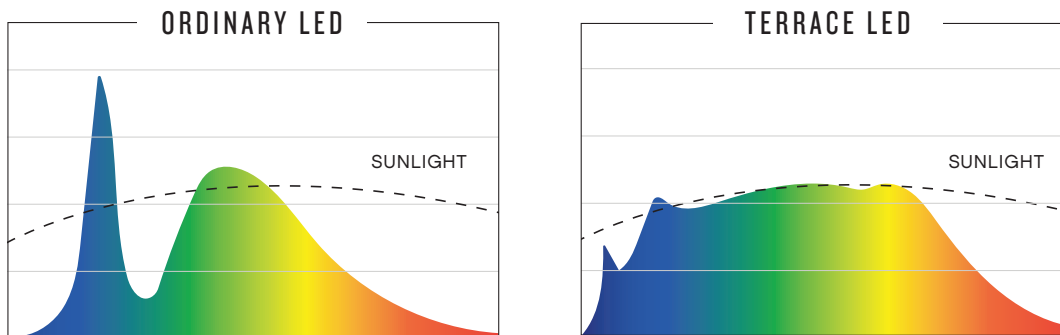

CUSTOMIZABLE AND ADJUSTABLE DESIGN

A linear head that rotates 360° and extension rods included in 6" and 12" lengths support precise adjustments for any application. Fixture is offered in both 16 1/2" and 28 1/2" lengths.

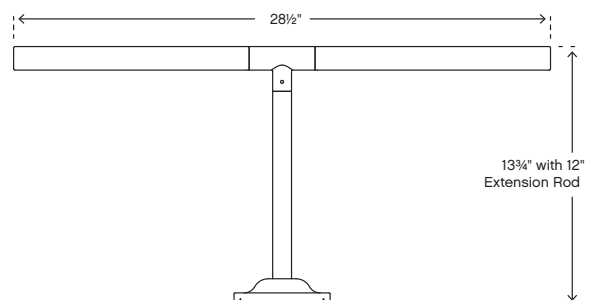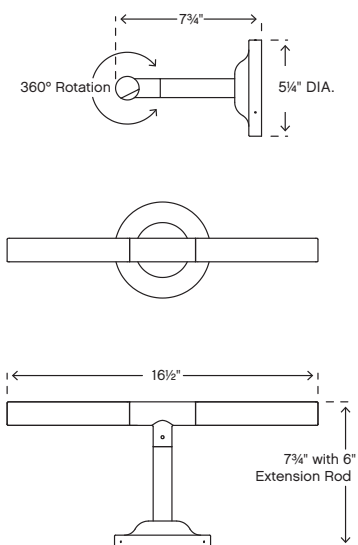

TERRACE™

FINISH: Bronze, Matte White
GLASS: Clear
MATERIAL: Aluminum


Featuring a sleek design, fantastic light pattern and cutting-edge technology, Terrace Sign Lights provide optimal lighting solutions for commercial and residential applications.

Refer to measured footcandle photometrics on the following pages to determine ideal rotation, extension rod length and placement for a specific application. Rated for **floor, wall or ceiling mount** (floor mounting is allowed for interior dry/damp applications only)

SHORT SIGN LIGHT - 15062



15062 BZ
TERRACE SHORT SIGN LIGHT
16½" W, 7¾" H, 6" EXT.
(SHOWN WITH 6" EXT ROD)

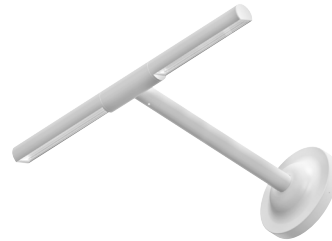


15062 MW
TERRACE SHORT SIGN LIGHT
16½" W, 7¾" H, 12" EXT.
(SHOWN WITH 12" EXT ROD)



LONG SIGN LIGHT - 15063



15063 BZ
TERRACE LONG SIGN LIGHT
28¾" W, 13¾" H, 12" EXT.
(SHOWN WITH 12" EXT ROD)



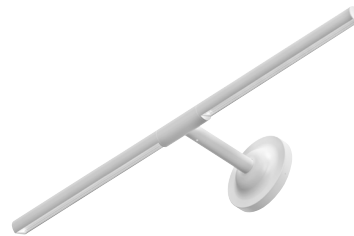


15063 MW
TERRACE LONG SIGN LIGHT
16½" W, 7¾" H, 6" EXT.
(SHOWN WITH 6" EXT ROD)




LED ITEM	LED ENGINE (INCLUDED)	MAX WATTAGE	LUMENS	COLOR TEMP.	HALOGEN EQUIV.	LIFESPAN	FINISH	CONSTRUCTION	BACK PLATE	GLASS	EXT. RODS INCLUDED
15062 BZ	EAL6.5LEDBZ	26w	1200	3000K	2 x 60w	60,000 hrs	Bronze	Aluminum	5¼" Dia. x 1½" D	Clear	1-6", 1-12"
15062 MW	EAL6.5LEDMW	26w	1200	3000K	2 x 60w	60,000 hrs	Matte White	Aluminum	5¼" Dia. x 1½" D	Clear	1-6", 1-12"
15063 BZ	EAL12.5LEDBZ	52w	2400	3000K	2 x 100w	60,000 hrs	Bronze	Aluminum	5¼" Dia. x 1½" D	Clear	1-6", 1-12"
15063 MW	EAL12.5LEDMW	52w	2400	3000K	2 x 100w	60,000 hrs	Matte White	Aluminum	5¼" Dia. x 1½" D	Clear	1-6", 1-12"

A wiring kit is supplied. For complete product details and LED specifications, visit hinkley.com.

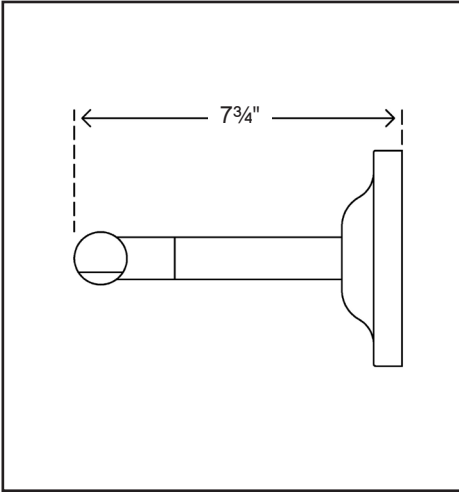
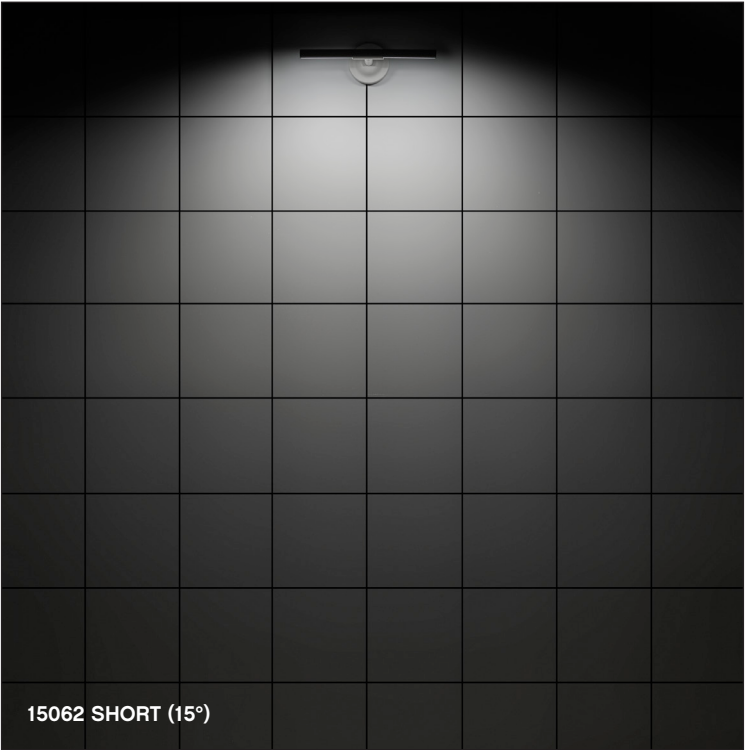
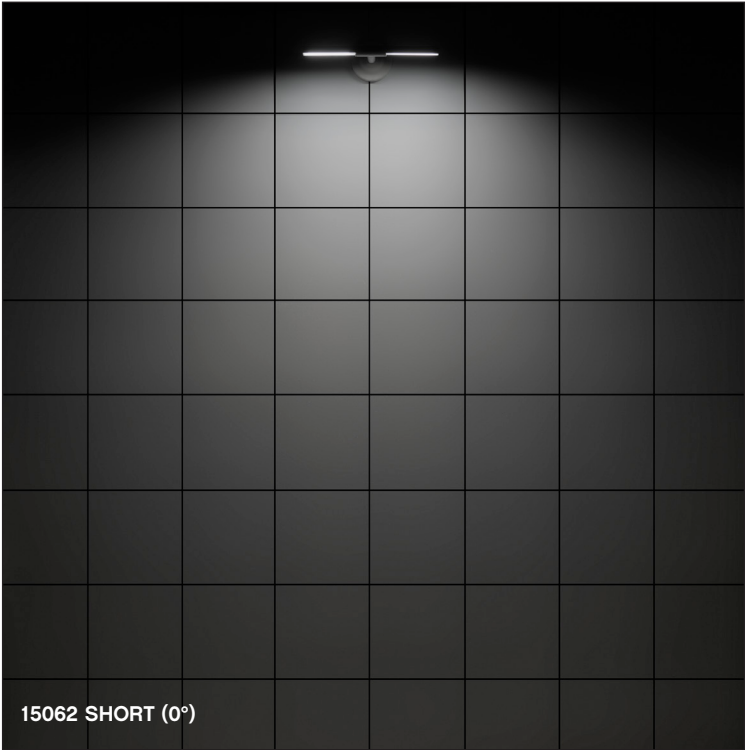


15062 SHORT (0°)					6" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.4	0.7	2.5	30.7	72.0	30.7	2.5	0.7	0.4
18" B	0.8	1.9	5.4	15.7	38.9	15.7	5.4	1.9	0.8
30" B	1.1	2.4	5.9	12.2	16.3	12.2	5.9	2.4	1.1
42" B	0.8	2.2	3.8	8.2	9.9	8.2	3.8	2.2	0.8
54" B	1.7	2.5	3.4	5.3	6.0	5.3	3.4	2.5	1.7
66" B	1.3	1.5	2.6	3.1	3.4	3.1	2.6	1.5	1.3
78" B	1.1	1.7	2.1	2.4	2.6	2.4	2.1	1.7	1.1

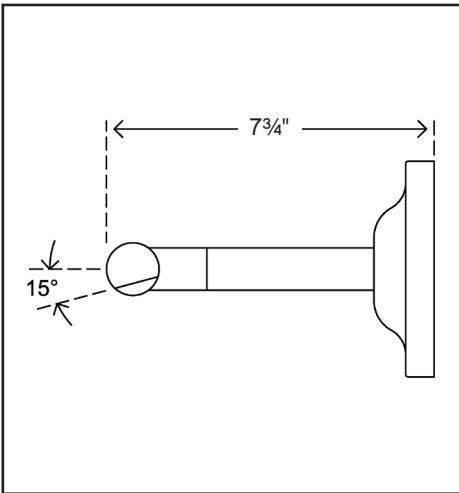


15062 SHORT (15°)					6" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.5	0.8	3.6	42.8	124.4	42.8	3.6	0.8	0.5
18" B	0.7	1.8	9.2	36.5	61.3	36.5	9.2	1.8	0.7
30" B	0.6	2.7	6.6	17.0	22.4	17.0	6.6	2.7	0.6
42" B	1.9	3.7	5.6	9.9	12.0	9.9	5.6	3.7	1.9
54" B	1.2	3.0	3.9	5.6	6.5	5.6	3.9	3.0	1.2
66" B	1.0	1.6	2.3	2.3	2.9	2.3	2.3	1.6	1.0
78" B	1.1	1.9	2.1	2.1	2.4	2.1	2.1	1.9	1.1

Photometric Values Stated in Foot-Candles

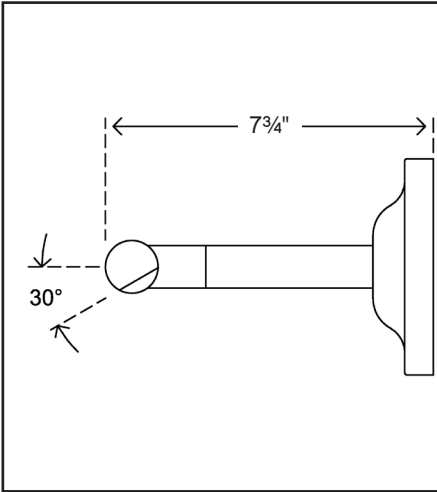
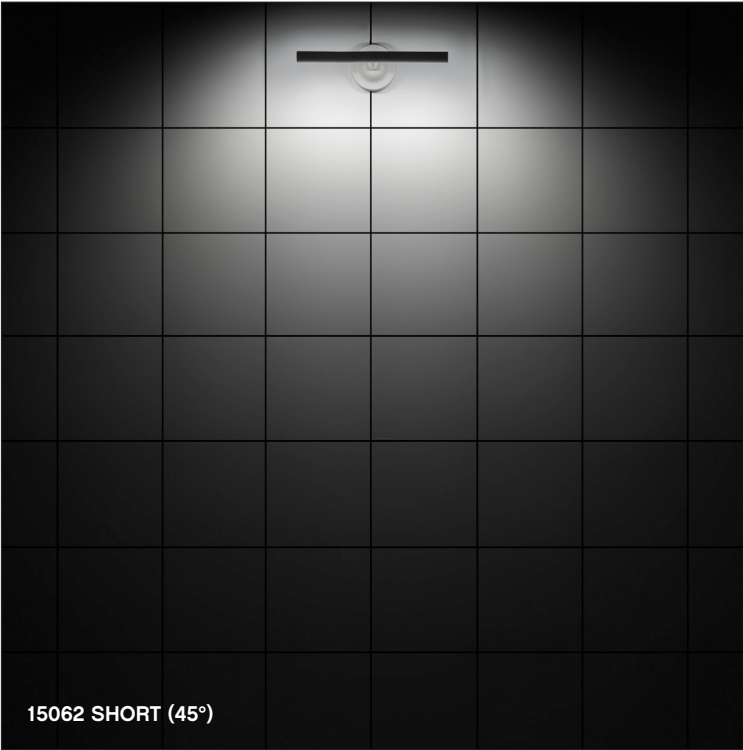
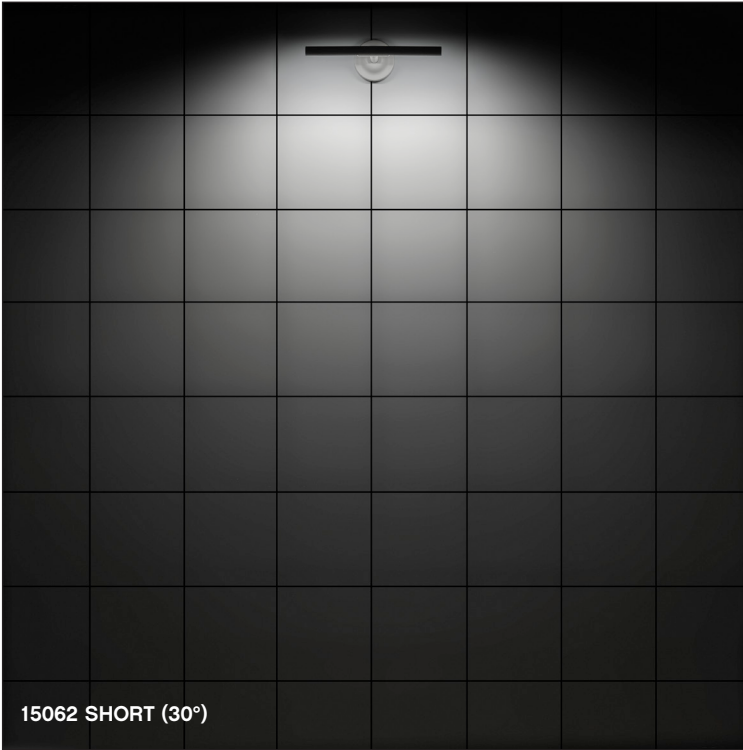


15062 SHORT (30°)					6" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.5	1.0	5.3	123.8	330.1	123.8	5.3	1.0	0.5
18" B	1.1	2.9	10.8	37.1	58.5	37.1	10.8	2.9	1.1
30" B	1.4	3.1	5.2	9.1	13.4	9.1	5.2	3.1	1.4
42" B	1.9	3.1	3.9	5.8	6.3	5.8	3.9	3.1	1.9
54" B	1.3	1.9	2.4	3.3	4.0	3.3	2.4	1.9	1.3
66" B	0.9	1.1	1.6	1.8	2.0	1.8	1.6	1.1	0.9
78" B	0.9	1.2	1.3	1.5	1.6	1.5	1.3	1.2	0.9

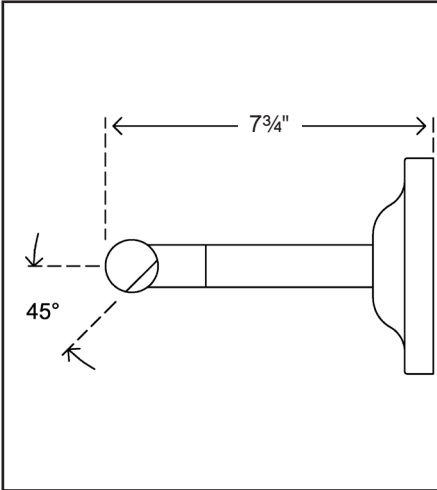


15062 SHORT (45°)					6" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.5	1.1	6.3	136.2	347.0	136.2	6.3	1.1	0.5
18" B	0.8	1.7	7.2	22.1	34.5	22.1	7.2	1.7	0.8
30" B	1.1	1.7	3.2	5.9	7.1	5.9	3.2	1.7	1.1
42" B	0.5	0.7	2.2	2.6	3.4	2.6	2.2	0.7	0.5
54" B	0.9	1.2	1.3	1.8	1.8	1.8	1.3	1.2	0.9
66" B	0.5	0.6	0.8	0.9	1.0	0.9	0.8	0.6	0.5
78" B	0.5	0.7	0.8	0.8	0.8	0.8	0.8	0.7	0.5

Photometric Values Stated in Foot-Candles

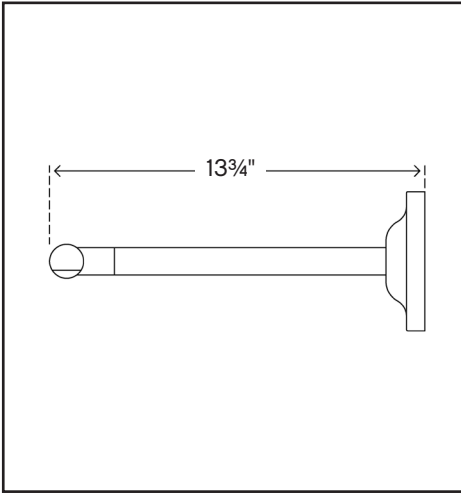
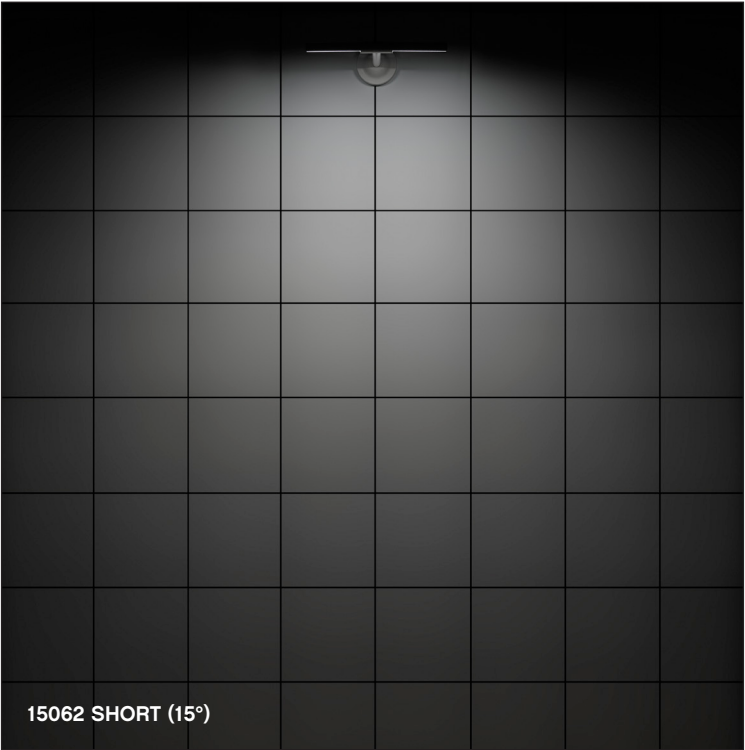
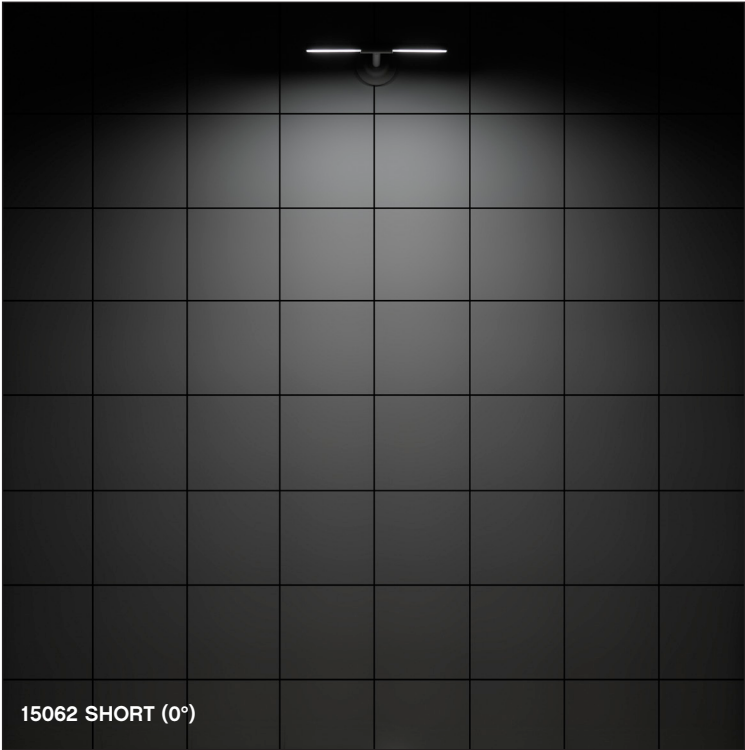


15062 SHORT (0°)					12" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.4	0.7	2.4	11.2	20.9	11.2	2.4	0.7	0.4
18" B	1.1	2.4	6.6	17.4	25.0	17.4	6.6	2.4	1.1
30" B	1.8	3.5	8.0	14.6	18.2	14.6	8.0	3.5	1.8
42" B	1.9	3.7	7.2	11.2	13.1	11.2	7.2	3.7	1.9
54" B	2.0	3.5	5.5	7.7	8.0	7.7	5.5	3.5	2.0
66" B	1.8	2.9	4.2	4.7	6.0	4.7	4.2	2.9	1.8
78" B	1.7	2.7	3.5	3.8	4.2	3.8	3.5	2.7	1.7

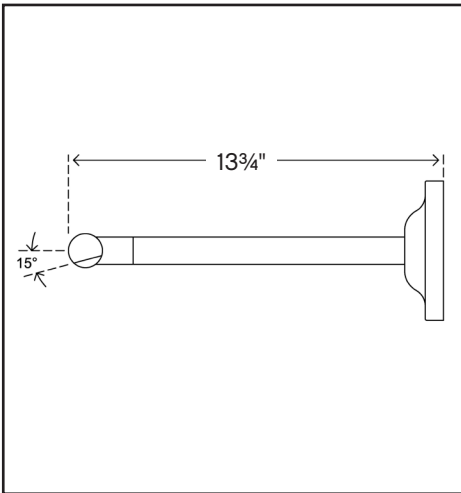


15062 SHORT (15°)					12" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.5	1.2	4.8	23.9	42.0	23.9	4.8	1.2	0.5
18" B	1.3	3.3	10.7	34.0	51.4	34.0	10.7	3.3	1.3
30" B	2.4	4.7	12.2	23.9	31.6	23.9	12.2	4.7	2.4
42" B	3.3	4.8	9.7	15.2	16.9	15.2	9.7	4.8	3.3
54" B	2.1	4.2	6.7	8.7	9.0	8.7	6.7	4.2	2.1
66" B	2.0	3.5	4.5	5.1	5.4	5.1	4.5	3.5	2.0
78" B	1.8	2.8	3.6	4.1	4.4	4.1	3.6	2.8	1.8




Photometric Values Stated in Foot-Candles

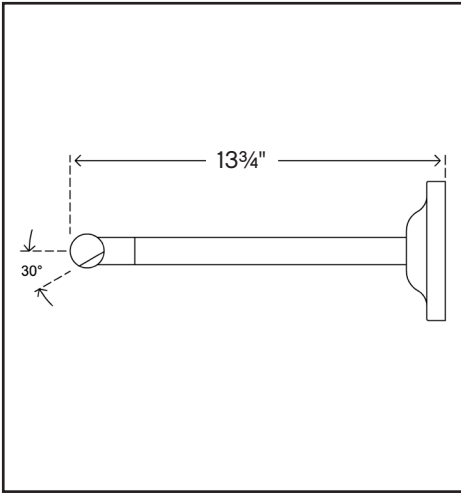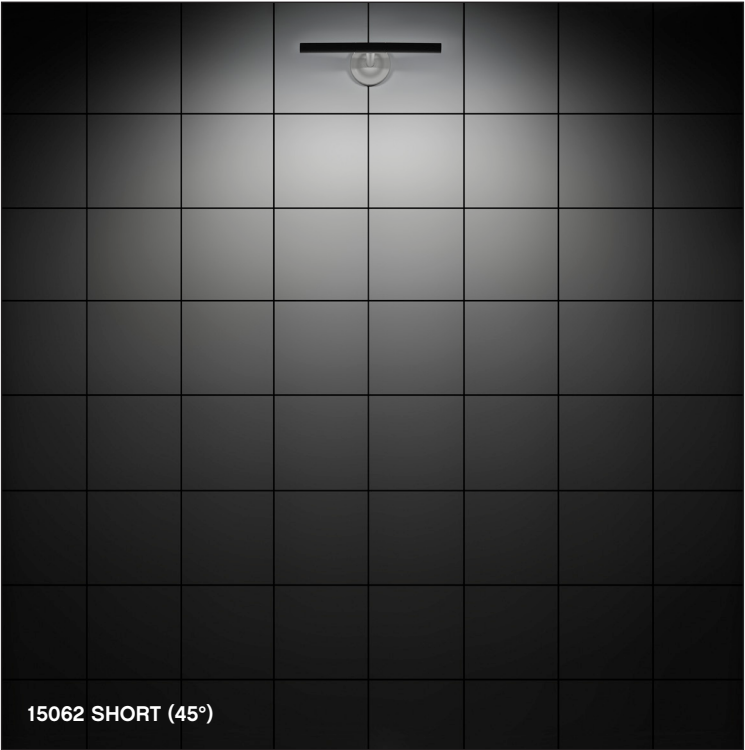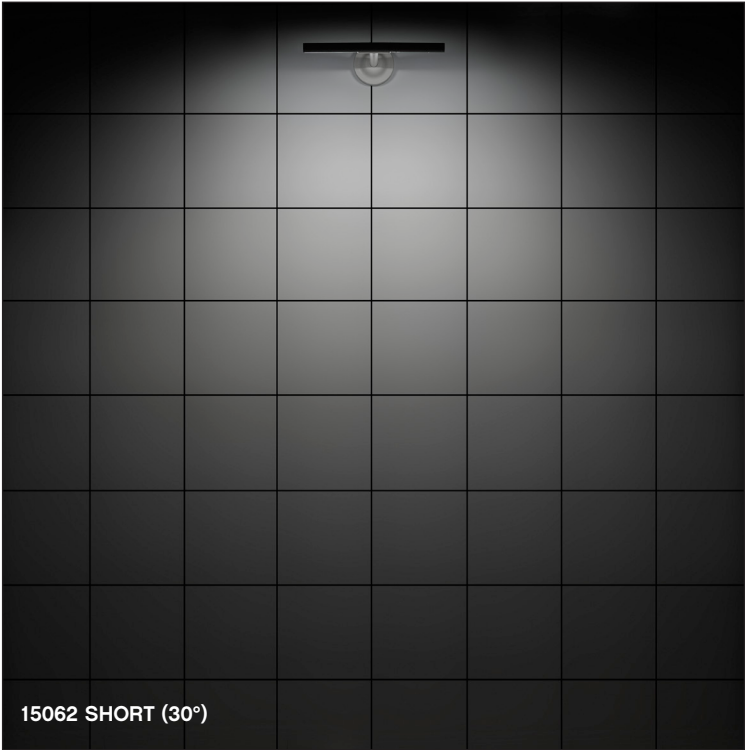


15062 SHORT (30°)					12" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.7	1.9	8.5	43.3	85.0	43.3	8.5	1.9	0.7
18" B	1.6	4.5	18.6	60.8	97.2	60.8	18.6	4.5	1.6
30" B	2.6	6.0	16.0	28.0	33.8	28.0	16.0	6.0	2.6
42" B	2.7	5.3	8.9	12.9	14.7	12.9	8.9	5.3	2.7
54" B	2.4	3.5	5.0	6.1	6.7	6.1	5.0	3.5	2.4
66" B	1.5	2.4	3.0	3.5	4.4	3.5	3.0	2.4	1.5
78" B	1.4	2.0	2.2	2.7	3.0	2.7	2.2	2.0	1.4

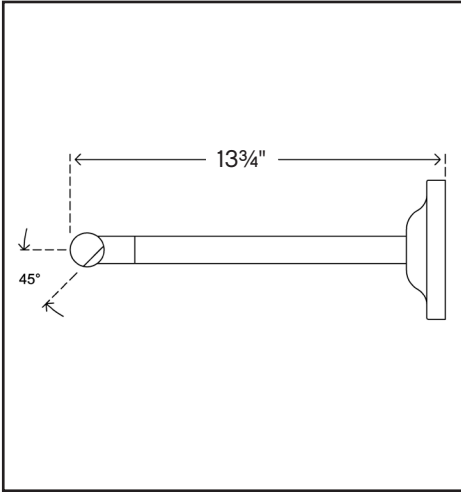




15062 SHORT (45°)					12" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.9	2.6	12.8	85.4	181.1	85.4	12.8	2.6	0.9
18" B	1.9	5.3	20.9	61.4	91.2	61.4	20.9	5.3	1.9
30" B	2.3	5.2	11.7	19.2	22.9	19.2	11.7	5.2	2.3
42" B	2.0	3.7	6.2	8.0	9.3	8.0	6.2	3.7	2.0
54" B	1.5	2.4	3.3	3.8	4.1	3.8	3.3	2.4	1.5
66" B	1.1	1.5	2.2	2.6	2.9	2.6	2.2	1.5	1.1
78" B	1.0	1.3	1.6	1.8	2.0	1.8	1.6	1.3	1.0

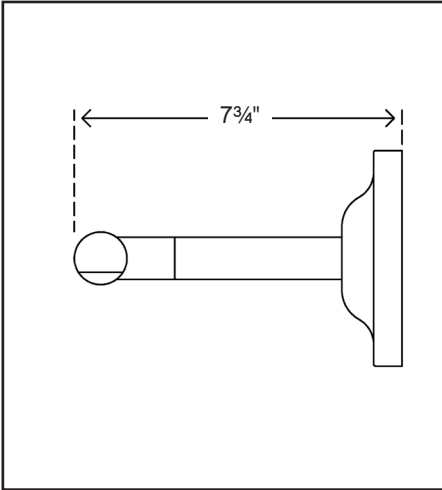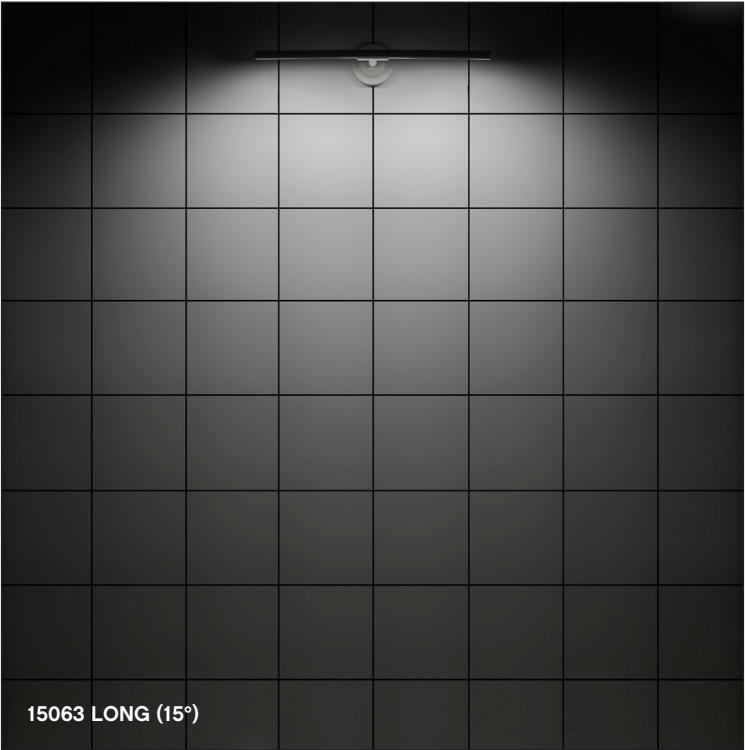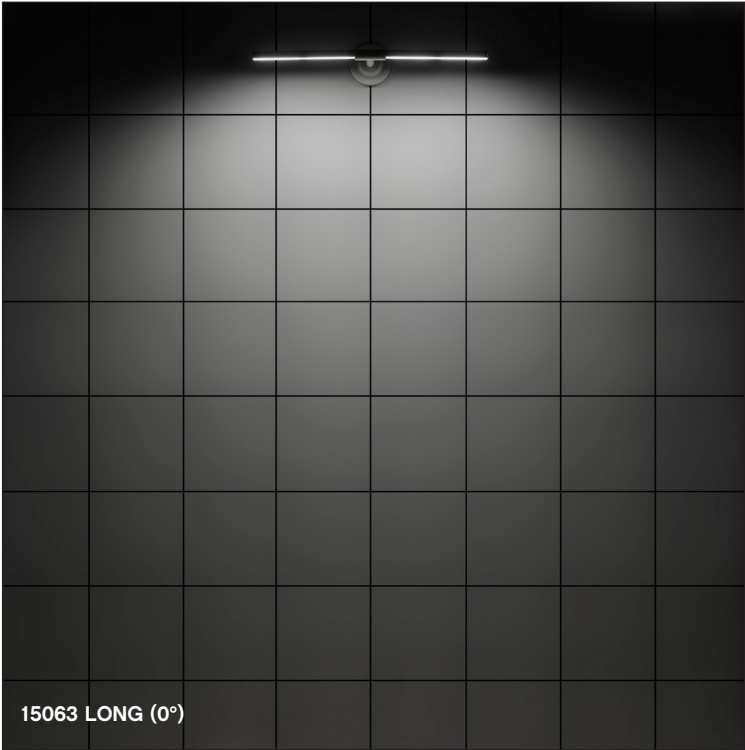


15063 LONG (0°)					6" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.7	1.3	13.2	126.5	136.8	126.5	13.2	1.3	0.7
18" B	2.0	6.1	27.9	65.6	89.0	65.6	27.9	6.1	2.0
30" B	2.7	7.7	18.5	33.1	36.5	33.1	18.5	7.7	2.7
42" B	1.9	5.4	10.7	15.5	18.0	15.5	10.7	5.4	1.9
54" B	2.6	4.8	7.5	9.7	10.5	9.7	7.5	4.8	2.6
66" B	2.2	3.5	5.3	6.1	7.8	6.1	5.3	3.5	2.2
78" B	1.8	2.8	4.1	4.3	5.2	4.3	4.1	2.8	1.8

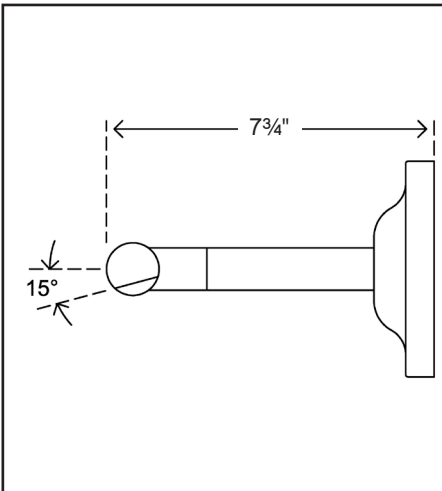



15063 LONG (15°)					6" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.8	2.3	26.6	264.3	293.8	264.3	26.6	2.3	0.8
18" B	2.2	6.8	36.5	85.4	112.0	85.4	36.5	6.8	2.2
30" B	2.4	6.5	15.6	30.9	35.6	30.9	15.6	6.5	2.4
42" B	1.8	5.3	9.7	14.9	18.6	14.9	9.7	5.3	1.8
54" B	1.4	4.2	6.6	8.0	8.5	8.0	6.6	4.2	1.4
66" B	1.5	2.6	3.5	4.5	5.2	4.5	3.5	2.6	1.5
78" B	1.3	2.4	3.1	3.4	3.8	3.4	3.1	2.4	1.3

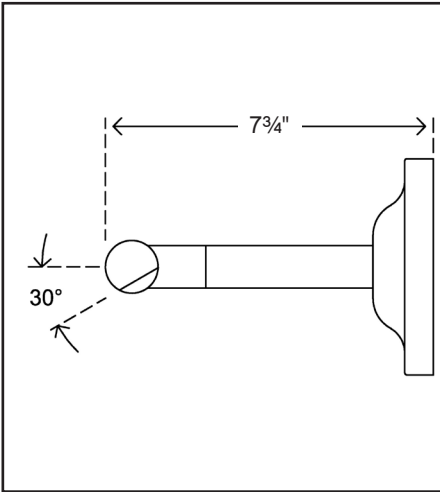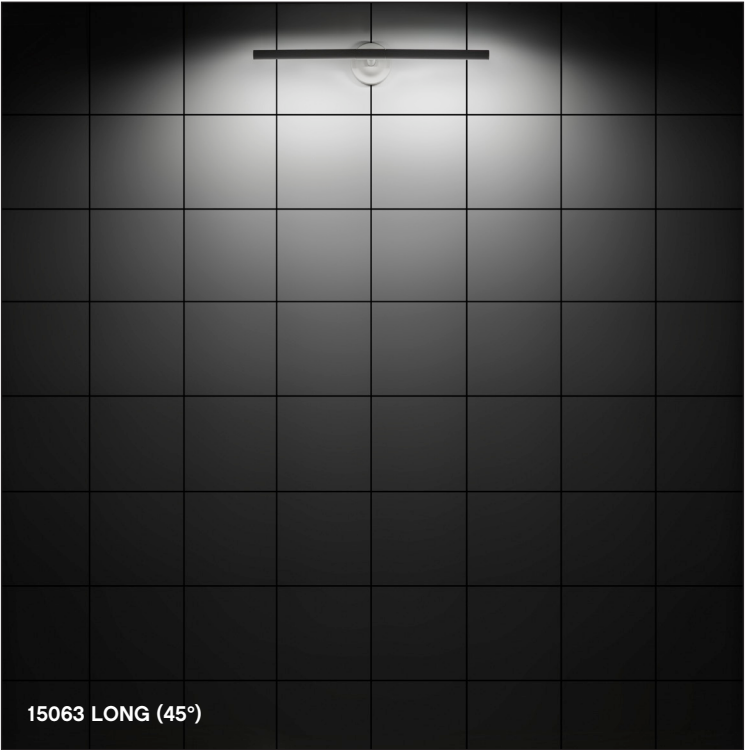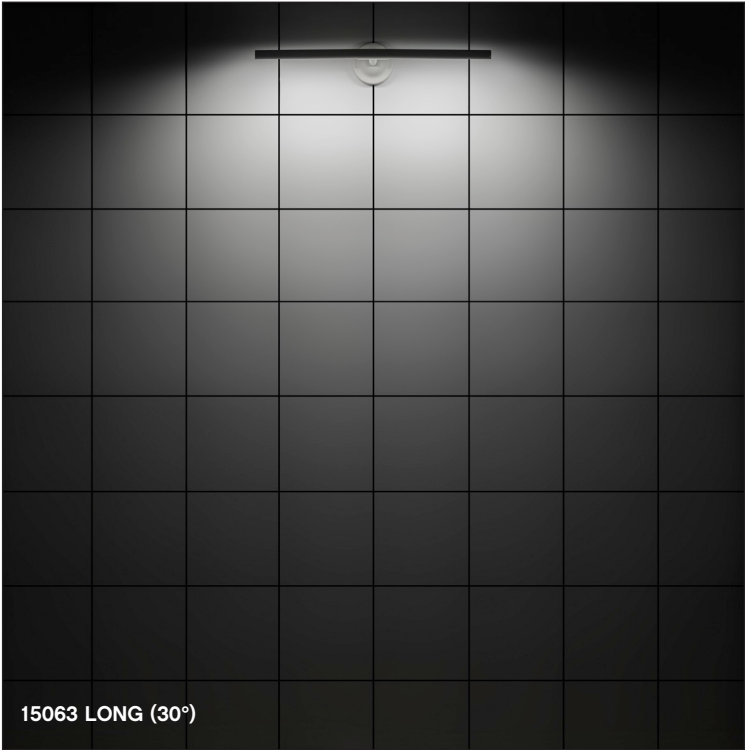


15063 LONG (30°)					6" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	1.1	2.7	34.8	434.0	414.0	434.0	34.8	2.7	1.1
18" B	2.2	5.9	26.6	81.1	100.0	81.1	26.6	5.9	2.2
30" B	2.2	4.8	11.1	20.7	26.0	20.7	11.1	4.8	2.2
42" B	1.7	3.4	6.4	9.0	11.1	9.0	6.4	3.4	1.7
54" B	1.6	2.6	3.8	4.8	5.0	4.8	3.8	2.6	1.6
66" B	1.4	1.9	2.6	2.9	3.4	2.9	2.6	1.9	1.4
78" B	1.2	1.5	2.0	2.4	2.5	2.4	2.0	1.5	1.2

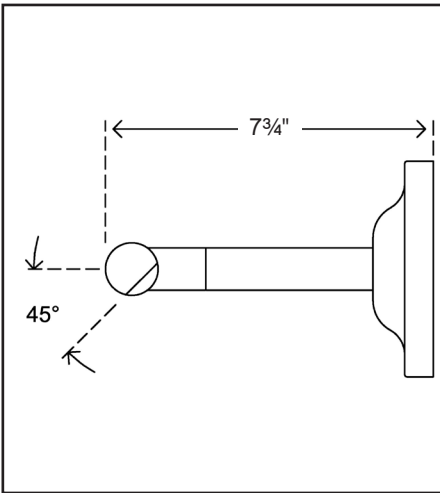




15063 LONG (45°)					6" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	1.0	3.1	36.7	522.0	465.0	522.0	36.7	3.1	1.0
18" B	2.1	3.9	15.4	41.7	49.4	41.7	15.4	3.9	2.1
30" B	1.9	3.4	9.1	15.0	16.8	15.0	9.1	3.4	1.9
42" B	1.3	2.2	3.8	5.3	6.3	5.3	3.8	2.2	1.3
54" B	1.2	1.9	2.7	3.2	3.6	3.2	2.7	1.9	1.2
66" B	0.8	1.4	1.8	2.1	2.4	2.1	1.8	1.4	0.8
78" B	0.7	1.2	1.5	1.7	1.8	1.7	1.5	1.2	0.7

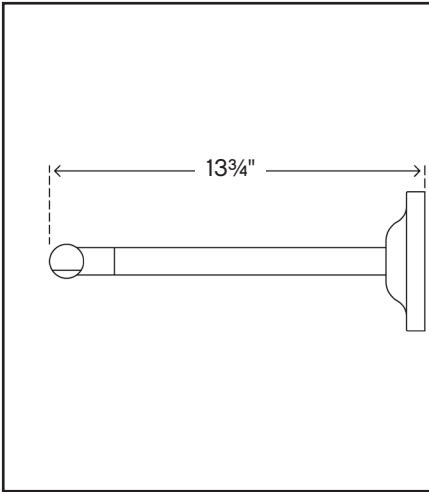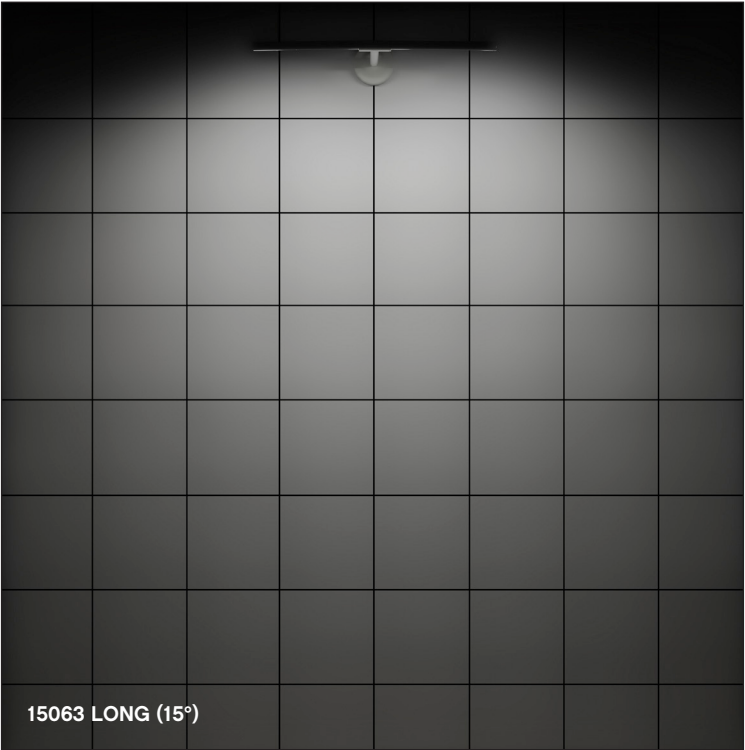


15063 LONG (0°)					12" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	0.7	1.3	7.0	33.6	43.8	33.6	7.0	1.3	0.7
18" B	3.0	7.9	27.2	54.0	70.3	54.0	27.2	7.9	3.0
30" B	5.3	10.8	23.9	36.0	40.1	36.0	23.9	10.8	5.3
42" B	6.2	9.9	17.3	26.1	29.8	26.1	17.3	9.9	6.2
54" B	5.3	10.6	13.6	17.0	18.7	17.0	13.6	10.6	5.3
66" B	5.1	5.3	7.9	9.6	10.2	9.6	7.9	5.3	5.1
78" B	3.5	4.1	6.1	6.9	7.7	6.9	6.1	4.1	3.5

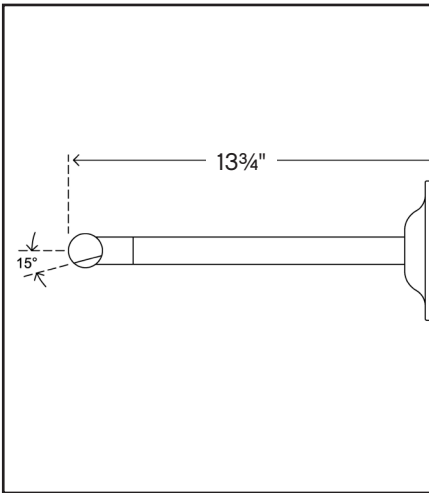

15063 LONG (15°)					12" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	1.3	4.6	19.8	96.1	120.8	96.1	19.8	4.6	1.3
18" B	3.5	12.3	38.9	96.3	124.8	96.3	38.9	12.3	3.5
30" B	5.1	12.5	30.2	49.5	56.1	49.5	30.2	12.5	5.1
42" B	5.5	10.2	20.2	30.0	34.0	30.0	20.2	10.2	5.5
54" B	5.0	8.7	13.7	18.3	20.4	18.3	13.7	8.7	5.0
66" B	4.2	6.0	7.7	9.4	10.6	9.4	7.7	6.0	4.2
78" B	3.2	4.1	5.9	6.4	6.7	6.4	5.9	4.1	3.2

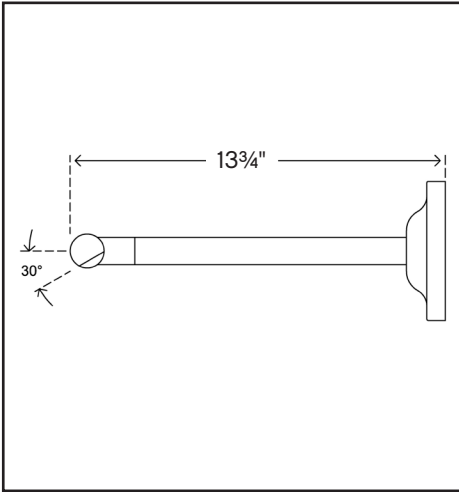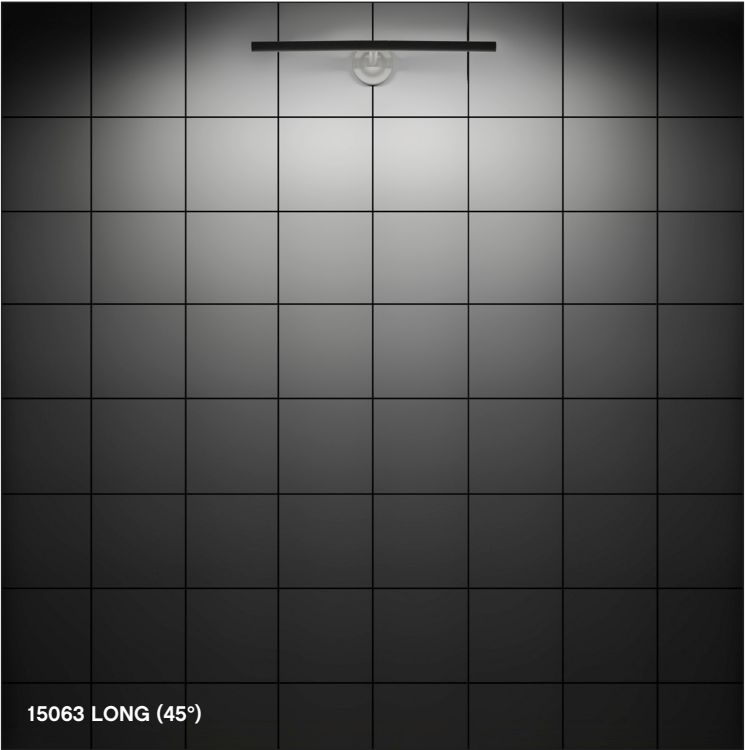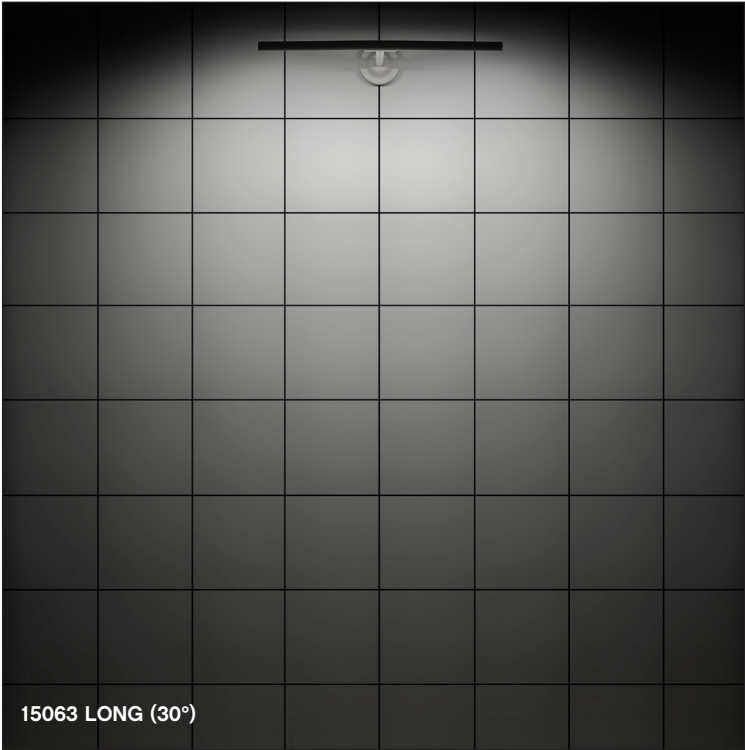

15063 LONG (30°)					12" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	1.7	5.9	38.0	172.5	229.2	172.5	38.0	5.9	1.7
18" B	4.2	11.9	46.2	120.0	147.6	120.0	46.2	11.9	4.2
30" B	5.2	11.1	25.2	37.6	44.5	37.6	25.2	11.1	5.2
42" B	5.0	8.9	14.0	20.0	21.5	20.0	14.0	8.9	5.0
54" B	3.3	5.8	8.9	11.3	12.8	11.3	8.9	5.8	3.3
66" B	3.0	3.8	5.4	5.6	5.9	5.6	5.4	3.8	3.0
78" B	2.3	2.9	3.3	3.8	4.3	3.8	3.3	2.9	2.3

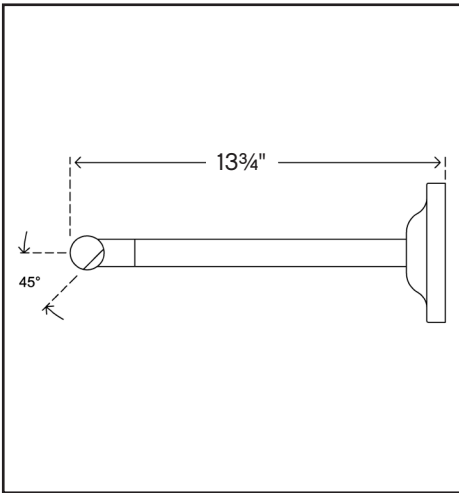

15063 LONG (45°)					12" EXTENSION ROD				
	4' L	3' L	2' L	1' L	CENTER	1' R	2' R	3' R	4' R
6" B	1.9	8.3	61.6	282.2	361.3	282.2	61.6	8.3	1.9
18" B	3.9	10.8	38.2	100.0	127.2	100.0	38.2	10.8	3.9
30" B	3.2	7.4	16.7	29.0	31.4	29.0	16.7	7.4	3.2
42" B	3.1	5.3	9.0	11.9	14.1	11.9	9.0	5.3	3.1
54" B	2.5	4.0	5.8	7.6	8.2	7.6	5.8	4.0	2.5
66" B	1.9	2.8	3.2	3.6	4.0	3.6	3.2	2.8	1.9
78" B	1.6	2.0	2.5	2.6	2.8	2.6	2.5	2.0	1.6

HINKLEY

HINKLEY.COM

GLOBAL HEADQUARTERS

33000 Pin Oak Parkway | Avon Lake, Ohio 44012

T 440 653 5500 | F 440 653 5555 | hinkleylighting.com

SHOWROOMS

Dallas Trade Mart 3210 | Dallas, Texas 75207

High Point Market MS290 | High Point, North Carolina 27260



Connect with us | [#hinkleystyle](https://www.hinkleystyle.com)
