

ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0251

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.























- NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Important to Know

1. Read all instructions carefully before installation and operation.
2. If you are not familiar with state and local electrical codes, it is recommended that you consult with a qualified electrician.
3. Before installation, shut off power at the main fuse or circuit breaker box. Be aware that simply turning off the wall switch is not sufficient to prevent an electrical shock.
4. This fixture requires a 120 VAC, 60 Hz power source.
5. Do not attempt to take the lantern apart; there are no serviceable parts inside.

Maximum Wattage: 100W Incandescent Bulb
Work Temperature: - 4°F~104°F

HARDWARE CONTENTS Note: Hardware not shown actual size.

		Mounting Strip Unit X1			Finial X1
		Mounting Screw X2			Washer X1
		Wire Connector X3			Hex Nut X2
		Ball Nut X2			Rubber Pad X1
		Decorative Cup X1			Metal Pad X1
		Long Threaded Pipe X1			

ProLine
by VAXCEL

⚠ SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING

- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.

CAUTION

- All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.
- Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
- Do not connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. If you are not sure your lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician for information with regards to proper grounding methods as required by the local electrical code in your area.

PREPARATION


Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Tools Required for Assembly (not included): Screwdriver, Phillips Screwdriver, Pliers, Electrical Tape, Wire Cutters, Safety Glasses, Ladder, Wire Stripper.


ASSEMBLY INSTRUCTIONS

Turn off the power at fuse or circuit box.


1. Attach mounting strip unit (AA) to the outlet box using two mounting screws(BB). Adjust the length of long screws on the mounting unit (AA) if necessary.



3. Thread the wires from the fixture through the canopy kit (A), then attach canopy kit (A) to the rod assembly until tight.




2. Rod Connections:
 - a. Processing the iron pipe(C) onto fixture(D).
 - b. Thread the fixture wires and fixture grounding wire from the fixture(A) through the 12"(C), (B), rods in order, and then secure them with the threaded pipes. Finally, secure the rod assembly onto fixture(D) with the threaded pipe.

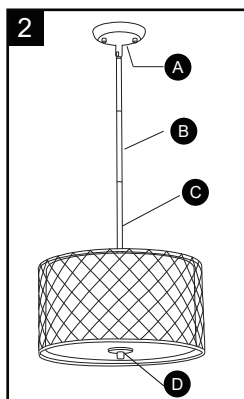

Note: Length adjustable from 27" to 58-7/8". Use fewer rods if shorter length is desired.


4. Install 2X100W Max medium base bulbs (not included).




Bulb Type A Max. 100W
(not included)

ASSEMBLY INSTRUCTIONS (continue)


5. Screw the long threaded pipe (FF) into the coupling, and then secure it with a washer (HH) and a hex nut (II). Attach the glass panel to fixture by inserting the long threaded pipe (FF), and then secure it with a rubber pad (JJ), a metal pad (KK) and a hex nut (II). Slip the decorative cup (EE) up through the long threaded pipe (FF), and secure it with the finial (GG).




7. Attach the canopy to the mounting strip unit (AA), and secure it with two ball nuts (DD).



6. Connect the fixture black wire to the house black wire and the fixture white wire to the house white wire using wire connectors(CC) provided. Connect the copper wire on the light fixture to the mounting unit(AA) by securing it with the preinstalled grounding screw, and then connect it to the house grounding wire with the wire connector(CC).Tuck all the wires into outlet box.

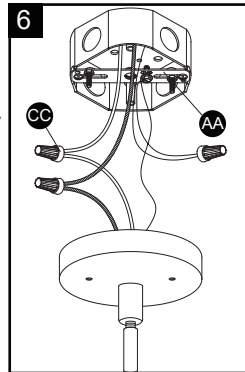

8. Angled mounting recommended for a vaulted or angled ceiling.



Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing. Call toll free at 800-482-9235.

Spare Parts List:

AA	Mounting Strip Unit X1	BB	Mounting Screw X2	→ Assembly Kit 5328MM (1 SET)
CC	Wire Connector X3	DD	Ball Nut X2	
EE	Decorative Cup X1	FF	Long Threaded Pipe X1	→ Assembly Kit 5342AA(1 SET)
GG	Finial X1	HH	Washer X1	
II	Hex Nut X2	JJ	Rubber Pad X1	
KK	Metal Pad X1			

Rod (O) 3033RD (1PC)

Glass Panel 9712TP(1PC)

CARE AND MAINTENANCE

- To clean, turn off and wipe with a damp, non-abrasive cloth.

TROUBLESHOOTING

- 1) **The light does not come on at all:**
 - a) Make sure the wall switch and circuit breaker are on.
 - b) Make sure the wiring is correct.
- 2) **Fuse blows or circuit trips when light is turned on.**
 - a) Check for crossed wires, ensure wiring is correct.

If unable to fix any of the above issues, please consult a certified electrician.