

PHILIPS

Lighting



PAR38 LED

11PAR38/F25/830 ND 120V 6/1

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data


General Information		Wattage Equivalent	
Cap-Base	E26 [Single Contact Medium Screw]	90 W	
Nominal Lifetime (Nom)	10000 h	Starting Time (Nom)	0.5 s
Switching Cycle	50000X	Warm Up Time to 60% Light (Nom)	0.5 s
Technical Type	11-90W	Power Factor (Nom)	0.5
		Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	T-Case Maximum (Nom)	75 °C
Beam Angle (Nom)	25 °		
Initial lumen (Nom)	950 lm	Controls and Dimming	
Luminous Flux (Rated) (Nom)	950 lm	Dimmable	No
Luminous Intensity (Nom)	4085 cd	Approval and Application	
Color Designation	White (WH)	Energy Efficiency Label (EEL)	Not applicable
Rated Beam Angle	25 °	Suitable For Accent Lighting	Yes
Correlated Color Temperature (Nom)	3000 K	Product Data	
Luminous Efficacy (rated) (Nom)	86 lm/W	Order product name	120V PAR38 11W 25D 3000K ND
Color Consistency	<6	EAN/UPC - Product	046677457990
Color Rendering Index (Nom)	80	Order code	457993
LLMF At End Of Nominal Lifetime (Nom)	70 %	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	6
Input Frequency	60 Hz	Material Nr. (12NC)	929001174766
Power (Rated) (Nom)	11 W	Net Weight (Piece)	0.609 kg
Lamp Current (Nom)	170 mA		

PAR38 LED

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005




Dimensional drawing

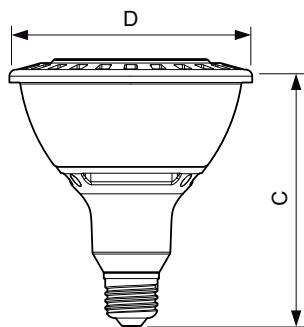

PAR38 120V 11W-90W 25D 3000K E26 ND

Product	D	C
120V PAR38 11W 25D 3000K ND	120 mm	130 mm

Photometric data

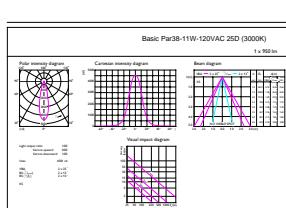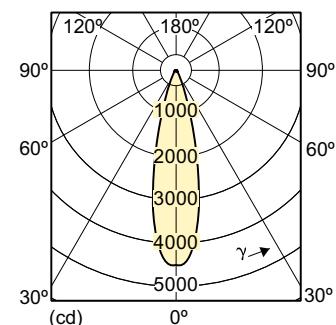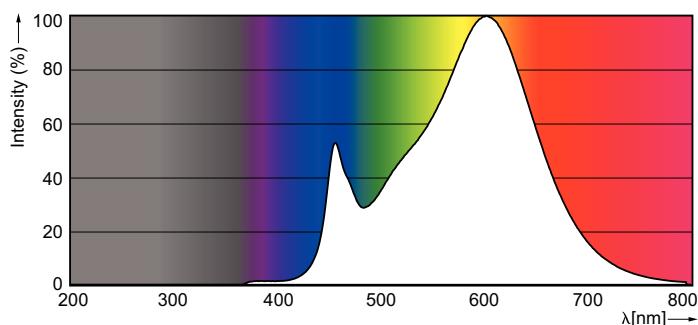

LEDspot, PAR38 11W-90W 950lm 3000K 25D