

## Features

- Premium stainless steel roller design allows for effortless opening and closing of the moving panel
- Controlled Close® innovative soft-close with double-dampening technology eliminates slamming and brings door to a secure close
- Removable center guide for easy cleaning of surrounding surfaces and bottom threshold
- Frameless design emphasizes glass and creates a sleek, minimalist look
- Back-to-back 15-1/8" (384 mm) vertical handles
- Tempered glass ensures enhanced safety and durability
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Smooth, easy-to-clean wall jambs
- Shower door configuration consists of one sliding panel and one stationary panel
- Coordinates with other products in the Premise™ collection

## Material

- Frameless, heavy 5/16" (8 mm) thick Crystal Clear tempered glass
- Anodized aluminum prevents rust and corrosion

## Installation

- Fits opening widths 56-5/8" – 59-5/8" (1438 –1514 mm)
- 61-11/16" (1567 mm) high, with 59-15/16" (1522 mm) minimum head clearance
- 3" (76.2 mm) width adjustment
- 3/8" (10-mm) out-of-plumb adjustability on each side simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- For residential use only
- Not for use in hospitality



## Codes/Standards

ANSI Z97.1  
CAN/CGSB-12.1  
CPSC 16CFR 1201

## KOHLER® Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*


Color	Code	Description
	SHP	Bright Polished Silver
	2MB	Vibrant® Brushed Moderne Brass
	BNK	Anodized Brushed Nickel
	BL	Matte Black

## Available Glass Options

Code	Description
L	Crystal Clear



**Premise™**  
61-3/4" H sliding bath door with 5/16"-thick glass  
**K-702473-8L**

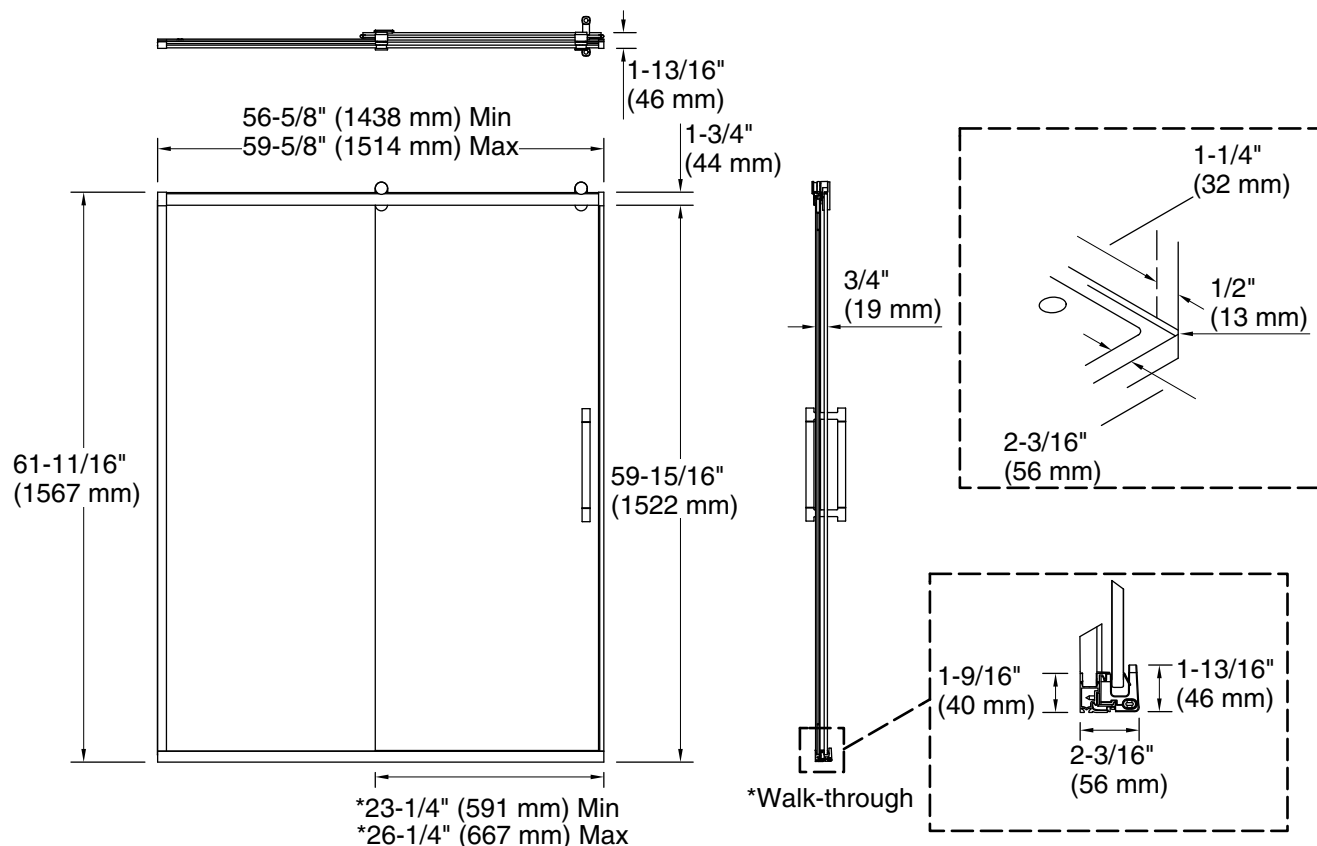

### Technical Information

All product dimensions are nominal.

Base-To-Wall	1/2" (13 mm)
Radius – Max:	
Shower Ledge Min	2-3/16" (56 mm)
Flat:	
Shower Wall Min	1-1/4" (32 mm)
Flat:	

### Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 64-5/8" (1641 mm) to allow for installation clearance.