



Maintenance


- 1) Turn off water supply. Remove plug button (A). Loosen and remove the handle set screw (B), handle (C), collar (D) and nut (E).

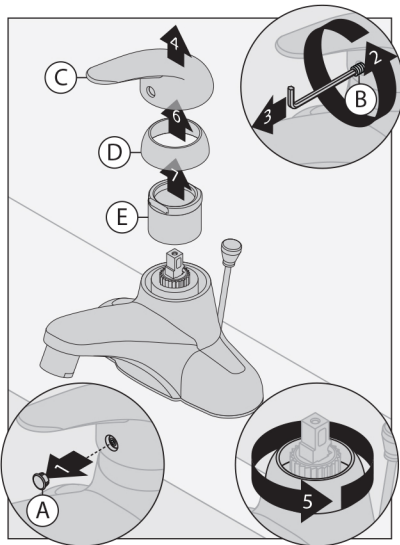

- 2) Remove old cartridge. Correctly align new cartridge (G) and insert into faucet body (H). Install nut (E) and secure collar (D).

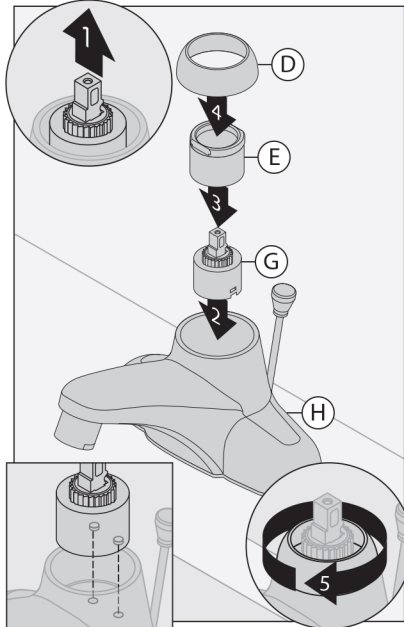

- 3) Replace handle (C) and reinstall set screw (B). Tighten set screw. Reinstall plug button (A).

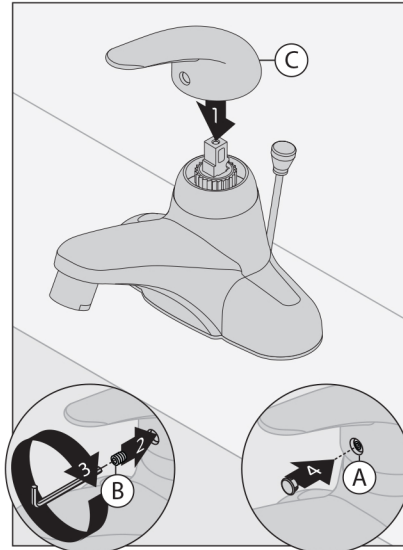

Troubleshooting Chart

Finish is spotting.

Elements in water supply may cause water staining on finish.

Clean finished trim area with a soft cloth using mild soap and water or a non-abrasive cleaner and then quickly rinse with water.