

CLASS FIVE® TOILET K-3575




Features

- Vitreous china
- Elongated bowl
- Class Five® flushing system
- Polished chrome trip lever
- Less seat and supply
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- 11-1/4" (286 mm) x 8-1/4" (210 mm) water area
- 30" (762 mm) x 19-5/8" (498 mm) x 28-1/4" (718 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

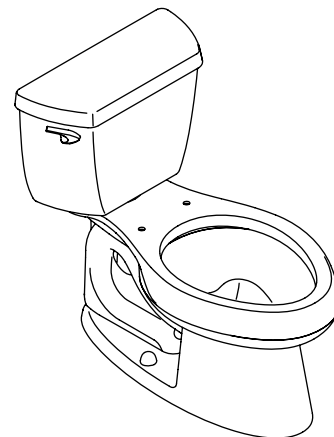

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-3575	Class Five toilet	left-hand	☐ 0	☐ Other_____
K-3575-RA	Class Five toilet	right-hand	☐ 0	☐ Other_____
K-3575-RZ	Class Five toilet with Insuliner® and tank cover locks	right-hand	☐ 0	☐ Other_____
K-3575-T	Class Five toilet with tank cover locks	left-hand	☐ 0	☐ Other_____
K-3575-TR	Class Five toilet with tank cover locks	right-hand	☐ 0	☐ Other_____
K-3575-U	Class Five toilet with Insuliner	left-hand	☐ 0	☐ Other_____
K-3575-UR	Class Five toilet with Insuliner	right-hand	☐ 0	☐ Other_____
K-3575-UT	Class Five toilet with Insuliner and tank cover locks	left-hand	☐ 0	☐ Other_____

Product Specification

The elongated bowl toilet shall be made of vitreous china. Toilet shall be 30" (762 mm) in length, 19-5/8" (498 mm) in width, and 28-1/4" (718 mm) in height with a 11-1/4" (286 mm) x 8-1/4" (210 mm) water area. Toilet shall be 1.28 gpf (4.8 lpf) with Class Five® flushing system. Toilet shall include polished chrome trip lever. Toilet shall have 2-1/8" (54 mm) glazed trapway. Toilet shall be 12" (305 mm) rough-in, less seat and supply. Toilet shall be Kohler Model K-3575-_____-_____-_____.

WELLWORTH®

Recommended Accessories

K-4664	Brevia™ seat with cover	☐ 0	☐ Other_____
K-4688	Cachet® seat with cover	☐ 0	☐ Other_____
K-7637	Angle supply with stop – 3/8" NPT	☐ CP	☐ Other_____

Technical Information


Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (54 mm)
Water area	11-1/4" (286 mm) x 8-1/4" (210 mm)
Water depth from rim	5-1/4" (133 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:

Bowl	K-4198
Tank	K-4436
Tank cover	84591
Trip lever	K-9380
Tank accessory pack	1016548
Bolt cap accessory pack	1013092

Installation Notes

Install this product according to the installation guide.

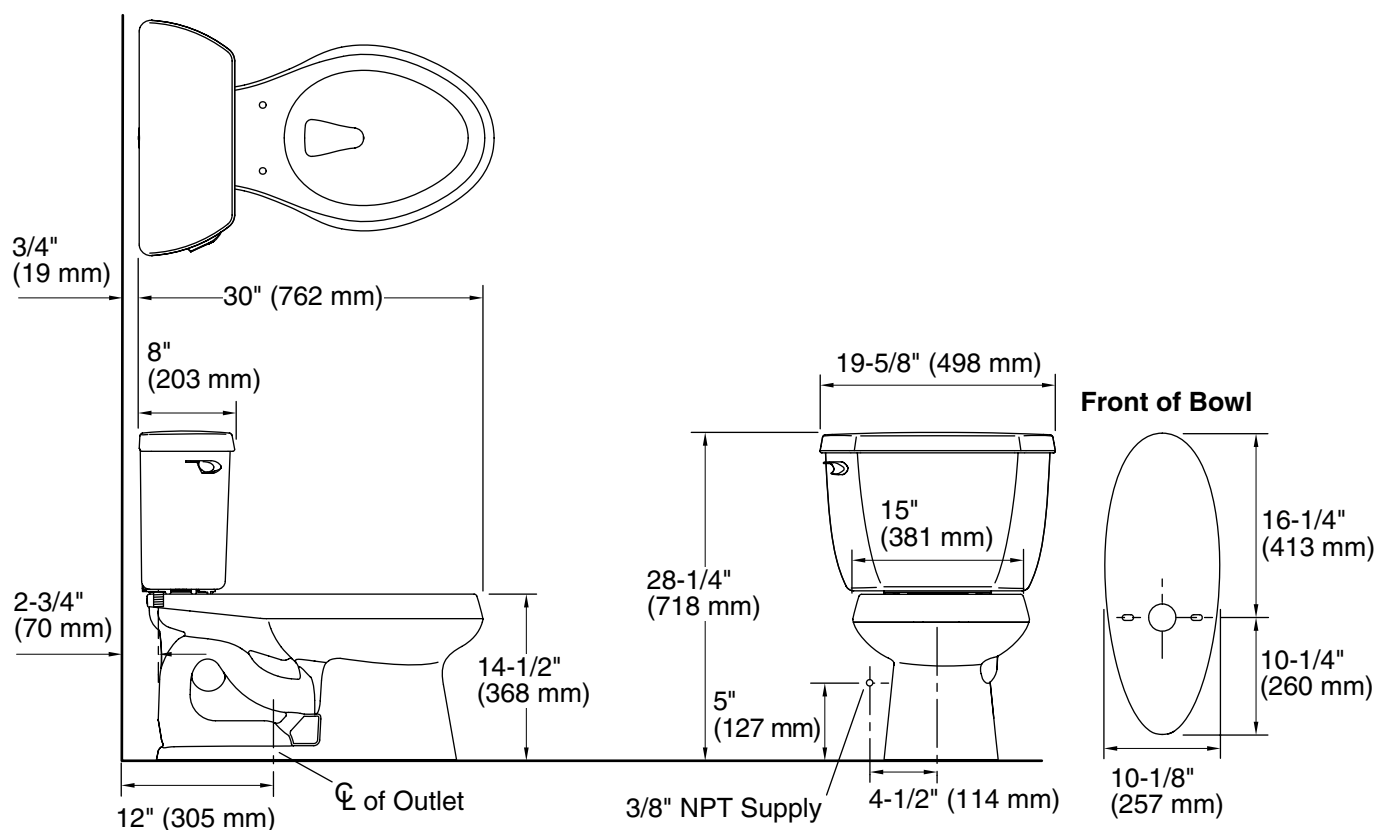

Product Diagram