


GUIDE D'INSTALLATION GUÍA DE INSTALACIÓN

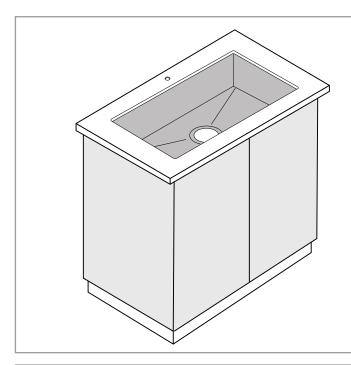

• ENGLISH

INSTALLATION GUIDE UNDERMOUNT

• FRANÇAIS GUIDE D'INSTALLATION ENCASTRÉ

• ESPAÑOL
GUÍA DE INSTALACIÓN
EMPOTRADO BAJO LA CUBIERTA
DE GABINETE


PAGE 2 - 3

6 - 7

4 - 5

### **Mounting System**

Système de montage Sistema de Montaie

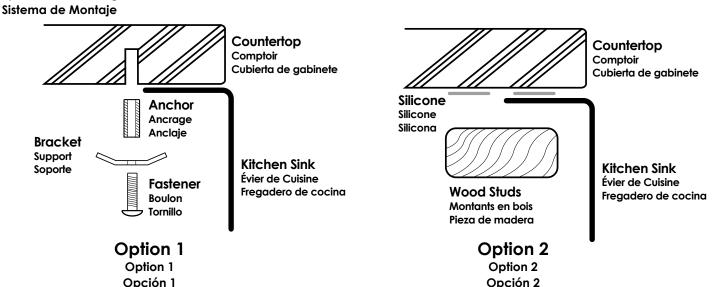

THANK YOU FOR CHOOSING STYLISH® We work hard to provide innovative and beautiful designs that last and delight your home.

We would love to hear from you. Tell us what you think of the product by leaving a review through the dealer where you have purchased this product.

Your feedback is important for our continuous improvement and will also let other customers make the correct choice.

Stylish International Inc.

www.stylishkb.com

m [

stylish.international.inc



+1-855-789-5352



STAINLESS STEEL KITCHEN SINK

IF YOU HAVE PURCHASED A **UNDERMOUNT SINK**, PLEASE MAKE SURE TO READ THESE INSTRUCTIONS CAREFULLY

### Prior to installation:


Make sure that you have all necessary parts by checking the parts list. If any part is missing, please contact Stylish® Customer Service at +1-855-789-5352 for a replacement.

Inspect the sink prior to installation to make sure that it has not been damaged during shipping.


You may use the cut-out template provided or download DXF file from www.stylishkb.com, the file is available under each sink model.

Observe all plumbing and building codes according to your state requirements.

Not recommended to be installed with laminate countertop.

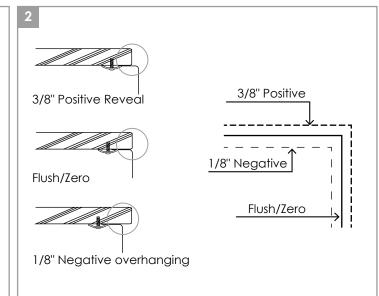


Use scissors to cut along the line of the paper template for you desired reveal type (Negative, Positive or Flush Reveal)



Place cut-out template in desired position on countertop locating center of the bowl over cabinet.

> Note: Sink installation is normally performed by the countertop provider.



according to templated outline using appropriate cutting tools. Template is for guide only. Use physical sink to ensure accurate cut-out opening. It is recommended to use the actual sink dimensions to ensure the most accurate cut out. Drawing or template are for reference.

For additional technical assistance or for any questions or concerns about your kitchen sink's warranty, please contact us.

### www.stylishkb.com/warranty

www.stylishkb.com

are@stylishkb.com

+1-855-789-5352

Stylish International Inc.
















STAINLESS STEEL KITCHEN SINK

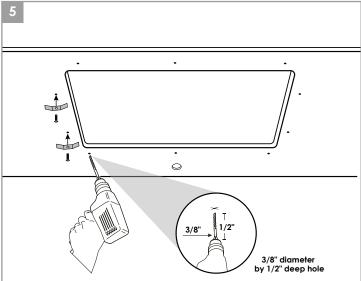


Drill holes on the underside of the countertop, approximately 1/2" from edge of the sink to be installed. Holes should be evenly spaced approximately 6" to 8" apart starting from every corner as shown below.




Option 1. Insert anchors under the countertop on the drilled holes, so they are ready to fasten the sink flange. Anchors should be inserted with a hammer until flush.



**Option 2.** Alternatively wood studs combined with silicone caulk can be used to hold sink against countertop without using mounting brackets.

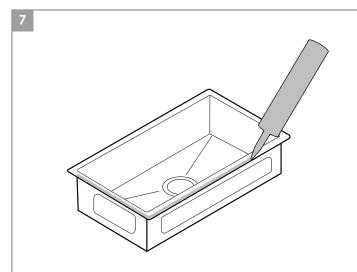

Clean sink flange and underside of cut-out area of countertop, making sure that the area is smooth and free of debris. Apply continuous bead of silicone caulk evenly on top of sink flange.



Check alignment of sink again and tighten fasteners to secure sink. Wipe away excess silicone caulk with damp cloth. Connect drain and water supply according to manufacturer's instruction.

Note: If sink is installed using **Option 2** it will require special means to hold sink in place while adhesive silicone cures.

- 1. Rinse the sink with water.
- 2. Coat the sink with baking soda, Flitz or Barkeepers friend.
- 3. With sponge, scrub all sink walls in the direction of the steel grain.
- 4. Spray on undiluted vinegar.

- 5. Rinse again.
- 6. Buff with a few drops of olive oil.
- 7. If necessary, repeat procedure.
- 8. We recommend the use of a stainless steel bottom grid that will protect the sink from scratches that could be caused by the utensils and pots.

Stylish International Inc.










Page 3



**GUIDE D'INSTALLATION GUÍA DE INSTALACIÓN** 

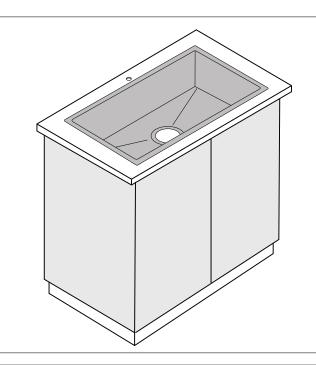

**PAGE**  ENGLISH 2 - 3


INSTALLATION GUIDE DROP-IN

 FRANÇAIS 4 - 5 GUIDÉ D'INSTALLATION SOUS LE COMPTOIR


• ESPAÑOL 6 - 7 GUÍA DE INSTALACIÓN EMPOTRADO SOBRE LA CUBIERTA DE GABINETE

### Mounting System - Type A Système de montage - Type A

Sistema de Montaje - Tipo A



Kitchen Sink Évier de Cuisine Fregadero de cocina



Mounting clip bolt insert into sink side bracket Clip de montage insérer le boulon dans support côté évier Inserte el tornillo del clip de montaje en soporte lateral del fregadero

THANK YOU FOR CHOOSING **STYLISH®** 

We work hard to provide innovative and beautiful designs that last and delight your home.

We would love to hear from you. Tell us what you think of the product by leaving a review through the dealer where you have purchased this product.

Your feedback is important for our continuous improvement and will also let other customers make the correct choice.

Stylish International Inc.



www.stylishkb.com



stylish.international.inc



@care@stylishkb.com





STAINLESS STEEL KITCHEN SINK

IF YOU HAVE PURCHASED A **DROP-IN SINK**, PLEASE MAKE SURE TO READ THESE INSTRUCTIONS CAREFULLY


### Prior to installation:

Make sure that you have all necessary parts by checking the parts list. If any part is missing, please contact Stylish® Customer Service at +1-855-789-5352 for a replacement.


Inspect the sink prior to installation to make sure that it has not been damaged during shipping.

You may use the cut-out template provided or download DXF file from www.stylishkb.com, the file is available under each sink model.


Observe all plumbing and building codes according to your state requirements.



Place cut-out template in desired position on countertop locating center of the bowl over cabinet.



Trace the outline of the template and cut countertop according to templated outline using appropriate cutting tools. Template is for guide only. Use physical sink to ensure accurate cut-out opening.



Clean sink flange and underside of cut-out area of countertop, making sure that the area is smooth and free of debris. Apply continuous bead of silicone.

For additional technical assistance or for any questions or concerns about your kitchen sink's warranty, please contact us.

www.stylishkb.com/warranty

www.stylishkb.com

are@stylishkb.com

+1-855-789-5352


Stylish International Inc.








STAINLESS STEEL KITCHEN SINK

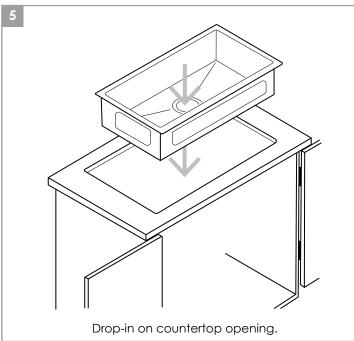

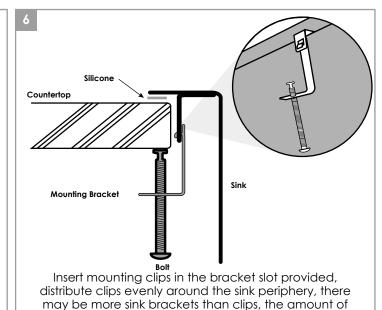

clips provided are enough to provide optimal sink clamping to countertop.

Check alignment of sink again and tighten fasteners to secure sink. Wipe away excess silicone caulk with damp cloth. Connect drain and water supply according to manufacturer's instruction.

- 1. Rinse the sink with water.
- 2. Coat the sink with baking soda, Flitz or Barkeepers friend.
- 3. With sponge, scrub all sink walls in the direction of the steel grain.
- 4. Spray on undiluted vinegar.

- 5. Rinse again.
- 6. Buff with a few drops of olive oil.
- 7. If necessary, repeat procedure.
- 8. We recommend the use of a stainless steel bottom grid that will protect the sink from scratches that could be caused by the utensils and pots.

Stylish International Inc.







@ care@stylishkb.com



Page 3