



Location:

# SYMMONS® Identity™

the smart choice™

6705-TRM, 6705TRMTC  
Shower/Hand Shower Trim  
Specification Submittal



## Feature Highlights

- Identity Shower/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Requires Symmons Dual Outlet Diverter Valve
- Metal lever handles
- Cradle for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- 1 mode hand shower wand with easy to clean nozzles
- 1 mode showerhead with easy to clean nozzles
- 2.5 gpm (9.5 L/min) flow restrictors
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 6705TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

## Model Numbers

- 6705-TRM**  
Shower/Hand Shower Trim,  
Temptrol Pressure Balancing Shower Valve and  
Symmons Dual Outlet Diverter valve ordered separately
- 6705TRMTC**  
Shower/Hand Shower Trim with TA-10 flow control spindle and  
T-12A cap assembly, must order Temptrol valve with Test Cap

## Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense @ 1.5 gpm and 2.0 gpm  
(does not apply to L3 modification)



## Warranty


**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**5 Years** - for industrial/commercial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.  
Go to [www.symmons.com/register](http://www.symmons.com/register) to register your Symmons product.

## Options/Modifications

- 1.5**  1.5 gpm (5.7 L/min) flow restrictor
- 2.0** 2.0 gpm (7.6 L/min) flow restrictor
- 72** 72" hose in place of 60" hose
- L1** Less showerhead
- L2** Less hand shower wand
- L3** Less showerhead & hand shower wand
- L4** Less showerhead, shower arm & flange
- L5** Less hand shower system  
(less bar/cradle, hose, wand & elbow)
- L7** Less handle
- R** 60" white vinyl hose in place of 60" metal hose
- VP** Vandal resistant escutcheon screws in place of standard screws
- STN** Satin Nickel finish

**Note:** Append appropriate -suffix to model number.

## Dimensions

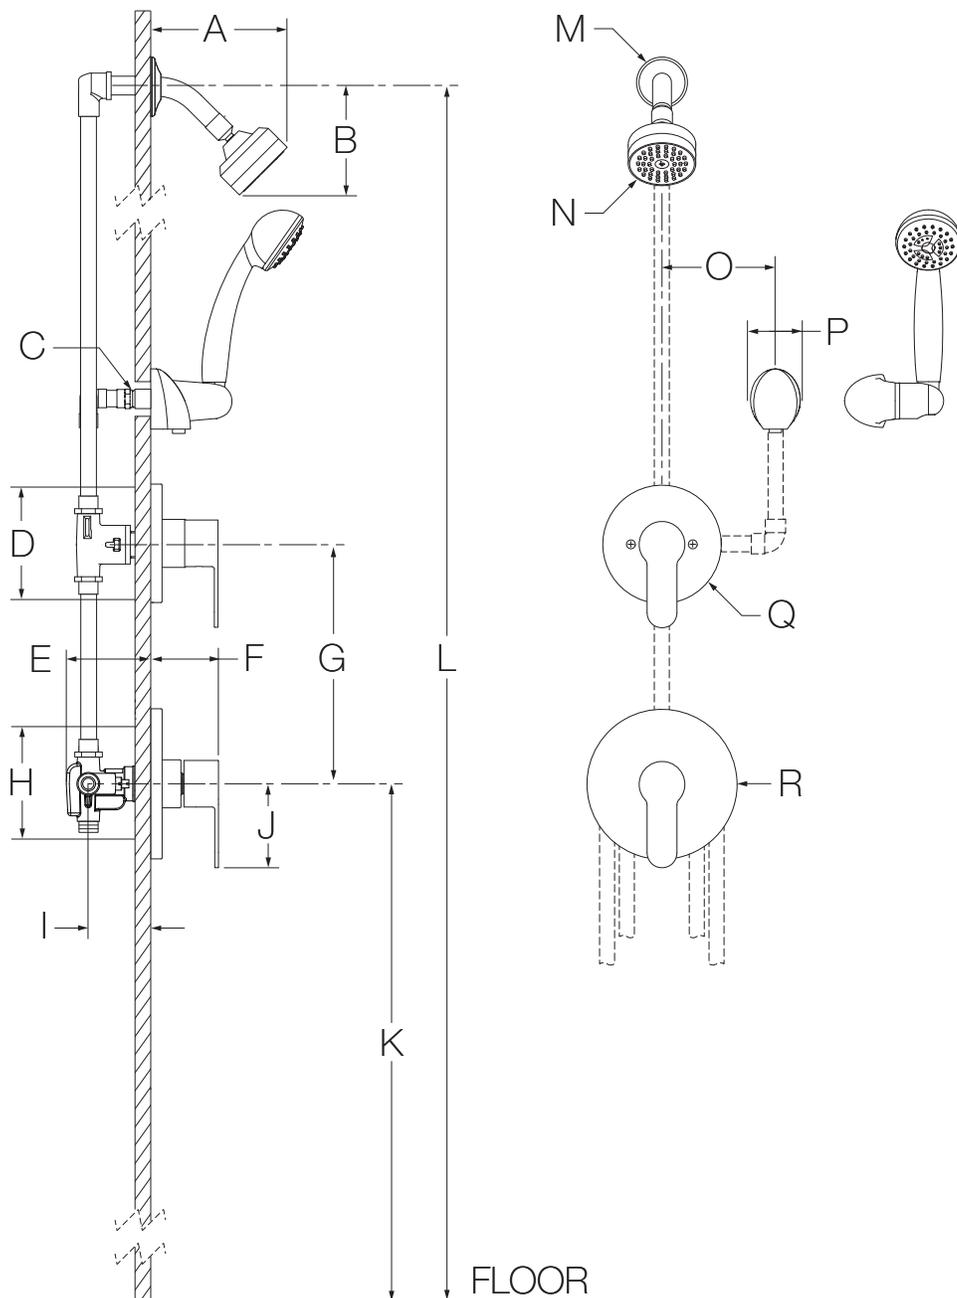

### Measurements

|   |   |
|---|---|
| A | 5-7/8", 149 mm  |
| B | 4-5/8", 117 mm  |
| C | Male 1/2" NPT fitting must be recessed 1/4" (6 mm) from finished wall |
| D | Diverter Valve Hole Size<br>Min. Ø 3", 76 mm<br>Max. Ø 3-1/4", 83 mm  |
| E | 3-1/2", 89 mm   |
| F | 2-7/8", 73 mm   |
| G | Ref. 10", 254 mm  |
| H | Shower Valve Hole Size<br>Min. Ø 3", 76 mm<br>Max. Ø 4", 102 mm       |
| I | Rough-in<br>2-3/8" ± 1/2", 60 mm ± 13 mm                              |
| J | 3-1/2", 89 mm   |
| K | Ref. 42", 1067 mm   |
| L | Ref. 77", 1956 mm   |
| M | Ø 2-1/2", 64 mm   |
| N | Ø 3-1/8", 79 mm   |
| O | 6", 152 mm  |
| P | 2-1/8", 54 mm   |
| Q | Ø 5", 127 mm  |
| R | Ø 6-3/8", 162 mm  |

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.