


Item:KF-AZ258**

ANZZI POT FILLER
INSTALL & OPERATION MANUAL

V1.0

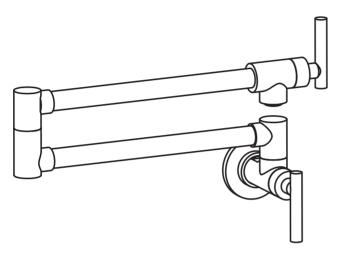

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, Φ 1-3/8" MIN.

DESCRIPTION

- Brass construction
- Thread: 1/2 NPT

FLOW

• 4 gpm @ 60 psi, 15.1 L/min @ 414 kPa

CARTRIDGE

• Brass cartridge



Certified to NSF/ANSI 61 Certified to NSF/ANSI 372

DON'T WAIT! REGISTER NOW!

Register your product within 90 days to ensure your product is recognized as an official purchase and is eligible for warranty coverage.

Mail in the completed registry card (Pg. 2) or register online at www.swcorp.com/register.



PRODUCT REGISTRATION*

IMPORTANT: YOUR WARRANTY WILL NOT BE RECOGNIZED UNLESS THIS CARD IS FULLY COMPLETED AND RETURNED OR ONLINE REGISTRATION IS COMPLETED.

To ensure that your warranty is registered and confirmed please do one of the following:

- 1. Register online at www.swcorp.com/register. You will be asked to fill out the same information you would in the registration card. Registering online is fast, secure and ensures we receive your information.
- 2. Complete, cut-out and mail the registration card below. By returning this registration card we confirm the date of purchase for your new product. This confirmation will allow us to process any warranty claims.


CUT ALONG

Mail the card to: 5701 NW 35 Avenue, Miami, FL 33142


DOTTED LINE.		
Product Registration Card		
Name		
CityStateZip		
Phone Email		
Date of Purchase		
Installer's NamePhone		
I have read the Owner's Manual carefully and understand and agree that any installation, operation or maintenance of the product must be done strictly in accordance with instructions and guidelines contained in the owner's manual and installation guide.		
SignatureDate		


Need help? For technical support call 305-614-4070 or visit us at www.ANZZI.com

CRITICAL DIMENSIONS

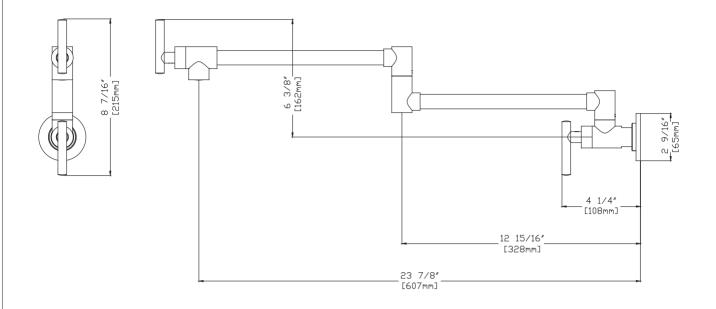

Tools Required

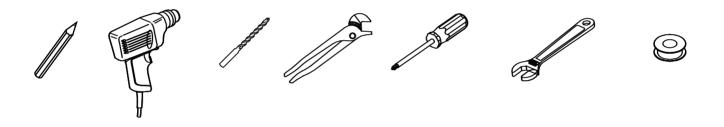

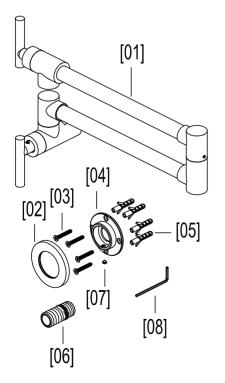


Part	Discription	Qty.
[01]	Faucet	1
[02]	Flange	1
[03]	Screw	4
[04]	Anchor	1
[05]	Plug	4
[06]	Connector	1
[07]	Hex Screw	1
[08]	Allen Wrench	1


ATTENTION


- Be sure that each parts are in the package.
- OLD FAUCET: Always turn water supply OFF before removing existing faucet or disassembling the valve. Open faucet handle to relieve water pressure and ensure that complete water shut-off has been accomplished.


1





Connect to 1/2" IPS supply line. The pipe should extend 1/2" past the finished wall surface. Using the Connector[06] if needed. WARNING: Connect to Cold Water Only.

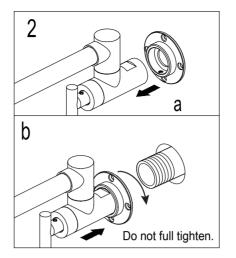




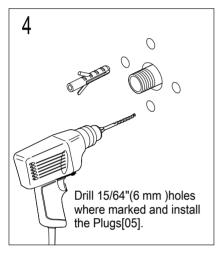






Place Flange[02] onto the faucet as shown. Thread faucet onto pipe. Tighten securely, but do not over tighten.

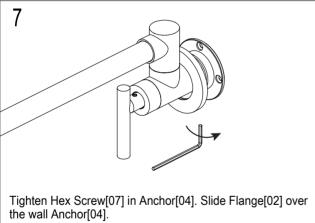

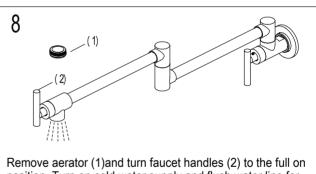

position. Turn on cold water supply and flush water line for one minute.

Important: This flushes away any debris that could cause damage to internal parts. Check all connections at for leaks. Re-tighten if necessary, but do not over tighten.

Notice: Leaks and property damage may occur from incorrect installation. Follow all installation instructions before making final connections and turning on the supplies. Shut off both handles when not in use or left unattended. Improper use or inadequate drainage below faucet may cause water damage.

CARE & MAINTANCE

- To preserve the finish on the metallic parts of your ANZZI faucet, apply non-abrasive wax, such as car wax. Any cleaners should be rinsed off immediately.
- Clean the aerator regularly for calcium build up or any blockage that reducing water flow.