


# specifications



## Single-handle Lavatory Faucet

NOTE : THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE / 3 HOLES.

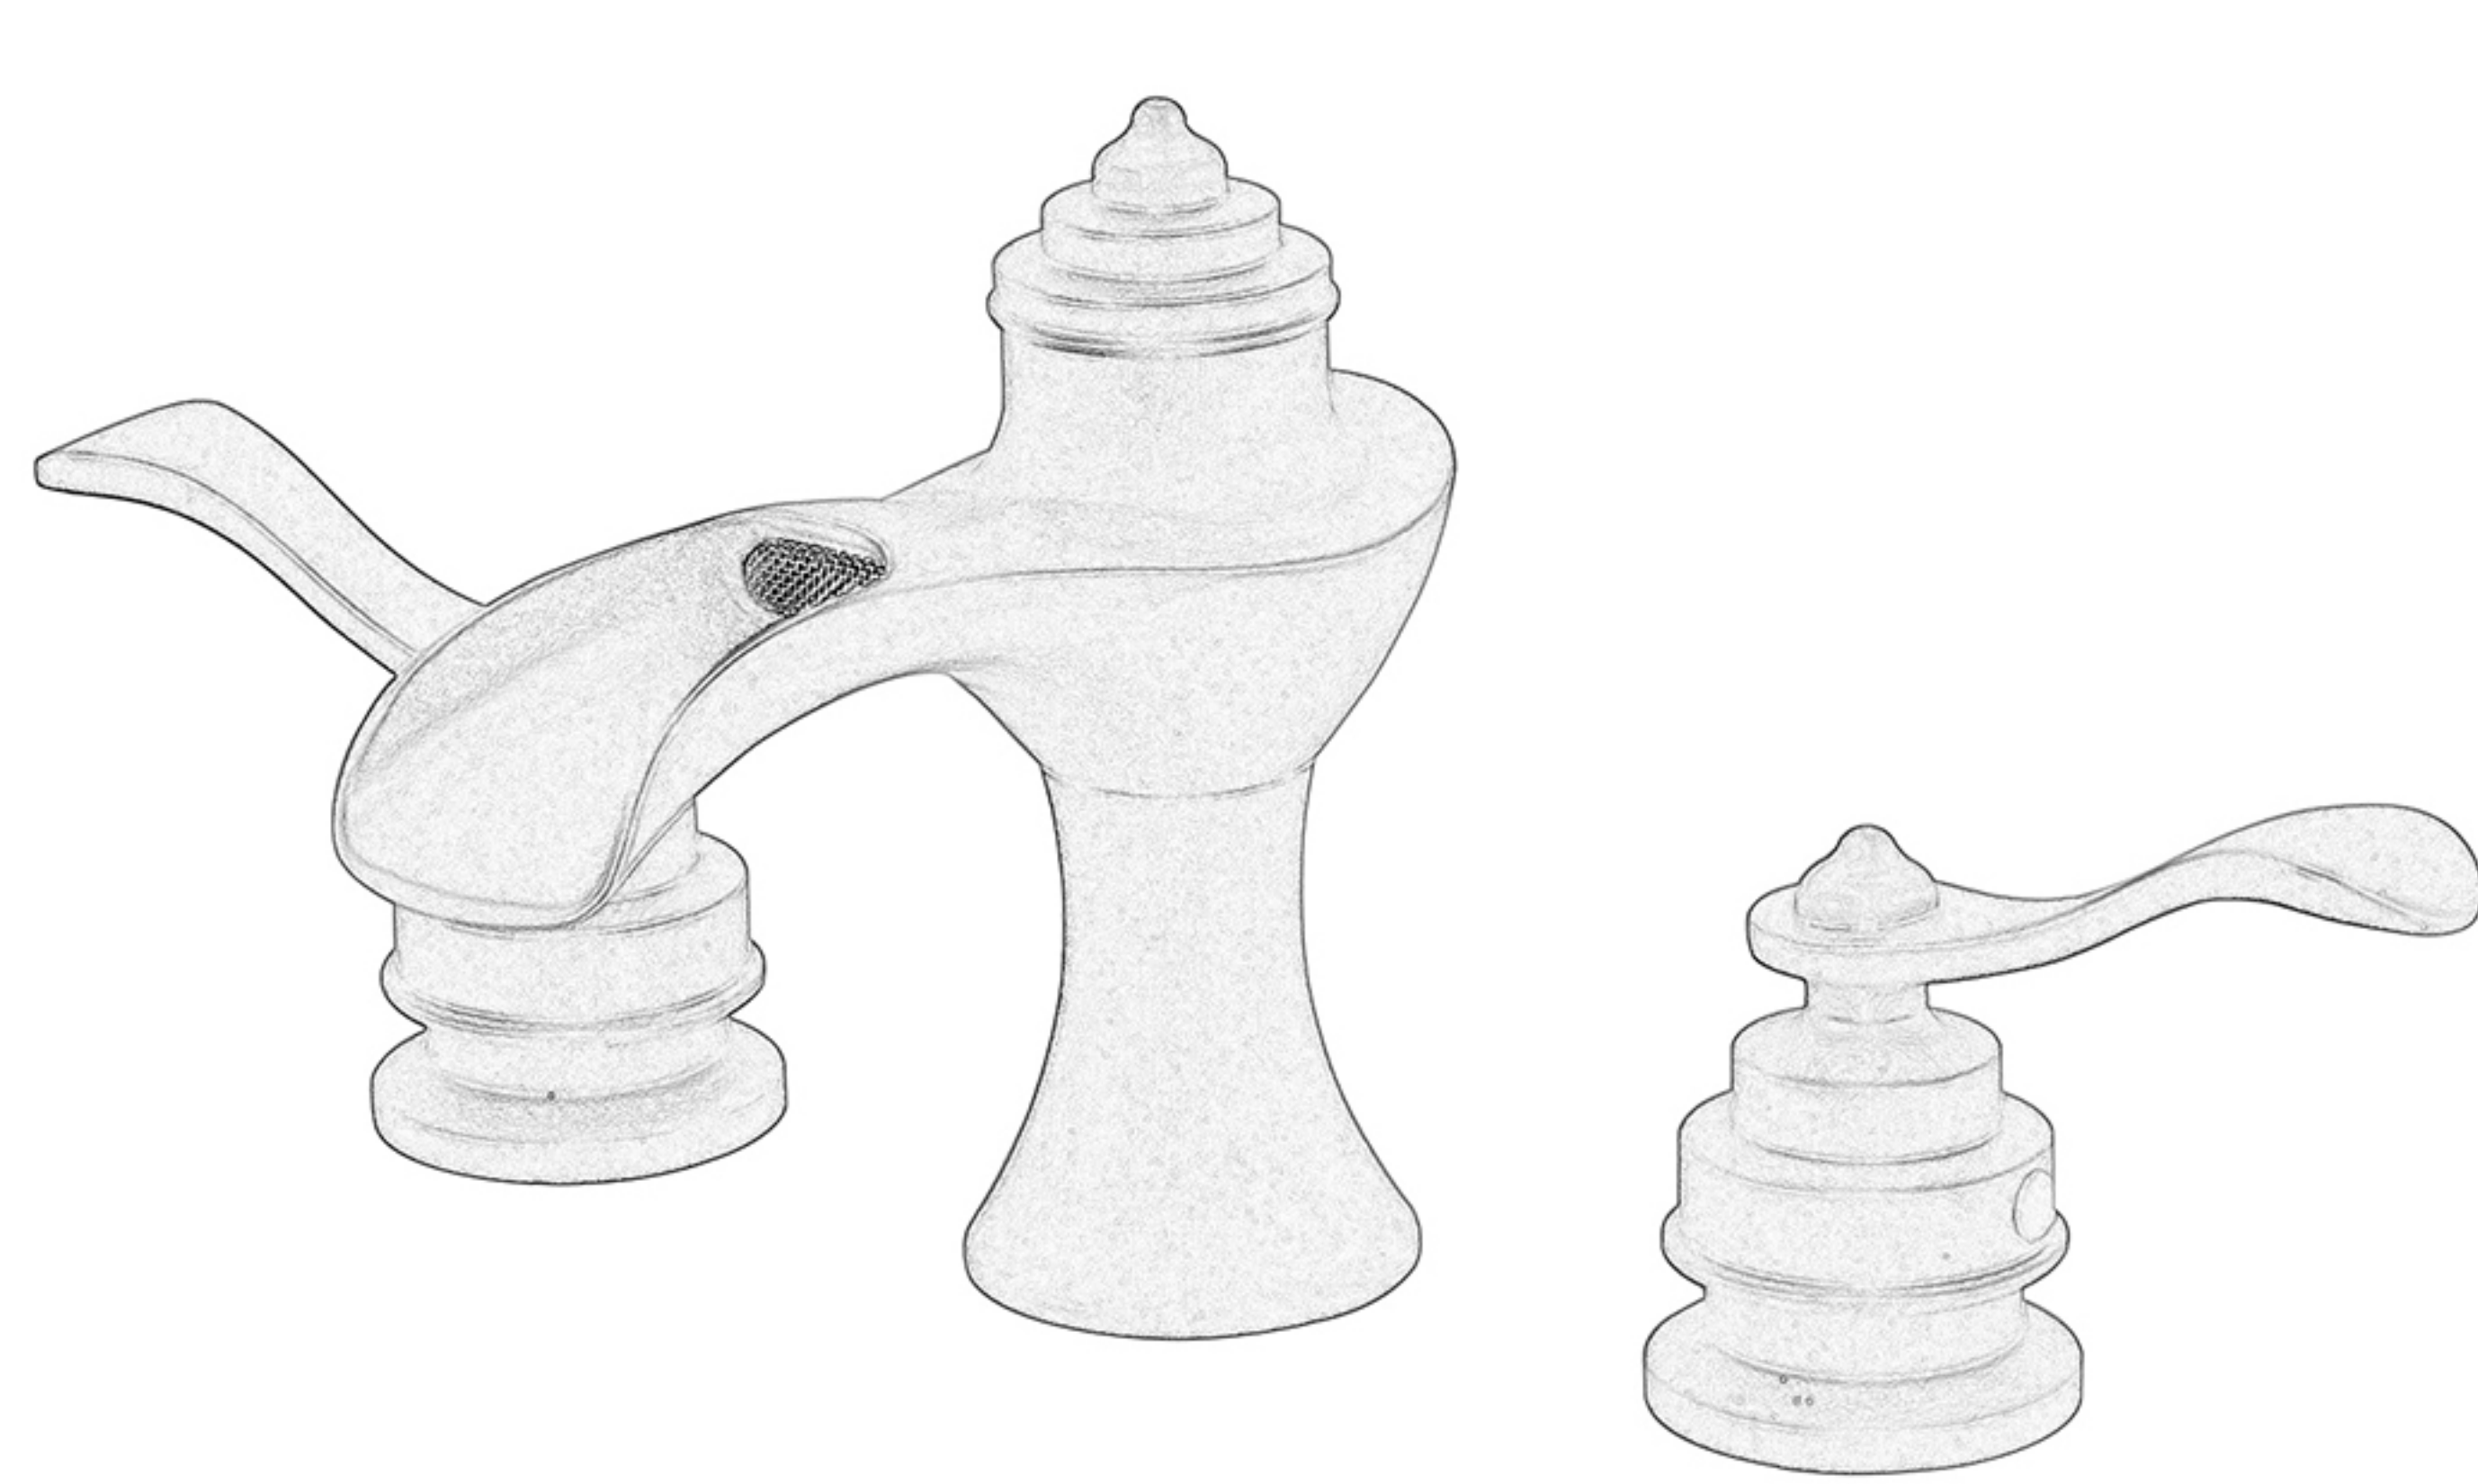

Submitted Model No.: 6573-S

Specific Features:



## BATHROOM FAUCET


■ Best Water Experience

### Notes before installation:

- 1.Please check that all components are present.
- 2.Before installation ensure that all feed lines are clear of debris and on / off valve is present.
- 3.Ensure water pressure is between 20-125 PSI ( includes combination of hot and cold feed lines ).
- 4.Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
- 5.If you will be away from home for an extended period you should shut off the main water supply.

### Daily maintenance:


- 1.Use a soft cloth and vinegar to remove hard-water spots.
- 2.Check aerator ( if present ) regularly for calcium build up are when water stream is not optimum.
- 3.DO NOT use caustic cleaning products as the use will break down finish and will void the product warranty.
- 4.Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.
- 5.If the water pressure appears to be less than optimum remove, inspect,clean or replace aerator.

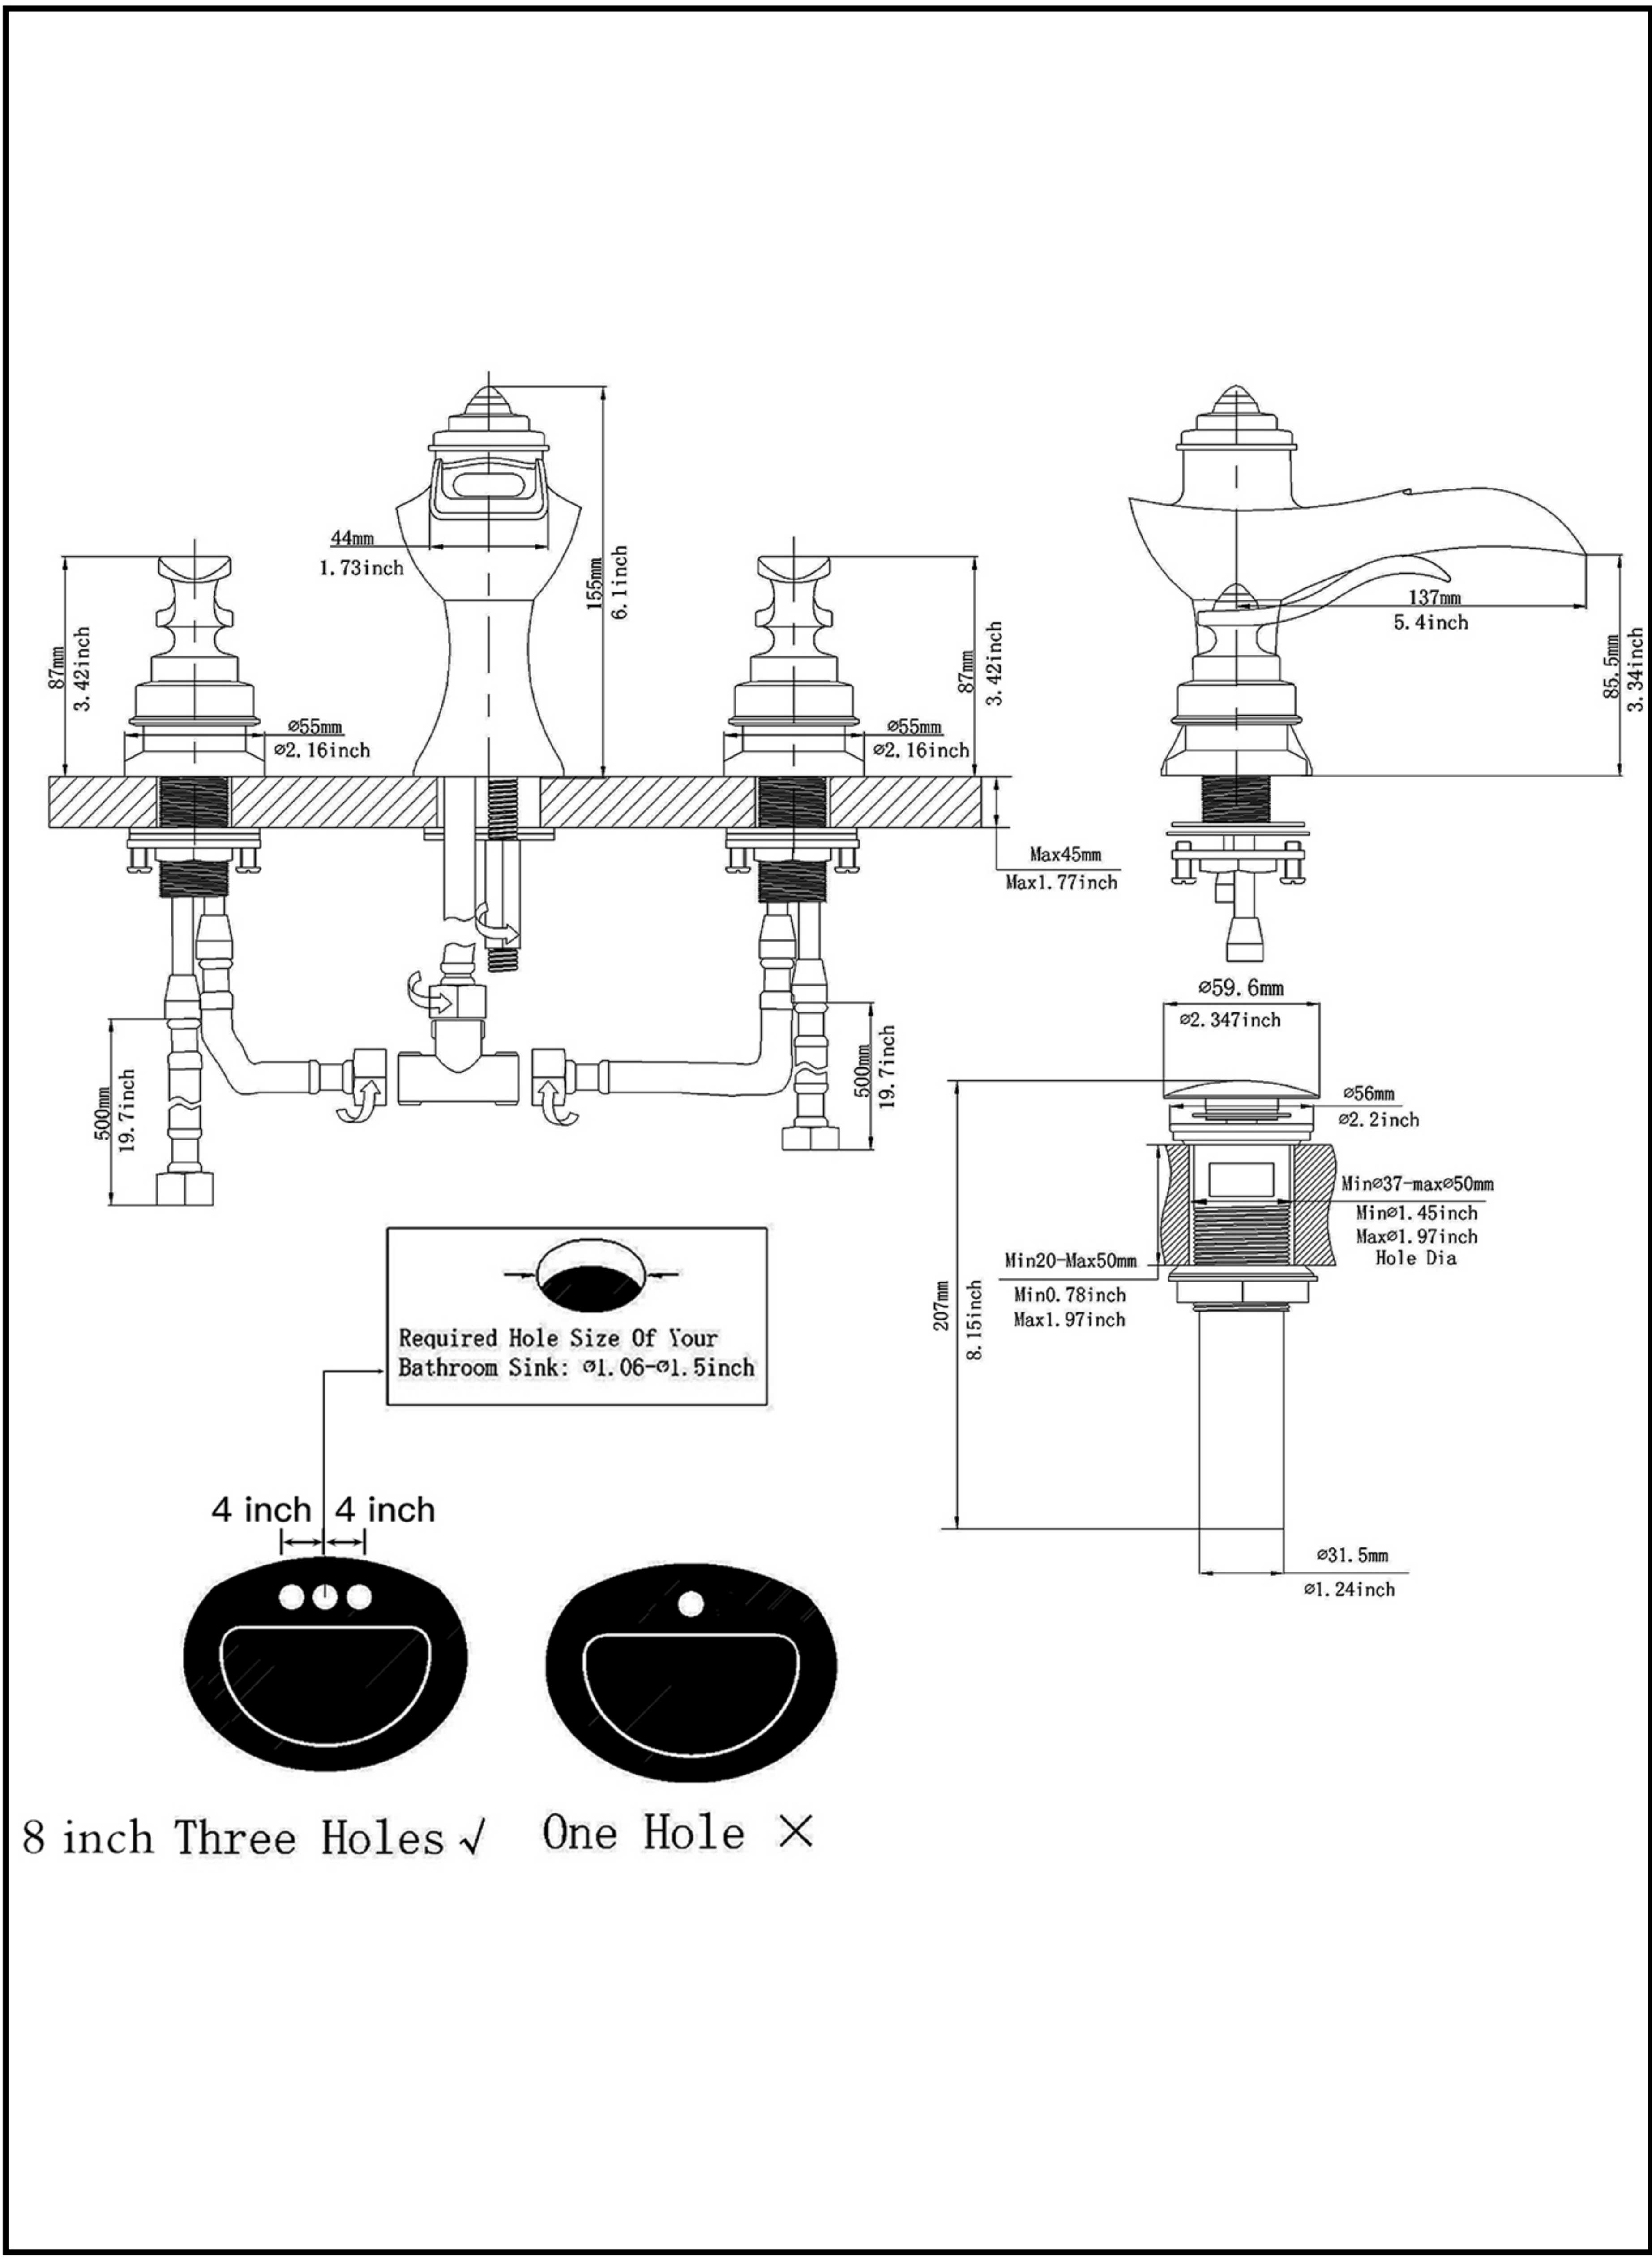

▲ Desianate proper finish suffix

- 1.Remove the rubber washer , metal washer and locking nut from the faucet.
- 2.Screw and hand tighten the hot and cold flexible hoses to the faucet . DO NOT use a wrench to tighten hoses as this may damage the hose and / or the hose threads.
- 3.Install faucet through center hole.
- 4.Re-install the rubber washer followed by the metal washer and lock-nut. Hand tighten then tighten further using a screw driver to tighten lock-nut screws.


### 1-1 Installation Sketch

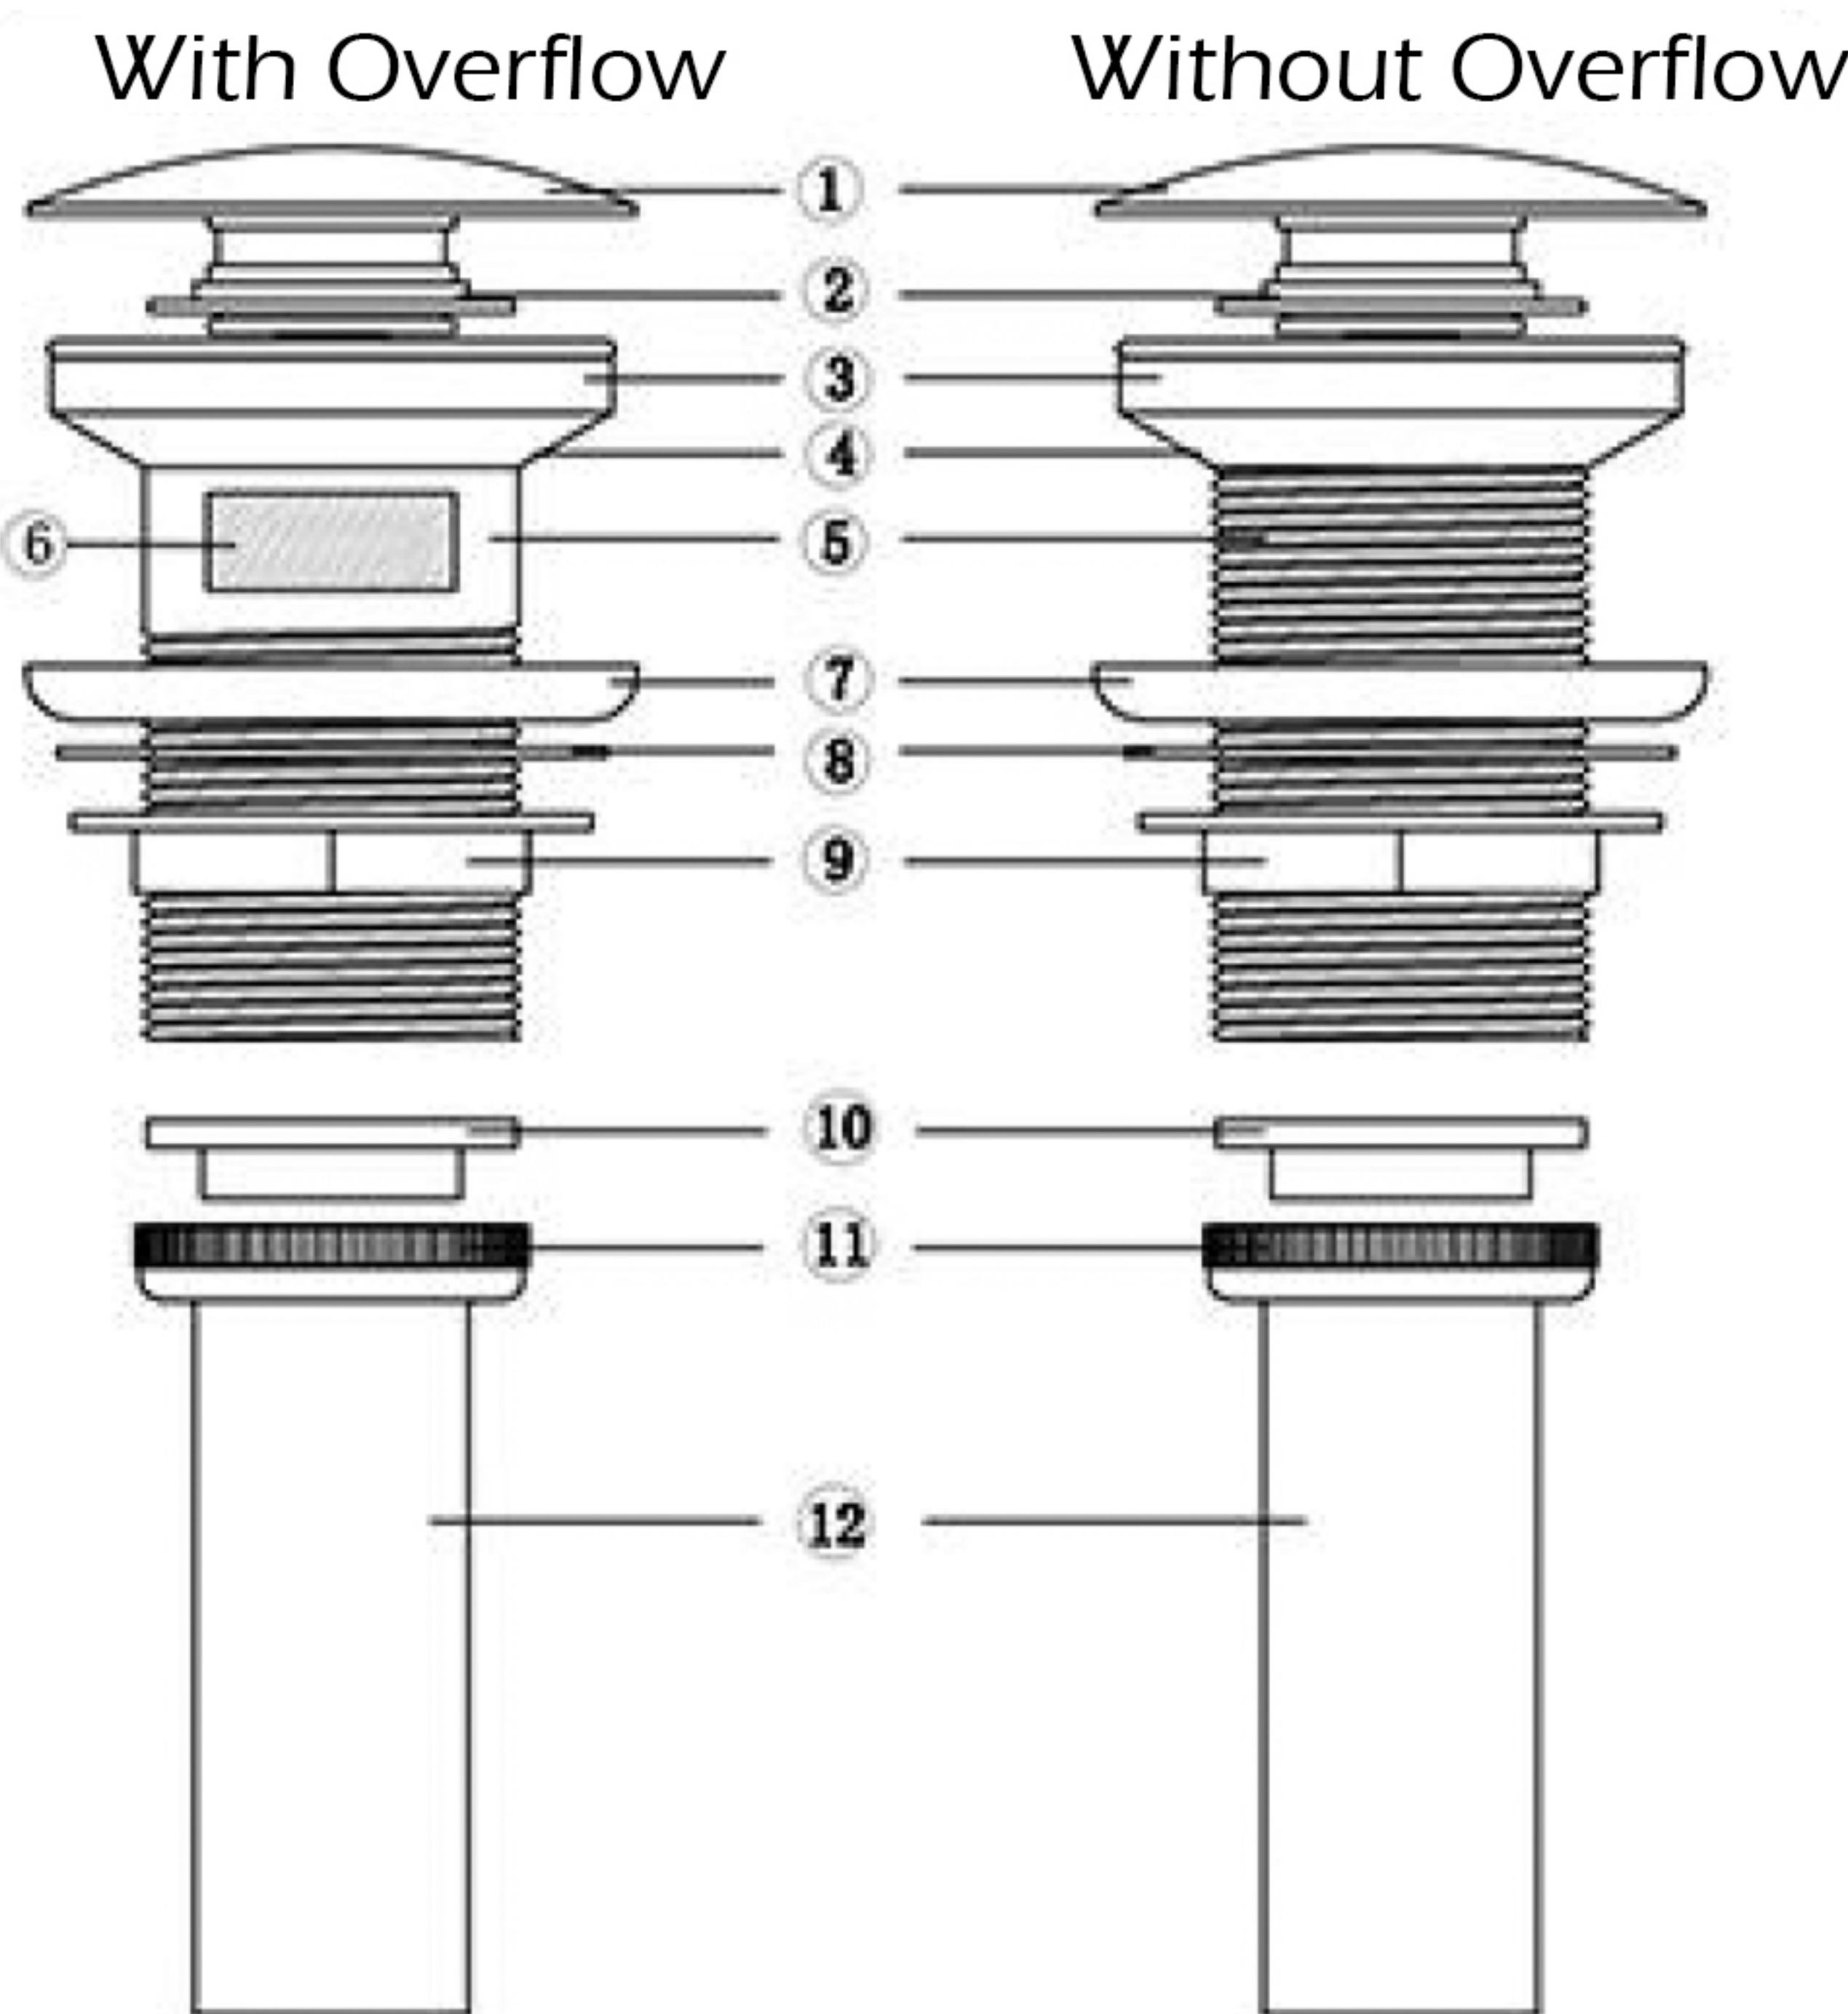

- |                  |                     |
|------------------|---------------------|
| ① Drain Cap      | ⑦ Silicon Gasket    |
| ② Silicon Gasket | ⑧ Plastic Washer    |
| ③ Sponge Gasket  | ⑨ Brass Locking Nut |
| ④ Silicon Gasket | ⑩ Rubber Gasket     |
| ⑤ Drain Bod      | ⑪ Locking Nut       |
| ⑥ Overflow       | ⑫ Tail Pipe         |

### 1-2 Installation Steps

#### Vessel Sink / Drain Installation (Overflow)

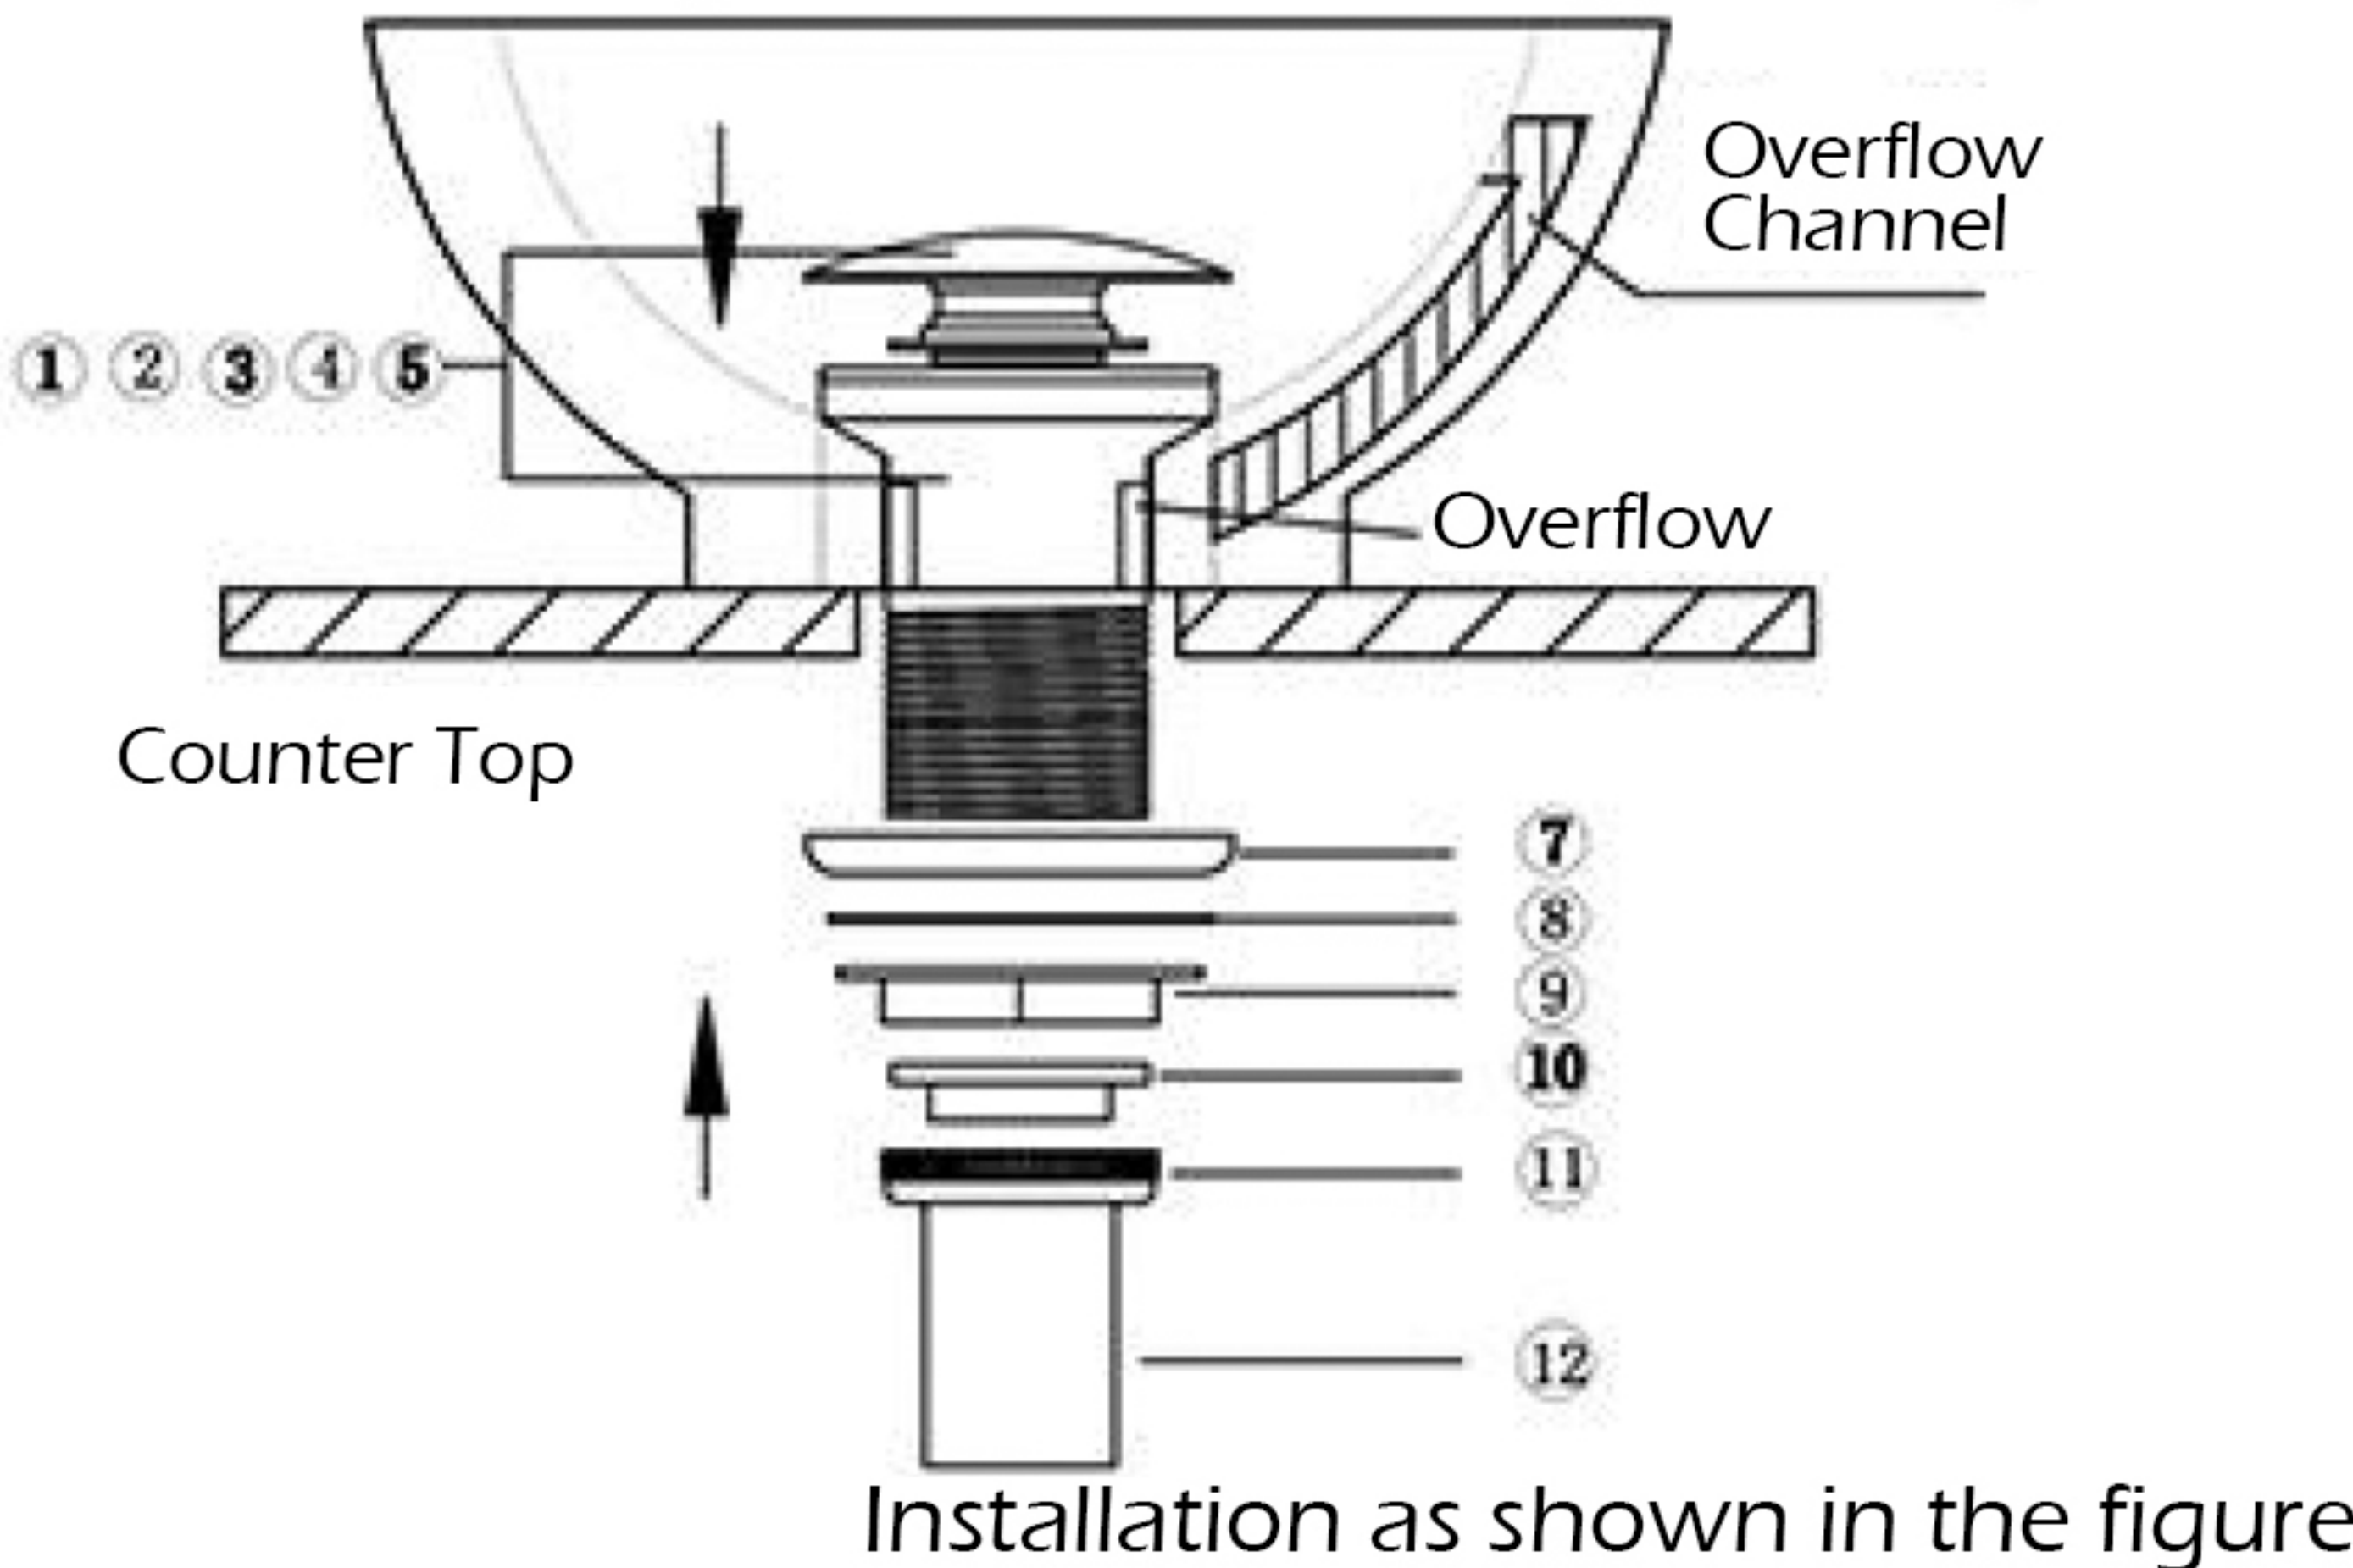

#### Vessel Sink / Drain Installation (non-overflow)

